

Index

A	Low pressure accessories -0-7 MPa-0-1000 psi	1
A1	Chemical metering valve	1
A2	Descaling pump - Detergent injection fitting	2
A3	Thermo protector valve - Inlet pressure reducer	3
A4	Low pressure guns -max.pres.2,4MPa-350psi	4
A5	Guns for chemicals	8
A6	SS Ball valves and foam guns	11
A7	Steam guns and lances	13
A8	Inlet water tank - Float valve	15
A9	Low pressure quick couplings	18
A10	Chemical suction strainers	19
A11	Water suction strainers	21
A12	Brushes	24
B	Valves	25
B1	Unloader valves -22MPa-3130psi	25
B2	Unloader valves -32 MPa-4550 psi	32
B3	Unloader valves -42 MPa-5975 psi	39
B4	Unloader valves -110 MPa-16000 psi	42
B5	Relief valves	45
B6	Safety valves	52
B7	Pressure regulating valves	53
B8	Pressure regulating valves - compressed air control	56
B9	Flow regulator valves - Regulator valves	58
C	Spray Guns	61
C1	Spray guns up to 22MPa-3130 psi	61
C2	Spray guns up to 32 MPa -4550 psi	64
C3	Compensated spray guns and lances up to 42MPa-5975 psi	70
C4	Spray guns and lances up to 110 MPa-16200psi	71
C5	Weep spray guns	73
C6	Spray guns with lance hand grip/quick coupling	75
C7	Spray guns with complete lance/nozzle adapter	81
C8	Lance extensions for guns	86
D	Lances	92
D1	Insulated lances	92
D2	Lance extensions and tubes	100
D3	Double lances	102
E	Nozzles and nozzle holders	104
E1	Special holders without nozzle	104
E2	Special holders with nozzle	106
E3	Rotating nozzles	108
E4	Sand blasters	113
E5	1/8Npt M-1/4Npt M-M4-M6-M15 nozzles	115
E6	Drain cleaning nozzles	121
F	Quick Couplings and Swivels	126
F1	Screw-type quick couplings	126
F2	Ball-type quick couplings	135
F3	Swivels	139
G	Chemical Venturi Injectors / Foamers	143
G1	Chemical Venturi injectors	143
G2	Foamers	147
H	Carwash Accessories	149
H1	Car Wash Accessories	149
I	Rotating special nozzles - Tank cleaners - Floor Cleaners	152
I1	Rotating Nozzles and Tank Cleaners	152
I2	Floor cleaners	164
J	Accessories	165
J1	Electrical accessories	165
J2	Miscellaneous accessories	169
K	Gear Reduction Boxes for Engine Motors	173
K1	Gear reduction boxes for petrol engines	173
	Nozzle Charts	175



The  tick indicates that **the item is available in stock.**



The number indicated under the box **refers to the pack size.**



Brand new item.



Electric components are in **compliance with applicable Directives.**



Components are in **compliance with Directive 94/9/CE (ATEX).**



Components are in **compliance with Directive 97/23/CE.**

**All our components are in compliance with
Directive 2011/65/CE (RoHS)**

Texts, drawings, images and all other material contained in this catalogue are the exclusive property of P.A. SpA, all forms of reproduction are strictly prohibited.

Technical data, i.e. dimension, weight, recommendations contained in this catalogue are for guidance only.

P.A. SpA reserves the right to modify the information contained on this catalogue at any time without notice.

RD3 - CHEMICAL METERING VALVE

P/N	Couplings	Hose barb		Casing colour	Weight			
		mm	in		gr	oz		
29.0945.00	1/4 Bsp MM	7	0,28	Blue	175	6,2	10	✓
29.0945.06	1/4 Bsp MM	7	0,28	Black	170	6	10	
29.0945.16	1/4 Bsp MM	7	0,28	Red	174	6,14	10	
29.0952.00	1/4 Bsp MM	-	-	Blue	126	4,44	10	✓
29.0952.10	1/4 Bsp MM	-	-	Black	126	4,48	10	✓
Rated Pressure		28 bar - 2,8 MPa			400 psi			
Permissible Pressure		30 bar - 3 MPa			435 psi			
Rated Flow		10 l/min			2,6 USGpm			
Rated Temperature		40 °C			105 °F			
Panel fitting		15 mm			3/5 in			



RDY -90° CHEMICAL METERING VALVE

P/N	Couplings	Hose barb		Casing colour	Weight			
		mm	in		gr	oz		
29.0954.00	1/4 Bsp MM	7	0,28	Black	209	7,37	10	✓
29.0954.15	1/4 Bsp MM	7	0,28	Red	210	7,47	10	
29.0960.00	1/4 Bsp MM	-	-	Black	160	5,64	10	✓
Rated Pressure		28 bar - 2,8 MPa			400 psi			
Permissible Pressure		30 bar - 3 MPa			435 psi			
Rated Flow		10 l/min			2,6 USGpm			
Rated Temperature		40 °C			105 °F			
Panel fitting		17 mm			3/4 in			



RD5 - CHEMICAL METERING VALVE

P/N	Couplings	Hose barb		Col.	Weight			
		mm	in		gr	oz		
29.0980.00	1/4 Bsp MM	7	0,28	Blue	213	7,5	10	✓
29.0980.50	1/4 Bsp MM	7	0,28	Red	213	7,5	10	
Rated Pressure		28 bar - 2,8 MPa			400 psi			
Permissible Pressure		30 bar - 3 MPa			435 psi			
Rated Flow		10 l/min			2,6 USGpm			
Rated Temperature		40 °C			105 °F			
Panel fitting		15 mm			3/5 in			



Fluid quantity is adjusted through knob rotation

RD6 - TWIN INLET CHEMICAL VALVE

P/N	Hose barb		Weight			
	mm	in	gr	oz		
29.0900.00	7	0,28	62	2,19	10	✓
Rated Pressure		0,5 bar - 0,05 MPa			7,3 psi	
Rated Flow		1 l/min			0,26 USGpm	
Rated Temperature		60 °C			140 °F	
Panel fitting		14,5 mm			0,57 in	



Fluid mixing regulated through knob rotation



DA - DESCALING PUMP

P/N	Max. Voltage	Frequency	Flow rate	Weight			
	Volt	Hz	g/h	gr	oz		
12.5010.00	24 V	50 Hz	24	300	10,58	5	✓
12.5011.00	230 V	50 Hz	24	290	10,2	5	✓
Rated Pressure		0,5 bar - 0,05 MPa		7 psi			



PLUNGER METERING PUMP

P/N	Inlet	Outlet	Weight			
			gr	oz		
52.0000.00	1/2 Bsp M	1/2 Bsp M	2300	81	1	
Plastic pump head - Displacement 8,7 cc/rev						
Rated Pressure		20 bar - 2 MPa		290 psi		
Max. RPM				120 giri/min		



TANK AND HOSE FOR DESCALING PUMP

P/N	Equipment	Volume		Hose Ø		Weight			
		L	USg	mm	in	gr	oz		
14.6501.00	Tank	1,0	0,26	-		106	3,74	10	✓
14.6505.00	Tank	2,0	0,52	-		193	6,81	10	✓



INJECTOR FITTING

P/N	Inlet	Outlet	Couplings	Weight			
				gr	oz		
21.0300.61	3/4 Bsp M	1/2 Bsp M	2 × 1/8 Bsp F	113	3,99	10	✓
Rated Pressure		22 bar - 2,2 MPa		320 psi			
Rated Flow		30 l/min		8 USGpm			
Rated Temperature		90 °C		195 °F			
Material				Zinc plated steel			



It injects detergent into pump suction port

VT6 - THERMO PROTECTOR VALVE

P/N	Inlet	Operating temperatur.		Mat.	Weight				
		°C	°F		gr	oz			
60.0630.00	1/4 Bsp M	63	145	Brass	51	1,8	15	✓	
60.0640.00	1/4 Bsp M	63	145	Sst Ai 303	51	1,8	15		
60.0630.15	1/4 Npt M	63	145	Brass	52	1,8	15		
60.0630.50	3/8 Bsp M	63	145	Brass	35	1,23	15	✓	
60.0098.00	3/8 Npt M	63	145	Brass	37	1,31	15		
60.0630.70	1/2 Bsp M	63	145	Brass	52	1,8	15	✓	
Rated Pressure		10 bar - 1 MPa		145 psi					
Hose barb		7 mm		0,28 in					



VT.BP.1 - THERMO PROTECTOR / MAX.INLET PRESS.VALVE

P/N	Inlet	Operating temperatur.		Operat. press.	Weight				
		°C	°F		bar - MPa	psi	gr	oz	
28.0600.15	1/2 Bsp M	63	145	10 - 1	145	142	5,02	5	✓
28.0600.00	1/2 Npt M	63	145	10 - 1	145	142	5,02	5	
Rated Pressure		10 bar - 1 MPa		145 psi					
Hose barb		7 mm		0,28 in					



RP1 - INLET PRESSURE REDUCER

P/N	Working press.		Couplings	Weight			
	bar - MPa	psi		gr	oz		
28.0700.00	1,5 - 0,15	20	1/2 Bsp F	266	9,4	5	✓
Permissible Pressure		29 bar - 2,9 MPa		290 psi			
Rated Flow		32 l/min		8,5 USGpm			
Rated Temperature		70 °C		158 °F			





RB 35 - 50° C

P/N	Inlet	Nozzle type	Weight			
			gr	oz		
30.6200.00	+ sw. 1/2 Bsp F	Cone	446	15,73	10	✓
Rated Pressure	12 bar - 1,2 MPa		175 psi			
Rated Flow	50 l/min		13,2 USGpm			
Rated Temperature	50 °C		120 °F			
Material			PP+FG- Brass			
Seals material			Viton			
Casing colour			Blue			



RB 35 - 80° C - LOW PRESSURE GUN

P/N	Inlet	Nozzle type	Weight			
			gr	oz		
30.6250.00	+ sw. 1/2 Bsp F	Cone	454	16,01	10	✓
Rated Pressure	12 bar - 1,2 MPa		175 psi			
Rated Flow	50 l/min		13,2 USGpm			
Rated Temperature	80 °C		176 °F			
Material			PA+gf- Ai303			
Seals material			Epdm			
Casing colour			Blue			



RB 35 - ON-OFF DEVICE

P/N	Rated Temper.		Material	Seals material	Weight			
	°C	°F			gr	oz		
30.6225.00	50	120	PP+FG - S.S.T. Ai.303	Viton	440	15,42	10	✓
30.6260.00	80	176	PA+gf- Ai303	Epdm	440	15,42	10	
Rated Pressure	12 bar - 1,2 MPa		175 psi					
Rated Flow	50 l/min		13,2 USGpm					
Inlet			1/2 Bsp F					
Outlet			1/2 Bsp F					
Casing colour			Blue					



RB 65 - AISI 316 ADJUSTABLE SPRAY PATTERN

P/N	Inlet	Nozzle Size	Weight			
			gr	oz		
30.6300.00	1/2 Bsp F	0 - 60	904	31,88	1	✓
30.6310.00	+ sw.5 1/2 Bsp F	0 - 60	1008	35,55	1	✓



Rated Pressure	24 bar - 2,4 MPa	350 psi
Rated Flow	60 l/min	16 USGpm
Rated Temperature	90 °C	195 °F
Material	Stainless steel AISI 316	
Casing colour	Blue	
Trigger casing	Gray	

**RB 65 - ADJUSTABLE SPRAY PATTERN - BRASS PISTON**

P/N	Casing colour	Trigger casing	Inlet	Nozzle Size	Weight			
					gr	oz		
30.6400.00	Blue	Blue	1/2 Bsp F	0 - 60	944	33,3	10	✓
30.6500.00	White	Red	1/2 Bsp F	0 - 60	944	33,3	10	
30.6400.50	Blue	Blue	1/2 Npt F	0 - 60	944	33,3	10	
30.6425.00	Blue	Blue	+ sw.5 1/2 Bsp F	0 - 60	1060	37,39	10	✓
30.6425.50	Blue	Blue	+ sw.5 1/2 Npt F	0 - 60	1060	37,39	10	
30.6520.00	White	Blue	+ sw.5 1/2 Bsp F	0 - 60	1060	37,39	10	




Sst swivel pin.

30.6430.00	-	-	13mm hose barb	-	66	2,33	10	
------------	---	---	----------------	---	----	------	----	--

Swivel, suitable for RB65 -p/n. 30.6400.00

Rated Pressure	24 bar - 2,4 MPa	350 psi
Rated Flow	60 l/min	16 USGpm
Rated Temperature	90 °C	195 °F
Material	Brass	
Piston Material	Brass	
Casing colour	Blue	





RB 65 - ADJUSTABLE SPRAY PATTERN -SST.SHAFT

P/N	Casing colour	Trigger casing	Inlet	Nozzle type	Weight			
					gr	oz		
30.6438.30 + Stainless Steel shaft	Red	Red	+ sw.5 1/2 Bsp F	0 - 60	1060	37,39	10	✓
30.6455.00 + Stainless Steel shaft	Blue	Blue	1/2 Bsp F	0 - 60	944	33,3	10	✓
30.6510.00 + Stainless Steel shaft	White	Blue	1/2 Bsp F	0 - 60	944	33,3	10	

Rated Pressure	24 bar - 2,4 MPa	350 psi
Rated Flow	60 l/min	16 USGpm
Rated Temperature	90 °C	195 °F
Material		Brass
Piston Material		Sst. Ai303



RB 65 - ADJUSTABLE SPRAY PATTERN- 100 L/MIN

P/N	Inlet	Nozzle Size	Weight			
			gr	oz		
30.6440.00	1/2 Bsp F	0 - 100	941	33,2	10	✓
30.6440.50	1/2 Npt F	0 - 100	941	33,2	10	
30.6445.00	+ sw.5 1/2 Bsp F	0 - 100	1060	37,39	10	✓
30.6445.50	+ sw.5 1/2 Npt F	0 - 100	1060	37,39	10	

Rated Pressure	24 bar - 2,4 MPa	350 psi
Rated Flow	100 l/min	26,5 USGpm
Rated Temperature	90 °C	195 °F
Material		Brass
Casing colour		Blue



RB 65-350 - 350 MM LANCE - ADJUSTABLE SPRAY PATTERN

P/N	Casing colour	Nozzle Size	Weight			
			gr	oz		
30.6465.00	Blue	0 - 60	2020	71,25	5	✓
30.6468.00	Red	0 - 60	2020	71,25	5	✓

Rated Pressure	24 bar - 2,4 MPa	350 psi
Rated Flow	60 l/min	16 USGpm
Rated Temperature	90 °C	195 °F
Inlet		1/2 Bsp F
Length	350 mm	13,8 in.
Material		Brass



RB 65 - ON-OFF DEVICE

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.6450.00	1/2 Bsp F	1/2 Bsp F	1042	36,75	10	✓
30.6453.00	+ sw.5 1/2 Bsp F	1/2 Bsp F	1154	40,7	10	✓
Rated Pressure			24 bar - 2,4 MPa		350 psi	
Rated Flow			100 l/min		26,5 USGpm	
Rated Temperature			90 °C		195 °F	
Material			Brass			
Casing colour			Blue			



EXTENSION RB 65 WITH ON-OFF DEVICE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.6456.40	400	15,7	1/2 Bsp M	1/2 Bsp F	660	23,28	1	
30.6456.80	800	31,4	1/2 Bsp M	1/2 Bsp F	1138	40,14	1	
Rated Pressure			24 bar - 2,4 MPa		350 psi			
Rated Flow			100 l/min		26,5 USGpm			
Rated Temperature			43 °C		109 °F			
Material					Stainless steel			





CP12 - GUN FOR CHEMICALS 2,5 MPA

P/N	Mat.	Trigger	Weight			
			gr	oz		
15.0003.12	PP+ viton	Blue	128	4,51	10	✓
15.0003.11	PP+ Nbr	Red	128	4,51	10	
15.0013.12	PP+viton+Aisi 316	Grey	131	4,62	10	✓

Suitable for use with very aggressive chemicals

Rated Pressure	25 bar - 2,5 MPa	365 psi
Rated Flow	70 l/min	18,5 USGpm
Rated Temperature	50 °C	120 °F
Inlet		1/2 Bsp F
Outlet		1/2 Bsp F



CP12 - GUN FOR CHEMICALS 6 MPA

P/N	Mat.	Trigger	Weight			
			gr	oz		
15.0003.10	Pa66 reinf.	Yellow	162	5,7	10	

Rated Pressure	60 bar - 6 MPa	870 psi
Rated Flow	70 l/min	18,5 USGpm
Rated Temperature	50 °C	120 °F
Inlet		1/2 Bsp F
Outlet		1/2 Bsp F



SUCTION STRAINER FOR CP12 GUN

P/N	Hole size		Weight			
	mm	in	gr	oz		
13.0003.46	18,2	0,72	2	0,07	10	

Rated Pressure	40 bar - 4 MPa	580 psi
Rated Flow	70 l/min	18,5 USGpm
Rated Temperature	60 °C	140 °F
Filtration parameter	25 mesh	700 µm
Material		PP + FG
Gun type		CP 12



CP600 - CP12+600 MM PVC LANCE - 110° FLAT FAN NOZZLE

P/N	Nozzle Size	Weight			
		gr	oz		
15.0006.01	02	232	8,18	10	
15.0006.02	03	230	8,11	10	✓
15.0006.03	04	232	8,18	10	
15.0006.04	045	236	8,32	10	
15.0006.05	06	231	8,15	10	
15.0006.06	08	234	8,25	10	

Rated Pressure	15 bar - 1,5 MPa	217 psi
Rated Temperature	50 °C	120 °F
Length	600 mm	23,6 in.
Gun type		CP12 PP+viton
Tube type		Pvc
Nozzle type		Flat fan
Inlet		1/2 Bsp F

Supplied with 110° fan nozzle in thermoplastic material - p/n° 2.0150.01-07



CP1200 - CP12 +1200 MM PVC LANCE - 110° FLAT FAN NOZZLE

P/N	Nozzle Size	Weight			
		gr	oz		
15.0012.02	03	321	11,33	10	 
15.0012.04	045	314	11,08	10	

Rated Pressure	15 bar - 1,5 MPa	217 psi
Rated Temperature	50 °C	120 °F
Length	1200 mm	47,2 in.
Gun type	CP12 PP+viton	
Tube type	Pvc	
Nozzle type	Flat fan	
Inlet	1/2 Bsp F	

Supplied with 110° fan nozzle in thermoplastic material - p/n° 2.0150.01-07



CP600 - CP12 + 600 MM PVC LANCE - CONE NOZZLE

P/N	Nozzle Size	Weight			
		gr	oz		
15.0006.51	025	240	8,5	10	 
15.0006.52	035	240	8,5	10	
15.0006.53	05	234	8,25	10	

Rated Pressure	25 bar - 2,5 MPa	356 psi
Rated Temperature	50 °C	120 °F
Length	600 mm	23,6 in.
Gun type	CP12 PP+viton	
Tube type	Pvc	
Nozzle type	Cone	
Inlet	1/2 Bsp F	

Supplied with Stainless steel cone nozzle - p/n° 2.0150.51-55



CPA600 - 600 MM SST. LANCE - 110° FLAT FAN NOZZLE

P/N	Nozzle Size	Weight			
		gr	oz		
15.0216.07	01	284	10,02	10	 
15.0216.01	02	282	9,95	10	
15.0216.02	03	281	9,91	10	

Rated Pressure	15 bar - 1,5 MPa	217 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	50 °C	120 °F
Length	600 mm	23,6 in.
Gun type	CP12-04	
Tube type	Stainl. steel	
Nozzle type	Flat fan	
Inlet	1/2 Bsp F	

Supplied with 110° fan nozzle in thermoplastic material - p/n° 2.0150.01-07





CPAT 2000 SST. TELESC.LANCE - 110° 03 FLAT FAN NOZZLE

P/N	Nozzle Size	Weight			
		gr	oz		
15.0030.02	03	969	34,18	10	
Rated Pressure	15 bar - 1,5 MPa				217 psi
Rated Flow	30 l/min				8 USGpm
Rated Temperature	50 °C				120 °F
Length	1125-1965 mm				44,3-77 in.
Gun type					CP12-04
Tube type					Stainl. steel
Nozzle type					Flat fan
Inlet					1/2 Bsp F

Supplied with 110° fan nozzle in thermoplastic material - p/n° 2.0150.01-07



TW1 - 2-DETERGENT LANCE

P/N	Seals material	Nozzle Size	Weight			
			gr	oz		
15.0008.00	Viton	-	322	11,36	1	
15.0008.01	Viton	Flat 03- Cone 035	328	11,57	1	
15.0008.50	Epdm	-	321	11,32	1	
15.0008.51	Epdm	Flat 03- Cone 035	329	11,6	1	
Rated Pressure	10 bar - 1 MPa		145 psi			
Rated Flow	30 l/min		8 USGpm			
Rated Temperature	50 °C		120 °F			
Length	630 mm		24,86 in.			
Tube type			Stainl. steel			
Nozzle type			Plast.flat fan+ ss.cone			
Inlet			2 x 1/8 Bsp F			

Supplied with 110° fan nozzle in thermoplastic material - p/n° 2.0150.01-07



LANCE COUPLINGS AND HOSE BARB FOR CP 600 / CP 12 / RB35/65

P/N	Type	Outlet	Mat.	Weight			
				gr	oz		
12.0010.18	Nipple	1/4 Bsp M	Brass	49	1,74	10	
13.0003.60	Nipple	1/4 Bsp F	PP	6	0,2	5	
2.0010.01	Hose barb	8mm hose barb	Nic.pl.brass	51	1,8	5	
2.0010.02	Hose barb	10mm hose barb	Nic.pl.brass	55	1,9	5	
13.0003.38	Hose barb	13mm hose barb	PPL	8	0,28	5	
13.5032.19	Hose barb	19mm hose barb	PPL	25	0,9	10	
13.0003.50	Seal washer	--	PP	5	0,2	5	

Sealing washer 1/2"

Inlet

1/2 Bsp M




RLD SHOWER HEAD

P/N	Inlet	Weight			
		gr	oz		
29.1200.00	1/2 Bsp M	670	23,6	1	✓
Rated Pressure	5 bar - 0,5 MPa			73 psi	
Rated Flow	18 l/min			4,68 USGpm	
Rated Temperature	20 °C			68 °F	
Material	Chrome plated brass				



RPS BALL VALVE STAINLESS STEEL

P/N	Material	Hand Grip	Trigger	Type	Weight		
					gr	oz	
29.1000.00	Stainless steel 303	Handle	Blue	A	750	26,45	4
29.1030.00	Stainless steel 303	Butterfly	Blue	D	750	26,45	4
29.1050.00	Stainless steel Ai316	Handle	Red	B	750	26,45	4
29.1080.00	Stainless steel Ai316	Butterfly	Red	C	750	26,45	4
Rated Pressure	24 bar - 2,4 MPa	350 psi					
Rated Flow	80 l/min	21 USGpm					
Rated Temperature	90 °C	195 °F					
Inlet		1/2 Bsp F					
Outlet		1/2 Bsp F					
Hole size	15 mm	0,59 in					

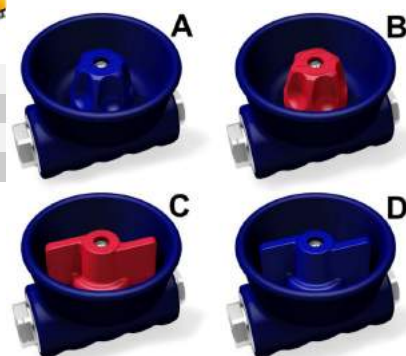

RL 60 - SST FOAM GUN -SLOW OFF SYSTEM

P/N	Inlet	Outlet	Col.	Weight			
				gr	oz		
30.3170.00	+ sw.5 1/2 Bsp F	1/2 Bsp F	Blue	616	21,73	10	✓
Inlet with swivel							
30.3170.40	+ sw.5 1/2 Bsp F	1/2 Bsp F	Red	616	21,73	10	
Inlet with swivel							
30.3170.58	+ sw.5 1/2 Bsp F	1/2 Bsp F	Blue	616	21,73	10	
Inlet with swivel Teflon seat							
30.3174.50	1/2 Npt F	1/2 Npt F	Blue	590	20,84	10	
Teflon seat							
Rated Pressure	60 bar - 6 MPa			870 psi			
Permissible Pressure	65 bar - 6,5 MPa			950 psi			
Rated Flow	60 l/min			16 USGpm			
Rated Temperature	100 °C			210 °F			
Material				Stainless steel			



RL 60 +SW GUN +ARS- B- BALL QUICK COUPLING

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.3190.00	+ sw. 1/2 Bsp F	ARS 178 B	689	24,3	2	✓
Inlet with swivel						
Rated Pressure	60 bar - 6 MPa		870 psi			
Permissible Pressure	65 bar - 6,5 MPa		950 psi			
Rated Flow	60 l/min		16 USGpm			
Rated Temperature	100 °C		210 °F			
Material	Stainless steel					






FOAM LANCE X ARS 178 - STAINLESS STEEL

P/N	Length		Inlet	Col.	Outlet	Nozzle material	Type	Weight		
	mm	in.						gr	oz	
40.0280.00	200	8	ARS 178 "A"	Black	--	Brass	A	320	10,44	2
40.0280.50	200	8	ARS 178 "A"	Blue	1/2 Bsp F	--	B	320	10,44	2 ✓
40.0280.60	200	8	ARS 178 "A"	Blue	--	Brass	C	320	10,44	2
40.0280.80	200	8	ARS 178 "A"	Blue	--	St. steel	D	296	10,44	2
40.0290.00	25	1	ARS 178 "A"	Black	--	Brass	E	77	2,72	2
40.0290.50	25	1	ARS 178 "A"	Blue	1/2 Bsp F	--	F	77	2,72	2
40.0290.60	25	1	ARS 178 "A"	Blue	--	Brass	G	143	5,04	2
40.0290.80	25	1	ARS 178 "A"	Blue	--	St. steel	H	128	4,51	2
40.0294.31	25	1	ARS 178 "A"	White	--	Brass	L	128	4,51	5 ✓
40.0292.51	25	1	ARS 178 "A"	White	--	St. steel	M	128	4,51	5 ✓
40.0296.30	25	1	ARS 178 "A"	Yellow	1/4 Npt F	Pom	N	128	4,51	5
Nozzle 60.30										
40.0296.50	25	1	ARS 178 "A"	Blue	1/4 Npt F	St. steel	P	135	4,76	5
Nozzle 25.40										

Rated Pressure	125 bar - 12,5 MPa	1825 psi
Permissible Pressure	140 bar - 14 MPa	2025 psi
Rated Flow	50 l/min	13,2 USGpm
Rated Temperature	90 °C	195 °F
Couplings	Stainless steel AISI 303	
Tube type	Stainl. steel	
Nozzle type	50°-200	

Lances with tip protector and nozzle holder.

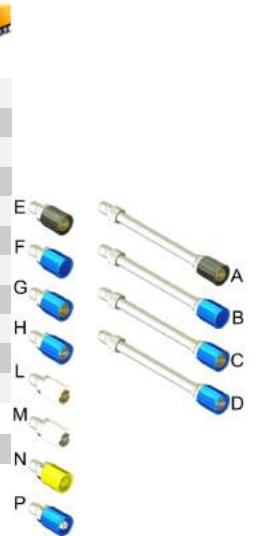

RV 23 STEAM GUN

P/N	Switch	Elect.Connec.	Weight  		
			gr	oz	
30.6030.00	Reed Switch	Micro-fit 2 pins M	460	16,22	10
30.6100.00	Reed Sw.+ 1 lamp button	Micro-fit 4 pins M	468	16,51	10 
30.6150.00	Reed Sw.+ 2 lamp buttons	Micro-fit 6 pins M	487	17,2	10

Rated Pressure	10 bar - 1 MPa	145 psi
Steam Rated Flow	35 kg/h	77 lb/h
Rated Temperature	180 °C	356 °F
Inlet		1/4 Bsp F
Outlet		1/4 Bsp F
Max. Voltage		24V AC
Max. Curr. Strength		0,4 A
Degree of Protection		IPX 3
Protection Class		III
Couplings		PG 21 mm



RV 23 FREE FLOW STEAM GUN

P/N	Switch	Elect.Connec.	Weight  		
			gr	oz	
30.6020.00	Reed Sw.+ 1 lamp button	Micro-fit 4 pins M	455	16,05	10

Rated Pressure	10 bar - 1 MPa	145 psi
Steam Rated Flow	35 kg/h	77 lb/h
Rated Temperature	180 °C	356 °F
Inlet		1/4 Bsp F
Outlet		1/4 Bsp F
Max. Voltage		24V AC
Max. Curr. Strength		0,4 A
Degree of Protection		IPX 3
Protection Class		III
Couplings		PG 21 mm



RV 23 STEAM GUN+ AR3/23 B M22 EX

P/N	Switch	Elect.Connec.	Weight  		
			gr	oz	
30.6130.00	Reed Switch	Micro-fit 2 pins M	594	20,95	10
30.6145.00	Reed Sw.+ 1 lamp button	Micro-fit 4 pins M	468	16,5	10

Rated Pressure	10 bar - 1 MPa	145 psi
Steam Rated Flow	35 kg/h	77 lb/h
Rated Temperature	180 °C	356 °F
Inlet		1/4 Bsp F
Outlet		AR 3/23 B M22 ex
Max. Voltage		24V AC
Max. Curr. Strength		0,4 A
Degree of Protection		IPX 3
Protection Class		III
Couplings		PG 21 mm



RV 23 FREE FLOW STEAM GUN+ AR3/23 B M22 EX

P/N	Switch	Elect.Connec.	Weight  		
			gr	oz	
30.6140.00	Reed Sw.+ 1 lamp button	Micro-fit 4 pins M	598	21,09	10 

Rated Pressure	10 bar - 1 MPa	145 psi
Steam Rated Flow	35 kg/h	77 lb/h
Rated Temperature	180 °C	356 °F
Inlet		1/4 Bsp F
Outlet		AR 3/23 B M22 ex
Max. Voltage		24V AC
Max. Curr. Strength		0,4 A
Degree of Protection		IPX 3
Protection Class		III
Couplings		PG 21 mm





EXTENSIONSK7 K /S3 -AR3A ES.M22 QUICK COUPLING-1/4M BSP

P/N	Type	Length		Hand Grip	Weight			
		mm	in.		gr	oz		
40.2525.00	Straight	250	9,85	S7 k	212	7,48	20	
40.2525.40	Bent	250	9,85	S7 k	214	7,55	20	
40.2550.00	Straight	450	17,72	S3	378	13,33	20	
40.2550.40	Bent	450	17,72	S3	378	13,33	20	
40.2590.00	Straight	900	35,43	S3	572	20,17	20	
40.2605.00	Straight	1050	41,33	S3	640	22,57	20	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		AR 3 A M22 hex
Outlet		1/4 Bsp M
Material		Stainless steel



TANK - 4 LITERS

P/N	Type	Weight			
		gr	oz		
28.2000.00	w/o ports	480	16,5	25	✓
28.2000.10	1 port	475	16,75	25	✓
28.2000.15	2 ports	470	16,58	10	
28.2000.20	3 ports	480	16,5	10	

Tank	4 L	1,05 USg
Volume	5,6 L	1,48 USg
Rated Temperature	60 °C	140 °F
Material		PPL



TANK - 4 LITERS WITH FLOAT VALVE / HOSE BARB

P/N	Inlet	Hose barb		Type	Weight			
		mm	in		gr	oz		
28.2020.00	3/8 Bsp M	20	0,78	Straight	834	29,42	1	✓
Straight 20 mm hose barb								
28.2020.10	3/8 Bsp M	20	0,78	Bent	844	29,77	1	✓
Bent 20 mm hose barb								

Supplied with : Suction strainer - 3/8 Bsp M brass float valve - Safety hose outlet 13mm - 20mm hose barb



TANK - 4 LITERS WITH FLOAT VALVE -OUTLET 1/2 BSP M

P/N	Inlet	Outlet	Weight			
			gr	oz		
28.2052.00	3/4 Bsp M	1/2 Bsp M	611	21,55	1	✓
Plastic float valve						

Supplied with : Suction strainer- 3/4 Bsp M float valve- Outlet 1/2 Bsp M



ACCESSORIES FOR TANKS

P/N	Inlet	Outlet	Type	Weight			
				gr	oz		
28.2021.00	3/8 Bsp M	13mm hose barb	Elbow	7	0,25	10	✓
29.0171.31	3/8 Bsp F	--	Nut	10	0,4	50	
12.2023.00	1/2 Bsp M	20mm hose barb	Elbow	14	0,49	10	✓
2.0090.15	1/2 Bsp M	1/2 Bsp M	Nipple	12	0,42	5	
13.5031.84	1/2 Bsp M	1/2 Bsp M	Nipple	14	0,49	10	
13.0003.37	1/2 Bsp M	1/4 Bsp M	Nipple	25	0,9	10	



SUCTION STRAINER FOR TANK

P/N	Couplings	Weight			
		gr	oz		
28.0055.00	3/8 Bsp M+O-ring	70	2,4	25	
28.2027.23	1/2 Bsp F	33	1,16	25	✓
28.0080.23	3/8 Bsp M	70	2,4	25	
26.0373.21	M 18 x 1 M	70	2,4	25	

Filtration parameter	46 mesh	300 µm
Material	Brass + Sst net	





Inlet water tank - Float valve

RGP - PLASTIC FLOAT VALVE

P/N	Inlet	Weight			
		gr	oz		
29.0150.00	3/4 Bsp M	78	2,75	25	✓
Rated Pressure		10 bar - 1 MPa			145 psi
Rated Temperature		60 °C			140 °F
Flow: @1 bar > 28,5 Lpm -14psi >7,5 USGpm- @2 bar > 30 Lpm -28psi > 8 USGpm					



RG 30 - PLASTIC FLOAT VALVE

P/N	Inlet	Weight			
		gr	oz		
29.0220.00	3/8 Bsp M	100	3,53	25	✓
29.0220.20	1/2 Bsp M	102	3,6	25	✓
29.0220.70	3/4 Bsp M	108	3,81	25	✓
Rated Pressure		10 bar - 1 MPa			145 psi
Rated Temperature		60 °C			140 °F
Flow: @1 bar > 28 Lpm-14psi >7,4USGpm- @2 bar > 40 Lpm-29psi >10,5USGpm					



RGO - BRASS FLOAT VALVE

P/N	Inlet	Weight			
		gr	oz		
29.0160.00	3/8 Bsp M	284	10,02	25	✓
29.0160.80	3/8 Bsp M	250	8,82	25	
Short floater arm					
29.0160.90	3/8 Bsp M	267	9,42	40	
Float retainer with external screw - old PA type					
29.0160.10	1/2 Bsp M	306	10,8	25	✓
29.0160.30	1/2 Bsp F	311	10,97	25	✓
29.0160.20	3/4 Bsp M	363	12,8	25	✓
29.0160.94	3/4 Bsp M	325	11,46	40	✓
Float with external screw -PA old type -Without nut or washer					
Rated Pressure		10 bar - 1 MPa			145 psi
Rated Temperature		60 °C			140 °F
Flow: @1 bar> 20 Lpm-14psi >5,3USGpm- @2 bar> 29 Lpm-28psi > 7,5USGpm					



RGO - BRASS FLOAT VALVE + 17MM HOSE BARB + STRAINER

P/N	Hose barb		Weight			
	mm	in	gr	oz		
29.0160.35	17	0,67	404	14,25	25	✓
Rated Pressure		10 bar - 1 MPa				145 psi
Rated Temperature		60 °C				140 °F
Flow: @1 bar> 20 Lpm -14psi >5,3USGpm- @2 bar> 29 Lpm -28psi > 7,5USGpm						



RG60 - BRASS FLOAT VALVE

P/N	Inlet	Weight		 	
		gr	oz		
29.0280.00	1/2 Bsp M	392	13,83	25	✓
29.0280.20	3/4 Bsp M	443	15,63	25	✓

Rated Pressure 6 bar - 0,6 MPa 87 psi
 Rated Temperature 60 °C 140 °F

Flow: @1 bar > 42 Lpm-14psi >11,1USGpm-@2 bar> 60 Lpm-29psi > 16USGpm





BALL QUICK COUPLING FOR WATER SUCTION Ø22 MM

P/N	Inlet	Type	Weight			
			gr	oz		
28.0250.00	1/2 Bsp M	B	157	5,54	25	✓
28.0250.30	3/4 Bsp M	B	177	6,24	25	✓
28.0250.40	3/4 Bsp F	B	162	5,71	25	✓
28.0255.31	17-19mm hose barb	A	66	2,33	25	✓

Rated Pressure 10 bar - 1 MPa 145 psi
 Rated Flow 24 l/min 6,3 USGpm
 Rated Temperature 90 °C 195 °F

Pin Ø22 mm



SCREW QUICK COUPLING FOR WATER SUCTION

P/N	Inlet	Outlet	Weight			
			gr	oz		
28.0030.00	1/2 Bsp M	1/2 Bsp M	105	3,7	5	

Rated Pressure 10 bar - 1 MPa 145 psi
 Rated Flow 80 l/min 21 USGpm
 Rated Temperature 90 °C 195 °F

3/4 Bsp nut



STRAINER + HOSE BARB

P/N	Inlet	Hose barb		Weight			
		mm	in	gr	oz		
28.0035.00	3/8 Bsp M	17	0,7	82	2,89	10	✓
28.0040.00	1/2 Bsp M	17	0,7	82	2,89	10	✓
28.0047.00	3/8 Bsp M	19	0,74	86	3	10	✓
28.0042.00	1/2 Bsp M	19	0,74	92	3,24	10	✓

Rated Pressure 8 bar - 0,8 MPa 115 psi
 Rated Flow 20 l/min 5,2 USGpm
 Rated Temperature 60 °C 140 °F

3/4 Bsp nut



PLASTIC CHEMICAL STRAINER

P/N	1 - Hose barb		2 - Hose barb		Mat.	Weight				
	mm	in	mm	in		gr	oz			
28.1010.00	6	0,24	8	0,32	PP+ brass	20	0,7	50	✓	
28.1010.30	6	0,24	8	0,32	PP+ Sst.	18	0,63	10	✓	
Rated Temper.		40 °C		104 °F						
Filtration parameter		51 mesh		355 µm						



PLASTIC CHEMICAL STRAINER WITH CHECK VALVE

P/N	1 - Hose barb		2 - Hose barb		Mat.	Weight				
	mm	in	mm	in		gr	oz			
28.1000.00	6	0,24	8	0,32	PP+ brass	22	0,77	50	✓	
28.1000.30	6	0,24	8	0,32	PP+ Sst.	20	0,71	10	✓	
Rated Temper.		40 °C		104 °F						
Filtration parameter		51 mesh		355 µm						



FSR- PLASTIC CHEMICAL STRAINER WITHOUT MESH

P/N	1 - Hose barb		2 - Hose barb		Mat.	Weight				
	mm	in	mm	in		gr	oz			
28.1045.00	6	0,24	8	0,31	PP+ brass	21	0,74	25	✓	
Rated Flow		1,5 l/min		0,4 USGpm						
Rated Temper.		40 °C		104 °F						
Filtration parameter		51 mesh		355 µm						



FSR- PLASTIC CHEMICAL STRAINER WITH CHECK VALVE

P/N	1 - Hose barb		Hose barb		Mat.	Weight				
	mm	in	mm	in		gr	oz			
28.1035.00	6	0,24	8	0,32	PP+ brass	22	0,77	25	✓	
Rated Flow		1,5 l/min		0,4 USGpm						
Rated Temper.		40 °C		104 °F						
Filtration parameter		51 mesh		355 µm						



CHEMICAL STRAINER WITH STAINLESS STEEL NET

NEW

P/N	Hose barb		Mat.	Type	Weight			
	mm	in			gr	oz		
29.0915.00	7	0,27	Sst.+ brass	B	18	0,6	25	✓
28.1018.00	8	0,31	Sst. Ai 304 L	A	11	0,4	5	✓
28.1018.60	8	0,31	Sst Ai 316L	A	11	0,4	5	
Filtration parameter		46 mesh		300 µm				





SST SUCTION CHEMICAL STRAINER

P/N	Hose barb		Mat.	Type	Weight			
	mm	in			gr	oz		
28.1015.00	7	0,27	Sst. Ai 304 L	A	5	0,2	5	✓
28.1015.60	7	0,27	Sst Ai 316L	B	5	0,2	5	

Filtration parameter

35 mesh

500 µm



SST STRAINER WITH CHECK VALVE

P/N	Hose barb		Mat.	Weight			
	mm	in		gr	oz		
28.0050.00	7	0,27	Sst.+ brass	40	1,41	25	✓

Filtration parameter

46 mesh

300 µm



F5 - PLASTIC SUCTION STRAINER

P/N	Inlet	Outlet	Weight			
			gr	oz		
28.0300.00	1/2 Bsp F	1/2 Bspt M	172	6,07	20	✓
28.0300.20	1/2 Bsp F	1/2 Bsp F	140	4,94	20	✓
Rated Pressure			10 bar - 1 MPa		145 psi	
Rated Flow			(Dp 0.25 bar) 30 l/min		8 USGpm	
Rated Temperature			40 °C		105 °F	
Filtration parameter			50 mesh		300 µm	



F5 B- PLASTIC STRAINER WITH BYPASS

P/N	Inlet	Outlet	Weight			
			gr	oz		
28.0350.00	1/2 Bsp F	1/2 Bspt M	184	6,5	20	✓
28.0350.20	1/2 Bsp F	1/2 Bsp F	145	5,11	20	✓
Rated Pressure			10 bar - 1 MPa		145 psi	
Rated Flow			(Dp 0.25 bar) 30 l/min		8 USGpm	
Rated Temperature			40 °C		105 °F	
Bypass					1/4 Bsp F	
Filtration parameter			50 mesh		300 µm	



F5 BN - REINFORCED PLASTIC STRAINER WITH BYPASS

P/N	Mat.	Weight			
		gr	oz		
28.0360.00	Pa66 reinf.	208	7,34	20	✓
Rated Pressure		10 bar - 1 MPa		145 psi	
Rated Flow		(Dp 0.25 bar) 30 l/min		8 USGpm	
Rated Temperature		60 °C		140 °F	
Inlet				1/2 Bsp F	
Outlet				1/2 Bspt M	
Bypass				1/4 Bsp F + Plug	
Filtration parameter		50 mesh		300 µm	



F5 L - PLASTIC SUCTION STRAINER

P/N	Inlet	Outlet	Filtration standard		Weight			
			mesh	µm	gr	oz		
28.0320.00	1/2 Bsp F	1/2 Bspt M	46	300	198	6,98	20	✓
28.0320.15	1/2 Bsp F	1/2 Bspt M	100	150	195	6,88	20	
28.0320.50	1/2 Bsp F	1/2 Bspt M	300	50	164	5,78	20	
28.0320.20	1/2 Bsp F	1/2 Bsp F	46	300	164	5,78	20	✓
28.0320.65	1/2 Bsp F	1/2 Bsp F	100	150	164	5,78	20	✓
28.0320.85	1/2 Bsp F	1/2 Bsp F	300	50	166	5,85	20	
Rated Pressure			10 bar - 1 MPa		145 psi			
Rated Flow			(Dp 0.25 bar) 30 l/min		8 USGpm			
Rated Temperature			40 °C		105 °F			



F5 L B- PLASTIC STRAINER WITH BYPASS

P/N	Inlet	Outlet	Weight			
			gr	oz		
28.0370.00	1/2 Bsp F	1/2 Bspt M	165	5,8	20	✓
Rated Pressure			10 bar - 1 MPa		145 psi	
Rated Flow			(Dp 0.25 bar) 30 l/min		8 USGpm	
Rated Temperature			40 °C		105 °F	
Bypass					1/4 Bsp F	
Filtration parameter			46 mesh		300 µm	





FPL - PLASTIC STRAINER 3/4 BSP MF

P/N	Inlet	Outlet	Filtration standard		Col.	Weight			
			mesh	µm		gr	oz		
28.0130.00	3/4 Bsp M	3/4 Bsp F	125	120	Gray	110	3,88	40	✓
28.0131.22	-	--	125	120	Gray	10	0,35	12	
28.0136.00	3/4 Bsp M	3/4 Bsp F	63	60	White	108	3,81	40	✓
28.0137.22	-	--	63	60	White	10	0,35	12	

Rated Pressure 10 bar - 1 MPa 145 psi
 Rated Flow 80 l/min 21 USGpm
 Rated Temperature 40 °C 140 °F
 Mat. PP + SAN
 Seals material NBR



F 8 - PLASTIC SUCTION STRAINER

P/N	Inlet	Outlet	Filtration standard		Weight			
			mesh	µm	gr	oz		
28.0380.00	1/2 Bsp F	1/2 Bsp F	46	300	121,5	4,29	20	
28.0380.15	1/2 Bsp F	1/2 Bsp F	100	150	121,5	4,29	20	✓
28.0380.50	1/2 Bsp F	1/2 Bsp F	300	50	122	4,3	20	✓
28.0390.00	3/4 Bsp F	3/4 Bsp F	46	300	128	4,51	20	✓
28.0390.15	3/4 Bsp F	3/4 Bsp F	100	150	126	4,44	20	✓

Rated Pressure 10 bar - 1 MPa 145 psi
 Rated Flow (Dp 0.25 bar) 30 l/min 8 USGpm
 Rated Temperature 40 °C 105 °F



FA 1 ALUMINIUM STRAINER WITH BYPASS

P/N	Inlet	Outlet	Filtration standard		Weight			
			mesh	µm	gr	oz		
28.0010.00	1/2 Bsp F	1/2 Bsp M	38	400	217	7,65	20	✓
28.0010.20	1/2 Bsp F	1/2 Bsp M	86	850	220	7,7	20	✓
28.0010.50	1/2 Bsp F	1/2 Bsp M	38	400	217	7,65	20	✓
Black coated								
28.0010.70	1/2 Bsp F	1/2 Bsp M	86	850	220	7,7	20	✓
Black coated								

Rated Pressure 40 bar - 4 MPa 580 psi
 Rated Flow 25 l/min 6,5 USGpm
 Rated Temperature 90 °C 195 °F
 Bypass 1/4 Bsp F
 Material Aluminium + Sst. net



FY5 - PLASTIC STRAINER "Y"

P/N	Inlet	Outlet	Weight			
			gr	oz		
15.0004.12	3/4 Bsp F	3/4 Bsp F	202	7,12	5	✓
15.0004.02	1 Bsp F	1" Bsp F	180	6,35	5	✓

Rated Pressure 10 bar - 1 MPa 145 psi
 Rated Flow 80 l/min 21 USGpm
 Rated Temperature 40 °C 140 °F
 Filtration parameter 50 mesh 300 µm
 Material PP + FG



FYO - BRASS Y-STRAINER

P/N	Couplings	Length		Height		Weight			
		mm	in.	mm	in	gr	oz		
28.0160.00	3/8 Bsp F	56	2,2	39,5	1,55	139	4,9	5	✓
28.0162.00	1/2 Bsp F	59	2,3	40	1,57	158	5,57	5	✓
28.0164.00	3/4 Bsp F	70	2,75	48,5	1,91	247	8,71	5	✓
28.0162.50	1/2 Npt F	59	2,3	40	1,57	154	5,43	5	✓

Rated Pressure 12 bar - 1,2 MPa 175 psi
 Rated Temperature 90 °C 195 °F
 Material Brass + Sst net
 Filtration parameter 45 mesh 400 µm



SUCTION NET STRAINER WITH HOSE BARB

P/N	Rated Flow		Hose barb		Weight			
	l/min	USGpm	mm	in	gr	oz		
15.0000.02	30	8	20	0,78	32	1,13	5	✓
15.0000.01	55	14,5	25	1,0	36	1,27	5	

Rated Pressure 6 bar - 0,6 MPa 85 psi
 Rated Temperature 40 °C 104 °F
 Material PPL +FG
 Filtration parameter 30 mesh 600 µm



SUCTION NET STRAINER WITH THREADED BARB

P/N	Rated Flow		Outlet	Weight			
	l/min	USGpm		gr	oz		
15.0000.05	55	14,5	1" Bsp F	40	1,41	5	

Rated Pressure 6 bar - 0,6 MPa 85 psi
 Rated Temperature 40 °C 104 °F
 Material PPL +FG
 Filtration parameter 30 mesh 600 µm



SUCTION STRAINER WITH HOSE BARB AND CHECK VALVE

P/N	Hose barb		Type	Weight			
	mm	in		gr	oz		
28.0060.00	19	0,75	Check valve	40	1,41	10	✓
28.0062.00	19	0,75	-	24	0,85	10	

Without check valve

Rated Pressure 0,6 bar - 0,06 MPa 9 psi
 Rated Temperature 40 °C 104 °F
 Material PPL





SP9 - CAR WASH BRUSH

P/N	Inlet	Bristle Length		Weight			
		mm	in	gr	oz		
29.0545.00	1/4 Bsp F	97	3,8	782	27,58	5	✓
29.0540.00	1/2 Npt F	97	3,8	782	27,58	5	✓
29.0542.21	-	97	3,8	465	16,4	3	

Spare part - Holder w/ black black synthetic bristles

Rated Pressure 5 bar - 0,5 MPa 72,5 psi
 Rated Temperature 60 °C 140 °F
 Bristle Material Soft Synthetic



SR8 ROTATING BRUSH

P/N	Hair material	Nozzle	Weight			
		mm	gr	oz		
29.0500.00	White Nylon	3	916	32,31	1	✓

Rated Pressure 30 bar - 3 MPa 435 psi
 Rated Flow 30 l/min 8 USGpm
 Rated Temperature 60 °C 140 °F
 Inlet 1/4 Bsp M



VB 80A/150 - ATEX--AI 303-


P/N	Rated pr.		Permiss.press.		Couplings	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.0448.15	150 - 15	2200	170 - 17	2450	1/2 Bsp F	1226	43,24	1	
Rated Flow		80 l/min		21 USGpm					
Rated Temperature		70 °C		160 °F					
Material		Stainless steel 303							


VB 200/150-VB200/70
NEW

P/N	Rated pr.		Permiss.press.		Couplings	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.5000.15	150 - 15	2200	170 - 17	2450	1" Bsp F	2025	71,7	1	✓
60.5000.00	150 - 15	2200	170 - 17	2450	1" Npt F	2046	72,16	1	✓
60.5020.15	150 - 15	2200	170 - 17	2450	1" Bsp F	2060	73,5	1	✓
With hand wheel									
60.5020.00	150 - 15	2200	170 - 17	2450	1" Npt F	2114	74,56	1	✓
With handwheel									
60.5000.10	150 - 15	2200	170 - 17	2450	1" Bsp F	2025	71,7	1	✓
Viton O-Rings									
60.5025.15	70 - 7	1000	80 - 8	1150	1" Bsp F	2085	73,54	1	✓
60.5025.00	70 - 7	1000	80 - 8	1150	1" Npt F	2017	71,14	1	
Rated Flow			200 l/min		53 USGpm				
Rated Temperature			90 °C		195 °F				


VB 140/160

P/N	Rated pr.		Permiss.press.		Couplings	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.4800.00	160 - 16	2300	180 - 18	2600	3/4 Bsp F	1802	63,56	1	✓
60.4800.50	160 - 16	2300	180 - 18	2600	3/4 Npt F	1802	63,56	1	
Rated Flow			140 l/min		37 USGpm				
Rated Temperature			90 °C		195 °F				


VB 130 UNLOADER VALVE

P/N	Rated pr.		Permiss.press.		Couplings	Bypass	Weight			
	bar - MPa	psi	bar - MPa	psi			gr	oz		
60.0300.50	70 - 7	1015	80 - 8	1150	3/8 Bsp MM	3/8 Bsp F	382	13,47	40	✓
60.0300.55	70 - 7	1015	80 - 8	1150	3/8 Npt MM	3/8 Npt F	386	13,61	40	
60.0300.00	160 - 16	2300	180 - 18	2600	3/8 Bsp MM	3/8 Bsp F	388	13,68	40	✓
60.0300.05	160 - 16	2300	180 - 18	2600	3/8 Npt MM	3/8 Npt F	390	13,9	40	✓
Rated Flow			25 l/min		6,5 USGpm					
Rated Temperature			90 °C		195 °F					
On request - plastic knob 60.0315.84										

On request - plastic knob 60.0315.84





VB 130 - WITH INJECTOR

P/N	Injector	Nozzle mm	Outlet	Weight		
				gr	oz	
60.0320.18	Adjustable	1,8	3/8 Bsp M	520	18,34	30
60.0321.21	Fixed	2,1	3/8 Bsp M	499	17,6	30

Rated Pressure	160 bar - 16 MPa	2300 psi
Permissible Pressure	180 bar - 18 MPa	2600 psi
Rated Flow	25 l/min	6,5 USGpm
Rated Temperature	90 °C	195 °F



VB 135 - BANJO CONNECTION - HOLLOW SCREW FITTING

P/N	Dist.betw.ports	Couplings	Pump type	Weight		
				gr	oz	
60.0380.25	X:0 Y:62	1/4 × 3/8 Bsp	IP serie 51	622	21,94	5 ✓
60.0800.00	X:5 Y:53	3/8 × 1/2 Bsp	AR XT-HPE	652	23	24 ✓
60.0812.00	X:5 Y:57	3/8 × 1/2 Bsp	AR XM	662	23,35	20
60.0820.00	X:0 Y:56	3/8 × 3/8 Bsp	Speck NP10	613	21,62	25
60.0825.00	X:0 Y:63	3/8 × 3/8 Bsp	Udor SF	620	21,9	20

Rated Pressure	160 bar - 16 MPa	2300 psi
Permissible Pressure	180 bar - 18 MPa	2600 psi
Rated Flow	25 l/min	6,5 USGpm
Rated Temperature	90 °C	195 °F



VB130-VB3-VB7-VB75 PLASTIC KNOB

P/N	Inlet	Col.	Weight		
			gr	oz	
60.0315.84	Hex.22	Black	14	0,5	10 ✓

Plastic knob



VB20-160-VB30-220 ZERO-ZEROED OUTLET PRESSURE, IN BYPASS

P/N	Permiss.press.		Max. flow rate		Weight		
	bar - MPa	psi	l/min	USGpm	gr	oz	
60.2500.00	160 - 16	2300	20	5,3	662,3	23,4	15
60.2520.00	220 - 22	3200	30	8	662,3	23,4	15

Min.flow rate	8 l/min	2,1 USGpm
Rated Temperature	60 °C	140 °F
Couplings		3/8 Bsp F
Material		Brass

Patent No.: I-1387704/-US-2009-0205716-A1/-EP 2 093 643 A2/-ZL200810131662.7



VB20-160 ZERO WITH MICRO-SWITCH-ZEROED OUTLET PRESSURE, IN BYPASS

P/N	Inlet	Outlet	Bypass	Weight		
				gr	oz	
60.2550.00	3/8 Bsp F	3/8 Bsp F	3/8 Bsp F	772,8	27,2	12


Permissible Pressure	160 bar - 16 MPa	2300 psi
Min.flow rate	8 l/min	2,1 USGpm
Max. flow rate	20 l/min	5,3 USGpm
Rated Temperature	60 °C	140 °F
Max. Curr. Strength		6 (2) A
Max. Voltage		250 V
Material		Brass

Patent No.: I-1387704/-US-2009-0205716-A1/-EP 2 093 643 A2/-ZL200810131662.7



PULSAR RV- VALVE 3/8 BSP F - VITON O-RING **NEW**

P/N	Inlet	Outlet	Bypass	Type	Weight			
					gr	oz		
60.0122.06	2× 3/8 Npt F	3/8 Npt F	2× 3/8 Npt F	A	708	24,97	25	
60.0125.06	2× 3/8 Npt F	3/8 Npt F	2× 3/8 Npt F	B	752	26,52	15	
With knob								
Rated Pressure	160 bar - 16 MPa		2300 psi					
Permissible Pressure	180 bar - 18 MPa		2600 psi					
Rated Flow	40 l/min		10,5 USGpm					
Rated Temperature	90 °C		195 °F					
Seals material	Viton							


VB 450 - 200 - UNLOADER VALVE

P/N	Inlet	Outlet	Bypass	Weight		
				gr	oz	
60.4020.00	1" 1/4 Bsp F	1" 1/4 Bsp F	1" 1/2 Bsp F	6138	216,49	1 ✓
Rated Pressure	200 bar - 20 MPa		2900 psi			
Permissible Pressure	220 bar - 22 MPa		3200 psi			
Rated Flow	450 l/min		120 USGpm			
Rated Temperature	90 °C		195 °F			


VB 3- UNLOADER VALVE

P/N	Inlet	Outlet	Bypass	Weight		
				gr	oz	
60.1900.00	3/8 Bspt M	3/8 Bsp M	3/8 Bsp F	390	13,75	40 ✓
60.1900.05	3/8 Npt M	3/8 Npt M	3/8 Npt F	393	13,86	40 ✓
Rated Pressure	220 bar - 22 MPa		3200 psi			
Permissible Pressure	250 bar - 25 MPa		3650 psi			
Rated Flow	25 l/min		6,5 USGpm			
Rated Temperature	90 °C		195 °F			



On request - plastic knob 60.0315.84

VB 35 - BANJO CONNECTION - HOLLOW SCREW FITTING

P/N	Dist.betw.ports	Couplings	Pump type	Weight			
				gr	oz		
60.0845.00	X:4,5 Y:64	3/8 ×1/2 Bsp	AR RK	696	24,55	24	
60.0850.00	X:19 Y:62-73	3/8 ×1/2 Bsp	IP 44-47-50-60-63 SpeckNP16 Udor M	708	24,97	24	✓
60.0880.00	X:5 Y:53,5	3/8 ×1/2 Bsp	AR XT - HPE - Bertolini TW - KWE	681	24,02	24	✓
60.0860.00	X:19,5 Y:57	3/8 ×1/2 Bsp	IP.E1- E2 - E3	695	24,51	24	✓
Rated Pressure	220 bar - 22 MPa		3200 psi				
Permissible Pressure	250 bar - 25 MPa		3650 psi				
Rated Flow	25 l/min		6,5 USGpm				
Rated Temperature	90 °C		195 °F				
Outlet			3/8 Bsp M				





VB 35 - BANJO CONNECTION- HOLLOW SCREW FITTING- ADJUST.INJECTOR

P/N	Dist.betw.ports	Couplings	Pump type	Nozzle	Weight				
					mm	gr	oz		
60.0855.21	X:19 Y:62-73	3/8 ×1/2 Bsp	IP 50-44-47-60-63	2,1	827	29,17	20		
60.0870.18	X:16 Y:57	3/8 ×1/2 Bsp	Udor	1,8	762	26,88	20		
60.0870.21	X:16 Y:57	3/8 ×1/2 Bsp	Udor	2,1	763	26,91	20		
60.0873.18	X:19,5 Y:57	3/8 ×1/2 Bsp	Udor PN	1,8	816	28,78	20		



Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	25 l/min	6,5 USGpm
Rated Temperature	90 °C	195 °F
Outlet		3/8 Bsp M
Injector		Adjustable

VB 5 - UNLOADER VALVE

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.1300.10	3/8 Bsp M	3/8 Bsp F	3/8 Bsp F	609	21,48	30	✓

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F



VB 56 - BANJO CONNECTION - HOLLOW SCREW FITTING -OUT. 3/8 BSP F F

P/N	Dist.betw.ports	Couplings	Pump type	Weight				
				gr	oz			
60.1350.10	X:19 Y:62-73	3/8 ×1/2 Bsp	IP 44-47-50-60-63 SpeckNP16	952	33,62	20	✓	
60.1372.10	X:26 Y:66-76	3/8 ×1/2 Bsp	Leuco MT-LT	952	33,62	20	✓	

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Outlet		3/8 Bsp F



VB 56 - BANJO CONNECTION - HOLLOW SCREW FITTING -OUT. 3/8 BSP M

P/N	Dist.betw.ports	Couplings	Pump type	Weight				
				gr	oz			
60.1356.10	X:5 Y:53,5	3/8 ×1/2 Bsp	Bertol.TM-WM-TW-KWE	900	31,74	20		
60.1362.10	X:4,5 Y:53-57	3/8 × 3/8 Bsp	Bertol.WJ	900	31,74	20		
60.1350.32	X:19 Y:62-73	3/8 ×1/2 Bsp	IP 50-44-47-60-63	930	32,8	20		

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Outlet		3/8 Bsp M



VB 7 - UNLOADER VALVE **NEW**

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.0700.00	3/8 Bsp M	3/8 Bsp F	3/8 Bsp F	560	19,75	40	✓
60.0700.40	3/8 Bsp M	3/8 Bsp M	3/8 Bsp F	566	19,96	25	✓
60.0700.50	3/8 Npt M	3/8 Npt F	3/8 Npt F	560	19,75	40	

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F

On request - plastic knob 60.0315.84


VB 7 WITH INJECTOR

P/N	Injector	Nozzle	Outlet	Weight			
		mm		gr	oz		
60.0750.21	Adjustable	2,1	3/8 Bsp M	688	24,27	25	
60.0745.21	Fixed	2,1	3/8 Bsp M	670	23,6	30	
60.0746.21	Fixed	2,1	A M22	688	24,26	30	

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	30 l/min	USGpm
Rated Temperature	90 °C	195 °F
Inlet		3/8 Bsp M


VB 75 - BANJO CONNECTION - HOLLOW SCREW FITTING **NEW**

P/N	Dist.betw.ports	Couplings	Pump type	Weight			
				gr	oz		
60.0753.00	X:0 Y:63	3/8 ×1/2 Bsp	Comet LW-ZW	880	31,04	20	
60.0765.00	X:5 Y:56	3/8 ×1/2 Bsp	AR- XM	856	30,19	20	✓
60.0770.00	X:4,5 Y:64	3/8 ×1/2 Bsp	AR-RK Comet FW	868	30,62	20	✓
60.0930.00	X:18 Y:62-73	3/8 ×1/2 Bsp	IP 44-47-50-60-63 SpeckNP16	900	31,7	20	✓
60.0950.00	X:0 Y:62	1/4 × 3/8 Bsp	IP serie 51	837	29,52	20	
60.0768.10	X:4,5 Y:64	3/8 ×1/2 Bsp	AR-RK Comet FW	869	30,65	20	

O-rings Viton

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F

On request - plastic knob 60.0315.84


VB 8

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.1240.00	3/8 Bsp M	3/8 Bsp F	3/8 Bsp F	726	25,61	20	✓

With black plastic knob and panel fitting nut.

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Panel fitting	30 mm	1,18 in





VB 8 WITH MICRO-SWITCH-PR5

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.1280.00	3/8 Bsp M	3/8 Bsp F	3/8 Bsp F	758	26,74	12	✓
60.1290.00	3/8 Bsp M	3/8 Bsp F	3/8 Bsp F	815	28,7	12	✓
With black plastic knob and panel fitting nut.							
60.1290.50	3/8 Npt M	3/8 Npt F	3/8 Npt F	824	29,06	12	
With black plastic knob and panel fitting nut. Sst piston							
Rated Pressure	220 bar - 22 MPa			3200 psi			
Permissible Pressure	250 bar - 25 MPa			3650 psi			
Rated Flow	30 l/min			8 USGpm			
Rated Temperature	90 °C			195 °F			
Max. Curr. Strength				6 (2) A			
Max. Voltage				250 V			



VB 8 WITH MICRO-SWITCH-PR16

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.1296.00	3/8 Bsp M	3/8 Bsp F	3/8 Bsp F	872	30,76	12	
With black plastic knob and panel fitting nut.							
Rated Pressure	220 bar - 22 MPa			3200 psi			
Permissible Pressure	250 bar - 25 MPa			3650 psi			
Rated Flow	30 l/min			8 USGpm			
Rated Temperature	90 °C			195 °F			
Max. Curr. Strength				16 (6) A			
Max. Voltage				250 V			



VB 9

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.2200.00	3/8 Bsp F	3/8 Bsp F	3/8 Bsp F	646	22,78	25	✓
Rated Pressure	220 bar - 22 MPa			3200 psi			
Permissible Pressure	250 bar - 25 MPa			3650 psi			
Rated Flow	30 l/min			8 USGpm			
Rated Temperature	90 °C			195 °F			



VB 9 WITH KNOB AND PANEL FITTING

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.2250.00	3/8 Bsp F	3/8 Bsp F	3/8 Bsp F	770	27,2	25	✓
Rated Pressure	220 bar - 22 MPa			3200 psi			
Permissible Pressure	250 bar - 25 MPa			3650 psi			
Rated Flow	30 l/min			8 USGpm			
Rated Temperature	90 °C			195 °F			



VB 9 WITH KNOB AND MICRO-SWITCH

P/N	Inlet	Outlet	Bypass	Gauge bolt	Weight			
					gr	oz		
60.2350.00	3/8 Bsp F	3/8 Bsp F	3/8 Bsp F	1x 1/4 Bsp F	1022	36,33	12	✓
60.2365.00	3/8 Bsp F	3/8 Bsp F	3/8 Bsp F	2 x 1/4 Bsp F	1036	36,54	12	✓

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Max. Curr. Strength		6 (2) A
Max. Voltage		250 V
Cable length	1000 mm	39,4 in



VB 10 WITH KNOB

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.1100.00	3/8 Bsp F	3/8 Bsp F	3/8 Bsp F	1100	38,8	12	✓
60.1100.50	3/8 Npt F	3/8 Npt F	3/8 Npt F	1100	38,8	12	✓
60.1150.00	3/8 Bsp F	3/8 Bsp F	3/8 Bsp F	1200	42,3	12	✓

Sst piston

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Residual pressure at close	62 bar - 6,2 MPa	900 psi
Min.bypass re-start	34 bar - 3,4 MPa	500 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F

Patent No.: I 1262632- Usa 5,372,157- J 2749512





PULSAR ZERO WITH KNOB AND MICRO-SWITCH -ZEROED OUTLET PRESSURE, IN BYPASS

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.2450.00	3/8 Bsp F	3/8 Bsp F	2× 3/8Bsp F	1228	43,31	12	✓
60.2450.50	3/8 Npt F	3/8 Npt F	2× 3/8 Npt F	1250	44,09	12	

Permissible Pressure	280 bar - 28 MPa	4050 psi
Max. flow rate	40 l/min	10,5 USGpm
Min. flow rate	9 l/min	2,4 USGpm
Rated Temperature	60 °C	140 °F
Max. Temper.	90 °C	195 °F
Max. Curr. Strength		6 (2) A
Max. Voltage		250 V

Patent No.: I-1387704/-US-2009-0205716-A1/-EP 2 093 643 A2/-ZL200810131662.7



VB80/280 ZERO - VALVE WITH ZEROED OUTLET PRESSURE, IN BYPASS

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.2800.00	1/2 Bsp F	1/2 Bsp F	1/2 Bsp F	1710	60,31	4	✓

Permissible Pressure	280 bar - 28 MPa	4050 psi
Min. flow rate	20 l/min	5,3 USGpm
Max. flow rate	80 l/min	21 USGpm
Rated Temperature	60 °C	140 °F
Max. Temper.	90 °C	195 °F
Material		Brass

Patent No.: I-1387704/-US-2009-0205716-A1/-EP 2 093 643 A2/-ZL200810131662.7



VB80/280 ZERO WITH KNOB AND MICRO-SWITCH - VALVE WITH ZEROED OUTLET PRESSURE, IN BYPASS

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.2850.00	1/2 Bsp F	1/2 Bsp F	1/2 Bsp F	1825,2	64,4	1	

Permissible Pressure	280 bar - 28 MPa	4050 psi
Max. flow rate	80 l/min	21 USGpm
Min. flow rate	20 l/min	5,3 USGpm
Rated Temperature	60 °C	140 °F
Max. Temper.	90 °C	195 °F
Max. Curr. Strength		6 (2) A
Max. Voltage		250 V

Patent No.: I-1387704/-US-2009-0205716-A1/-EP 2 093 643 A2/-ZL200810131662.7



PULSAR RV - UNLOADER VALVE

P/N	Rated pr.		Permiss.press.		Type	Outlet	Weight			
	bar - MPa	psi	bar - MPa	psi			gr	oz		
60.0000.00	160 - 16	2300	180 - 18	2600	B	3/8 Bsp F	711	25,08	20	✓
60.0000.05	160 - 16	2300	180 - 18	2600	B	3/8 Npt F	712	25,11	25	✓
60.0000.60	280 - 28	4050	310 - 31	4500	A	3/8 Bsp F	744	26,24	20	✓
60.0000.63	280 - 28	4050	310 - 31	4500	A	3/8 Bsp F	744	26,24	25	
Shutter pin, Sst.										
60.0000.65	280 - 28	4050	310 - 31	4500	A	3/8 Npt F	744	26,24	25	✓

Rated Flow	40 l/min	10 USGpm
Rated Temperature	90 °C	195 °F
Material		Brass

Valves with 2 ports each for inlet and bypass : 3/8 Bsp F and/or 3/8Npt F



PULSAR RV - UNLOADER VALVE -NICKEL-PLATED BRASS

P/N	Rated pr.		Permiss.press.		Type	Outlet	Weight			
	bar - MPa	psi	bar - MPa	psi			gr	oz		
60.0000.62	280 - 28	4050	310 - 31	4500	A	3/8 Bsp F	744	26,24	25	
Rated Flow			40 l/min				10 USGpm			
Rated Temperature			90 °C				195 °F			
Material			Nickel plated brass							


Valves with 2 ports each for inlet and bypass : 3/8 Bsp F and/or 3/8Npt F



PULSAR RV - BYPASS VALVE WITH KNOB

P/N	Rated pr.		Permiss.press.		Type	Outlet	Weight		
	bar - MPa	psi	bar - MPa	psi			gr	oz	
60.0007.00	160 - 16	2300	180 - 18	2600	B	3/8 Bsp F	780	27,51	15 ✓
60.0007.05	160 - 16	2300	180 - 18	2600	B	3/8 Npt F	780	27,51	15 ✓
60.0007.60	280 - 28	4050	310 - 31	4500	A	3/8 Bsp F	780	27,51	15 ✓
60.0007.63	280 - 28	4050	310 - 31	4500	A	3/8 Bsp M	777	27,4	15 ✓
60.0007.65	280 - 28	4050	310 - 31	4500	A	3/8 Npt F	780	27,51	15 ✓
Rated Flow			40 l/min				10 USGpm		
Rated Temperature			90 °C				195 °F		

Valves with 2 ports each for inlet and bypass : 3/8 Bsp F and/or 3/8Npt F



PULSAR RV + 1/4 BSP F GAUGE PORT

P/N	Rated pr.		Permiss.press.		Weight		 	
	bar - MPa	psi	bar - MPa	psi	gr	oz		
60.0045.60	280 - 28	4050	310 - 31	4500	764	26,95	25	✓
Rated Flow			40 l/min	10 USGpm				
Rated Temperature			90 °C	195 °F				
Inlet			2× 3/8 Bsp F					
Outlet			3/8 Bsp F					
Bypass			2× 3/8Bsp F					
Gauge port			1x 1/4 Bsp F					

With 1/4 Bsp F gauge port



PULSAR RV WITH KNOB/ GAUGE PORT

P/N	Rated pr.		Permiss.press.		Outlet	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.0016.00	160 - 16	2300	180 - 18	2600	3/8 Bsp F	781	27,55	15	✓
60.0016.60	280 - 28	4050	310 - 31	4500	3/8 Bsp F	803	28,32	15	✓
Gauge port									
Rated Flow		40 l/min		10,5 USGpm					
Rated Temperature		90 °C		195 °F					
Gauge port		1x 1/4 Bsp F							

Valves with 2 ports each for inlet and bypass : 3/8 Bsp F and/or 3/8Npt F - Suitable for recycled water and strong detergents.





PULSAR RV WITH MICRO-SWITCH/ KNOB

P/N	Rated pr.		Permiss.press.		Couplings	Gauge bolt	Type	Weight		 
	bar - MPa	psi	bar - MPa	psi				gr	oz	
60.0006.00	160 - 16	2300	180 - 18	2600	3/8 Bsp FF	-	A	916	32,31	15
60.0006.05	160 - 16	2300	180 - 18	2600	3/8 Npt F	-	A	890	31,39	15
60.0006.60	280 - 28	4050	310 - 31	4500	3/8 Bsp FF	-	B	919	32,41	15
60.0006.65	280 - 28	4050	310 - 31	4500	3/8 Npt F	-	B	920	32,45	10
60.0013.60	280 - 28	4050	310 - 31	4500	3/8 Bsp FF	1x 1/4 Bsp F	C	916	32,31	10

Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 90 °C 195 °F
 Max. Curr. Strength 16 (6) A
 Max. Voltage 250 V



Suitable for recycled water and strong detergents.

PULSAR RV WITH MICRO-SWITCH

P/N	Rated pr.		Permiss.press.		Couplings	Weight		 
	bar - MPa	psi	bar - MPa	psi		gr	oz	
60.0023.60	280 - 28	4050	310 - 31	4500	3/8 Bsp FF	880	31,04	10
60.0023.65	280 - 28	4050	310 - 31	4500	3/8 Npt F	884	31,18	10

Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 90 °C 195 °F
 Max. Curr. Strength 16 (6) A
 Max. Voltage 250 V



PULSAR RV - UNLOA.VAL. WITH EASY STARTER AND KNOB

P/N	Couplings	Weight		 
		gr	oz	
60.0008.76	3/8 Bsp F	750	26,45	15
Installation in vertical position.				
60.0007.86	3/8 Npt F	741	26,14	15
Installation in vertical position.				

Rated Pressure 280 bar - 28 MPa 4050 psi
 Permissible Pressure 310 bar - 31 MPa 4500 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 90 °C 195 °F



VB 280 WITH KNOB

P/N	Inlet	Outlet	Bypass	Weight		 
				gr	oz	
60.1600.00	3/8 Bsp M	3/8 Bsp F	1/2 Bsp F	886	31,25	5

Rated Pressure 280 bar - 28 MPa 4050 psi
 Permissible Pressure 310 bar - 31 MPa 4500 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 90 °C 195 °F




VB 285 WITH KNOB - BANJO CONNECTION - HOLLOW SCREW FITTING

P/N	Dist.betw.ports	Couplings	Pump type	Weight			
				gr	oz		
60.0960.00	X:18 Y:63	3/8 ×1/2 Bsp	IP serie 44- Udor MK	1248	44,02	10	✓
Rated Pressure	280 bar - 28 MPa		4050 psi				
Permissible Pressure	310 bar - 31 MPa		4500 psi				
Rated Flow	30 l/min		8 USGpm				
Rated Temperature	90 °C		195 °F				
Outlet	3/8 Bsp F						



VB 85/180 - VB 85/310 - UNLOADER VALVE

P/N	Rated pr.		Permiss.press.		Couplings	Type	Weight			
	bar - MPa	psi	bar - MPa	psi			gr	oz		
60.0485.00	160 - 16	2300	180 - 18	2600	1/2 Bsp F	B	1120	39,5	4	
Rated Flow	80 l/min		21 USGpm							
Rated Temperature	90 °C		195 °F							


VB 85/180 - VB 85/310 WITH GAUGE PORT


P/N	Rated pr.		Permiss.press.		Couplings	Type	Weight			
	bar - MPa	psi	bar - MPa	psi			gr	oz		
60.0423.04	160 - 16	2300	180 - 18	2600	1/2 Bsp F	B	1138	40,14	4	✓
60.0423.64	280 - 28	4050	310 - 31	4500	1/2 Bsp F	A	1170	41,27	4	✓
Rated Flow	80 l/min		21 USGpm							
Rated Temperature	90 °C		195 °F							
Gauge port			1x 1/4 Bsp F							
CE Mark			YES							

With 1/4 Bsp F gauge port


VB 85 R/180 - VB 85 R/310 --UNLOADER VALVE

P/N	Rated pr.		Permiss.press.		Couplings	Type	Weight			
	bar - MPa	psi	bar - MPa	psi			gr	oz		
60.0423.00	160 - 16	2300	180 - 18	2600	1/2 Bsp F	B	1122	39,57	4	✓
60.0423.05	160 - 16	2300	180 - 18	2600	1/2 Npt F	B	1122	39,57	4	✓
60.0423.60	280 - 28	4050	310 - 31	4500	1/2 Bsp F	A	1152	40,63	4	✓
60.0423.65	280 - 28	4050	310 - 31	4500	1/2 Npt F	A	1152	40,63	4	✓
Rated Flow	80 l/min		21 USGpm							
Rated Temperature	90 °C		195 °F							

Suitable for recycled water and strong detergents.






VB 85 RV/180 - VB 85 RV/310-UNLOADER VALV. WITH KNOB

P/N	Type	Rated pr.		Permiss.press.		Couplings	Weight			
		bar - MPa	psi	bar - MPa	psi		gr	oz		
60.0427.00	B	160 - 16	2300	180 - 18	2600	1/2 Bsp F	1164	41	4	✓
60.0427.05	B	160 - 16	2300	180 - 18	2600	1/2 Npt F	1142	40,28	4	
60.0427.60	A	280 - 28	4050	310 - 31	4500	1/2 Bsp F	1190	41,97	4	✓
60.0427.65	A	280 - 28	4050	310 - 31	4500	1/2 Npt F	1169	41,23	4	✓

Rated Flow 80 l/min 21 USGpm
 Rated Temperature 90 °C 195 °F



VB85 RV/310 UNLOA.VAL. WITH MICRO-SWITCH

P/N	Rated pr.		Permiss.press.		Couplings	Type	Weight			
	bar - MPa	psi	bar - MPa	psi			gr	oz		
60.0484.65	280 - 28	4050	310 - 31	4500	1/2 Npt F	A	1154	40,7	12	

Rated Flow 80 l/min 21 USGpm
 Rated Temperature 90 °C 195 °F
 Max. Curr. Strength 16 (6) A
 Max. Voltage 250 V



VB33 - UNLOADER VALVE

P/N	Rated pr.		Permiss.press.		Couplings	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.1850.00	280 - 28	4050	310 - 31	4500	1/2 Bsp F	1058	37,32	4	✓
60.1850.50	280 - 28	4050	310 - 31	4500	1/2 Npt F	1088	38,37	4	✓

Rated Flow 80 l/min 21 USGpm
 Rated Temperature 90 °C 195 °F
 Material Brass



VB-HT 33 - UNLOADER VALVE FOR HOT TEMPERATURE WATER

P/N	Rated pr.		Permiss.press.		Couplings	Type	Weight			
	bar - MPa	psi	bar - MPa	psi			gr	oz		
60.1820.00	280 - 28	4050	310 - 31	4500	1/2 Bsp F	A	1085	38,27	2	✓
60.1820.50	280 - 28	4050	310 - 31	4500	1/2 Npt F	A	1085	38,27	2	✓

Rated Flow 80 l/min 21 USGpm
 Rated Temperature 90 °C 195 °F
 Max. Temper. 85 °C 185 °F
 Material Brass



VB 200/280 - UNLOADER VALVE

P/N	Couplings	Weight			
		gr	oz		
60.4300.00	1" Bsp F	3482	122,81	1	✓
Rated Pressure	280 bar - 28 MPa				4050 psi
Permissible Pressure	310 bar - 31 MPa				4500 psi
Rated Flow	200 l/min				53 USGpm
Rated Temperature	90 °C				195 °F
Material					Brass




VB 450 - 300 - UNLOADER VALVE

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.4030.00	1" 1/4 Bsp F	1" 1/4 Bsp F	1" 1/2 Bsp F	6141	216,6	1	✓
Rated Pressure	300 bar - 30 MPa		4350 psi				
Permissible Pressure	330 bar - 33 MPa		4800 psi				
Rated Flow	450 l/min		120 USGpm				
Rated Temperature	90 °C		195 °F				
Material	Brass						



VB 80 /150-280 - AISI 316 -VITON O-RINGS

P/N	Rated pr.		Permiss.press.		Couplings	Type	Weight			
	bar - MPa	psi	bar - MPa	psi			gr	oz		
60.0450.00	150 - 15	2200	170 - 17	2450	1/2 Bsp F	B	1178	41,55	1	✓
60.0450.05	150 - 15	2200	170 - 17	2450	1/2 Npt F	B	1190	41,97	1	
60.0450.60	280 - 28	4050	310 - 31	4500	1/2 Bsp F	A	1214	42,82	1	✓
Rated Flow			80 l/min		21 USGpm					
Rated Temperature			90 °C		195 °F					
Material				Stainless steel Ai316						
Seals material				Viton						

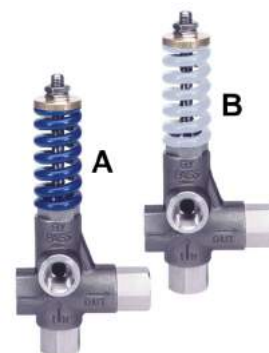

VB 80A/280 - AISI 303 ATEX



P/N	Rated pr.		Permiss.press.		Couplings	Weight		 
	bar - MPa	psi	bar - MPa	psi		gr	oz	
60.0448.28	280 - 28	4050	310 - 31	4500	1/2 Bsp F	1275	45,1	1
Rated Flow	80 l/min		21 USGpm					
Rated Temperature	70 °C		158 °F					
Material	Stainless steel 303							






VB 80A/150- 280 ATEX -AISI 316 -VITON O-RINGS

P/N	Rated pr.		Permiss.press.		Couplings	Type	Weight		
	bar - MPa	psi	bar - MPa	psi			gr	oz	
60.0458.15	150 - 15	2200	170 - 17	2450	1/2 Bsp F	B	1178	41,55	1
60.0458.28	280 - 28	4050	310 - 31	4500	1/2 Bsp F	A	1222	43,1	1

Rated Flow 80 l/min 21 USGpm
 Rated Temperature 70 °C 158 °F
 Material Stainless steel Ai316
 Seals material Viton

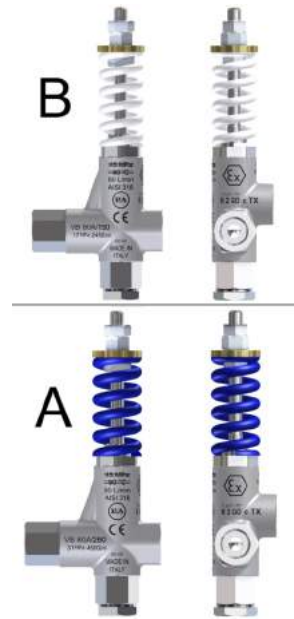

VB 23 - AISI 303 -VITON/EPDM O-RINGS

P/N	Rated pr.		Permiss.press.		Seals material	Weight		
	bar - MPa	psi	bar - MPa	psi		gr	oz	
60.1400.00	280 - 28	4050	310 - 31	4500	Viton	978	34,49	1
60.1420.18	280 - 28	4050	310 - 31	4500	Epdm	860	30,36	1

Rated Flow 80 l/min 21 USGpm
 Rated Temperature 90 °C 195 °F
 Couplings 1/2 Bsp F
 Material Stainless steel 303



VB 26 - AISI 316 -VITON O-RINGS- UNLOADER VALVE

P/N	Rated pr.		Permiss.press.		Couplings	Weight		
	bar - MPa	psi	bar - MPa	psi		gr	oz	
60.1400.60	280 - 28	4050	310 - 31	4500	1/2 Bsp F	853	30,09	1 ✓

Rated Flow 80 l/min 21 USGpm
 Rated Temperature 90 °C 195 °F
 Material Stainless steel Ai316
 Seals material Viton



VB 160/160-280 - UNLOADER VALVE -AISI 303

P/N	Rated pr.		Permiss.press.		Couplings	Weight		
	bar - MPa	psi	bar - MPa	psi		gr	oz	
60.4600.00	160 - 16	2300	180 - 18	2600	3/4 Bsp F	2435	85,9	1
60.4600.05	160 - 16	2300	180 - 18	2600	3/4 Npt F	2435	85,9	1
60.4600.60	280 - 28	4050	310 - 31	4500	3/4 Bsp F	2530	89,2	1
60.4600.65	280 - 28	4050	310 - 31	4500	3/4 Npt F	2530	89,2	1

Rated Flow 160 l/min 42 USGpm
 Rated Temperature 90 °C 195 °F
 Material Stainless steel 303



PULSAR ZERO - VALVE WITH ZEROED OUTLET PRESSURE, IN BYPASS

P/N	Rated pr.		Permiss.press.		Inlet	Outlet	Bypass	Weight			
	bar - MPa	psi	bar - MPa	psi				gr	oz		
60.2400.00	280 - 28	4050	320 - 32	4550	3/8 Bsp F	3/8 Bsp F	2× 3/8Bsp F	1111	39,19	12	✓
60.2400.50	280 - 28	4050	320 - 32	4550	3/8 Npt F	3/8 Npt F	2× 3/8 Npt F	1135	40,04	12	✓
60.2435.00	350 - 35	5100	390 - 39	5650	3/8 Bsp F	3/8 Bsp F	2× 3/8Bsp F	1111	39,19	12	

Min. flow rate 9 l/min 2,4 USGpm
 Max. flow rate 40 l/min 10,5 USGpm
 Rated Temperature 60 °C 140 °F
 Max. Temper. 90 °C 195 °F
 Material Brass

Patent No.: I-1387704/-US-2009-0205716-A1/-EP 2 093 643 A2/-ZL200810131662.7



VB 350 UNLOADER VALVE WITH KNOB **NEW**

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.1700.00	3/8 Bsp M	3/8 Bsp F	1/2 Bsp F	920	32,45	5	✓
60.1700.50	3/8 Npt M	3/8 Npt F	1/2 Bsp F	926	32,66	5	✓

Rated Pressure 350 bar - 35 MPa 5100 psi
 Permissible Pressure 390 bar - 39 MPa 5650 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 90 °C 195 °F
 Material Brass



VB 350 S

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.1750.00	3/8 Bsp M	3/8 Bsp F	1/2 Bsp F	880	31,04	20	✓
60.1800.00	3/8 Bsp M	3/8 Bsp F	1/2 Bsp F	970	34,21	1	✓

With MIN-MAX pressure setting

Rated Pressure 350 bar - 35 MPa 5100 psi
 Permissible Pressure 390 bar - 39 MPa 5650 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 90 °C 195 °F
 Material Brass

Valves with replaceable Stainless steel shutter seat



VB 350 WITH KNOB AND MICROSWITCH **CE**

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.1730.00	3/8 Bsp M	3/8 Bsp F	3/8 Bsp F	1212	42,75	2	✓

Rated Pressure 350 bar - 35 MPa 5100 psi
 Permissible Pressure 390 bar - 39 MPa 5650 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 90 °C 195 °F
 Max. Curr. Strength 6 (2) A
 Max. Voltage 250 V
 Material Brass





VB 36

P/N	Rated pr.		Permiss.press.		Couplings	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.1860.00	350 - 35	5100	390 - 39	5650	1/2 Bsp F	884	31,18	4	✓
60.1860.50	350 - 35	5100	390 - 39	5650	1/2 Npt F	884	31,18	4	

Rated Flow
Rated Temperature
Material

80 l/min
90 °C
21 USGpm
195 °F
Brass



VB-HT 36-39MPa - UNLOADER VALVE FOR HOT TEMPERATURE WATER

P/N	Rated pr.		Permiss.press.		Couplings	Type	Weight			
	bar - MPa	psi	bar - MPa	psi			gr	oz		
60.1870.50	350 - 35	5100	390 - 39	5650	1/2 Npt F	A	1085	38,27	2	

Rated Flow
Rated Temperature
Max. Temper.
Material

80 l/min
90 °C
21 USGpm
195 °F
185 °F
Brass




VB 80/150 - 280 - 400 - AISI 303

P/N	Rated pr.		Permiss.press.		Couplings	Type	CE Mark	Weight			
	bar - MPa	psi	bar - MPa	psi				gr	oz		
60.0430.15	150 - 15	2200	170 - 17	2450	1/2 Bsp F	C	YES	1231	43,42	1	✓
60.0430.40	280 - 28	4050	310 - 31	4500	1/2 Bsp F	B	YES	1258	44,37	1	✓
60.0430.00	400 - 40	5800	450 - 45	6500	1/2 Bsp F	A	NO	1352	47,68	1	✓
60.0430.17	150 - 15	2200	170 - 17	2450	1/2 Npt F	C	YES	1199	42,29	1	
60.0430.45	280 - 28	4050	310 - 31	4500	1/2 Npt F	B	YES	1232	43,45	1	
60.0430.50	400 - 40	5800	450 - 45	6500	1/2 Npt F	A	NO	1330	47	1	✓

Rated Flow
Rated Temperature
Material

80 l/min
90 °C
21 USGpm
195 °F
Stainless steel 303




VB 80/150 - 280 - 400 - AISI 303 -VITON O-RINGS

P/N	Rated pr.		Permiss.press.		Type	CE Mark	Weight			
	bar - MPa	psi	bar - MPa	psi			gr	oz		
60.0455.15	150 - 15	2200	170 - 17	2450	C	YES	1240	43,8	1	
60.0455.60	280 - 28	4050	310 - 31	4500	B	YES	1261	44,48	1	
60.0455.80	400 - 40	5800	450 - 45	6500	A	NO	1360	47,97	1	✓

Couplings
Rated Flow
Rated Temperature
Material
Seals material

80 l/min
90 °C
21 USGpm
195 °F
Stainless steel 303
Viton

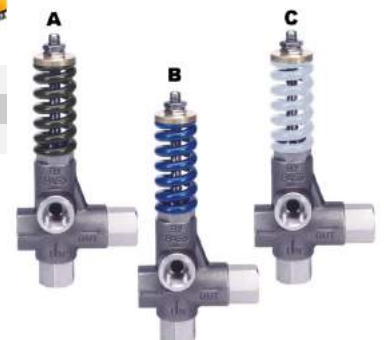


VB 80A/280- 400 ATEX- NORSOK- UNLOADER VAL. DUPLEX SST - VITON O-RINGS


P/N	Rated Pressure		Permissible Pressure		Type	CE Mark	Weight		
	bar - MPa	psi	bar - MPa	psi			gr	oz	
60.4450.28	280 - 28	4050	310 - 31	4500	B	YES	1275	45,1	1
60.4450.40	400 - 40	5800	450 - 45	6500	A	YES	1360	47,97	1



Couplings 1/2 Bsp F
 Rated Flow 80 l/min 21 USGpm
 Rated Temperature 70 °C 158 °F
 Material Stainless steel duplex
 Seals material Viton

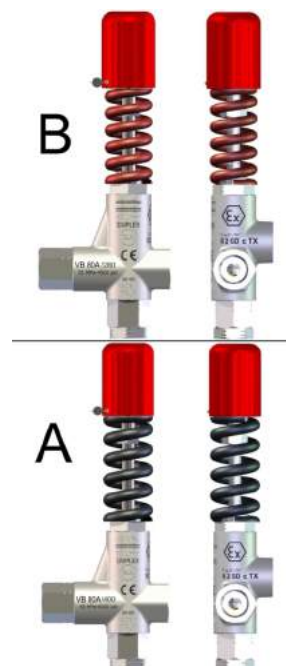
VB 43 - AISI 303

P/N	Rated pr.		Permiss.press.		Couplings	Weight		
	bar - MPa	psi	bar - MPa	psi		gr	oz	
60.1450.00	400 - 40	5800	440 - 44	6400	1/2 Bsp F	974	34,35	1



Rated Flow 80 l/min 21 USGpm
 Rated Temperature 90 °C 195 °F
 Material Stainless steel 303





VB 16

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.8000.00	1/2 Bsp F	1/2 Bsp F	1/2 Bsp F	3608	127,26	1	✓
Rated Pressure		500 bar - 50 MPa		7250 psi			
Permissible Pressure		560 bar - 56 MPa		8100 psi			
Residual pressure at close		190 bar - 19 MPa		2750 psi			
Min.bypass re-start		110 bar - 11 MPa		1600 psi			
Rated Flow		80 l/min		21 USGpm			
Rated Temperature		90 °C		195 °F			
Material				Brass			

Patent No.: I 1262632- Usa 5,372,157- J 2749512



VB 53 - AISI 303

P/N	Rated pr.		Permiss.press.		Couplings	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.1470.00	500 - 50	7250	550 - 55	8000	1/2 Bsp F	1036	36,54	1	✓
Rated Flow			80 l/min		21 USGpm				
Rated Temperature			90 °C		195 °F				
Material			Stainless steel						



VB 250/500 - UNLOADER VALVE AISI 303 **NEW**

P/N	Rated pr.		Permiss.press.		Couplings	Weight		 
	bar - MPa	psi	bar - MPa	psi		gr	oz	
60.4500.00	500 - 50	7250	550 - 55	8000	1" Bsp F	7685	265	1
Rated Flow		250 l/min		66 USGpm				
Rated Temperature		90 °C		195 °F				
Material		Stainless steel						



VB 83 - UNLOADER VALVE AISI 303

P/N	Rated pr.		Permiss.press.		Couplings	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.1630.00	800 - 80	11600	880 - 88	12800	1/2 Bsp F	2500	112,9	1	✓
Rated Flow		60 l/min		15,9 USGpm					
Rated Temperature		90 °C		195 °F					
Material		Stainless steel							



VB60/600-400-250 ZERO - VALVE WITH ZEROED OUTLET PRESSURE, IN BYPASS

P/N	Type	Permiss.press.		Inlet	Outlet	Bypass	Weight			
		bar - MPa	psi				gr	oz		
60.2600.25	C	250 - 25	3600	1/2 Bsp F	1/2 Bsp F	1/2 Bsp F	2090	73,8	1	✓
60.2600.40	B	400 - 40	5800	1/2 Bsp F	1/2 Bsp F	1/2 Bsp F	2125	75	1	✓
60.2600.00	A	600 - 60	8700	1/2 Bsp F	1/2 Bsp F	1/2 Bsp F	2107	74,32	1	✓

Min. flow rate 9 l/min 2,4 USGpm
 Max. flow rate 60 l/min 16 USGpm
 Rated Temperature 60 °C 140 °F
 Max. Temper. 90 °C 195 °F
 Material Stainless steel 303

Patent No.: I-1387704/-US-2009-0205716-A1/-EP 2 093 643 A2/-ZL200810131662.7 / Eu 2093643


VB60/600 ZERO WITH MICRO-SWITCH- VALVE WITH ZEROED OUTLET PRESSURE, IN BYPASS

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.2650.00	1/2 Bsp F	1/2 Bsp F	1/2 Bsp F	2250	79,4	1	✓

Permissible Pressure 600 bar - 60 MPa 8700 psi
 Max. flow rate 60 l/min 16 USGpm
 Min. flow rate 9 l/min 2,4 USGpm
 Rated Temperature 60 °C 140 °F
 Max. Temper. 90 °C 195 °F
 Material Stainless steel 303
 Max. Curr. Strength 6 (2) A
 Max. Voltage 250 V

Patent No.: I-1387704/-US-2009-0205716-A1/-EP 2 093 643 A2/-ZL200810131662.7 / Eu 2093643


VB40/1000 ZERO - VALVE WITH ZEROED OUTLET PRESSURE, IN BYPASS
NEW

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.2900.00	3/8 Bsp F	3/8 Bsp F	3/8 Bsp F	4650	164	1	✓
60.2900.12	3/8 Bsp F	3/8 Bsp F	3/8 Bps M	4650	167,6	1	
Flow rate 9-15 litri/min							
60.2900.20	3/8 Bsp F	3/8 Bsp F	3/8 Bps M	4650	167,6	1	
Flow rate 15-25 litri/min							

Rated Pressure 1000 bar - 100 MPa 14500 psi
 Permissible Pressure 1100 bar - 110 MPa 16000 psi
 Min. flow rate 9 l/min 2,4 USGpm
 Max. flow rate 40 l/min 10,5 USGpm
 Rated Temperature 60 °C 140 °F
 Max. Temper. 95 °C 203 °F
 Material Stainless steel 303

Patent No.: I-1387704/-US-2009-0205716-A1/-EP 2 093 643 A2/-ZL200810131662.7 / Eu 2093643






STR -ADJUSTING BYPASS NEEDLE **NEW**

P/N	Rated Flow		Rated pr.		Permiss.press.		Inlet	Outlet	Type	Weight			
	l/min	USGpm	bar - MPa	psi	bar - MPa	psi				gr	oz		
60.2620.00	25	6,5	70 - 7	1015	80 - 8	1150	3/8 Bsp M	3/8 Bsp F	A	428	15,1	2	✓
60.2631.31							1/2 Bsp M	3/8 Bsp F	B	37	1,3	2	
60.2635.00	60	16	110 - 11	1600	120 - 12	1740	3/8 Bsp F	3/8 Bsp F	C	404	14,25	2	
13.5030.00							1/2 Bsp M	3/8 Bsp M	D	72	2,5	25	✓
13.5025.00							3/8 Bsp M	3/8 Bsp M	E	43	1,5	25	✓

Outlet
Rated Temperature 90 °C
Material 3/8 Bsp F 195 °F Brass

Adjustable pressure restrictor for bypass water, in "Zero" valve.



VS 30

P/N	Inlet	Bypass	Weight			
			gr	oz		
60.0560.30	1/4 Bsp M	1/8Bsp F+13mm h.barb	133	4,69	10	✓
Rated Pressure	30 bar - 3 MPa		435 psi			
Permissible Pressure	35 bar - 3,5 MPa		510 psi			
Rated Flow	14 l/min		3,7 USGpm			
Rated Temperature	90 °C		195 °F			

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 100 - AISI 316 - VITON O-RINGS

P/N	Rated pr.		Permiss.press.		Weight			
	bar - MPa	psi	bar - MPa	psi	gr	oz		
60.0470.60	125 - 12,5	1813	140 - 14	2300	402	14,18	1	✓
Rated Flow	20 l/min		5,3 USGpm					
Rated Temperature	90 °C		195 °F					
Inlet			1/4 Bsp F					
Bypass			1/4 Bsp F					
Material			Stainless steel Ai316					
Seals material			Viton					

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 160

P/N	Inlet	Bypass	Weight			
			gr	oz		
60.0560.00	1/4 Bsp M	1/8Bsp F+13mm h.barb	138	4,87	10	✓
Rated Pressure	140 bar - 14 MPa		2000 psi			
Permissible Pressure	160 bar - 16 MPa		2300 psi			
Rated Flow	14 l/min		3,7 USGpm			
Rated Temperature	90 °C		195 °F			

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 450-200

P/N	Inlet	Bypass	Weight			
			gr	oz		
60.4120.00	1" 1/4 Bsp F	1" 1/4 Bsp F	3848	135,72	1	✓
60.4120.50	1"1/4 Npt F	1" 1/4 Npt F	3800	134	1	
Rated Pressure	200 bar - 20 MPa		2900 psi			
Permissible Pressure	220 bar - 22 MPa		3200 psi			
Rated Flow	450 l/min		120 USGpm			
Rated Temperature	90 °C		195 °F			

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.





VS 140 - VS 240

P/N	Rated pr.		Permiss.press.		Inlet	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.1550.00	140 - 14	2000	180 - 18	2600	3/8 Bsp M	174	6,14	15	✓
60.1560.00	240 - 24	3500	290 - 29	4200	3/8 Bsp M	174	6,14	15	✓
60.1570.00	140 - 14	2000	180 - 18	2600	3/8 Npt M	174	6,14	15	✓
60.1580.00	240 - 24	3500	290 - 29	4200	3/8 Npt M	175	6,17	15	✓

Rated Flow
Rated Temperature
Shutter

24 l/min
60 °C

6,3 USGpm
140 °F
Delrin ball

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine.
See Technical Manual.



VS 170 - VS 220 -1 INLET PORT

P/N	Rated pr.		Permiss.press.		Weight			
	bar - MPa	psi	bar - MPa	psi	gr	oz		
60.0540.00	150 - 15	2200	170 - 17	2450	368	12,98	40	✓
60.0515.00	220 - 22	3200	250 - 25	3650	370	13,05	40	✓

Rated Flow
Rated Temperature
Inlet
Bypass

24 l/min
90 °C

6,3 USGpm
195 °F
3/8 Bsp F
3/8 Bsp F

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 170 - VS 220 - 2 INLET PORTS

P/N	Rated pr.		Permiss.press.		Bypass	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.0528.00	150 - 15	2200	170 - 17	2450	3/8 Bsp F	406	14,2	40	✓
60.0525.00	220 - 22	3200	250 - 25	3650	3/8 Bsp F	406	14,2	40	✓
60.0525.15	220 - 22	3200	250 - 25	3650	1/4 Bsp M	389	13,72	40	✓
60.0530.00	150 - 15	2200	170 - 17	2450	3/8 Npt F	406	14,2	40	

Inlet ports : 2 × 3/8 Npt F

Rated Flow
Rated Temperature
Inlet

24 l/min
90 °C

6,3 USGpm
195 °F
2× 3/8 Bsp F

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 200/180

P/N	Inlet	Bypass	Type	Weight			
				gr	oz		
60.5100.15	3/4 Bsp F	1/2 Bsp F	B	816	28,78	4	✓
60.5100.00	3/4 Npt F	1/2 Npt F	B	821	28,96	4	✓
60.5115.00	3/4 Bsp F	1/2 Bsp F	A	905	31,92	4	✓


Possibility to seal calibration

Rated Pressure
Permissible Pressure
Rated Flow
Rated Temperature

180 bar - 18 MPa
200 bar - 20 MPa
200 l/min
90 °C

2600 psi
2900 psi
53 USGpm
195 °F

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 28 / 1 - 2 - 3

P/N	Type	Rated Flow Rate		Weight			
		l/min	USGpm	gr	oz		
60.0555.00	1	8 - 12	2,1 - 3,2	56	1,98	10	✓
60.0555.20	2	12 - 16	3,2 - 4,2	56	1,98	10	✓
60.0555.30	3	16 - 19,5	4,2 - 5,15	56	1,98	10	✓

Rated Pressure 100-250 bar 1450-3650 psi
 Rated Temperature 108 °C 225 °F
 Shutter Sst. ball
 Inlet 1/4 Bsp M
 Outlet 16mm hose barb



The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.

VS 28 / 1 - 2 PRESSURE ADJUSTED

P/N	Type	Rated Flow		Operat. press.		Weight			
		l/min	USGpm	bar - MPa	psi	gr	oz		
60.0555.15	1	8-12	2,1-3,2	165 - 16,5	2390	56	1,98	10	
60.0555.16	2	12-16	3,2-4,2	165 - 16,5	2390	56	1,98	10	✓
60.0555.22	2	12-16	3,2-4,2	220 - 22	3200	56	1,98	10	✓

Rated Temperature 108 °C 225 °F
 Shutter Sst. ball
 Inlet 1/4 Bsp M
 Outlet 16mm hose barb



The safety valves supplied are pressure adjusted (±3%) and sealed

VS 80/150 -ATEX AISI 303

P/N	Rated pr.		Permiss.press.		Weight			
	bar - MPa	psi	bar - MPa	psi	gr	oz		
60.0593.00	150 - 15	2200	170 - 17	2450	1196	42,18	1	✓

Rated Flow 80 l/min 21 USGpm
 Rated Temperature 70 °C 158 °F
 Couplings 1/2 Bsp F
 Material Stainless steel 303

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.






VS 80/150-280 -ATEX AISI 316 - VITON O-RINGS



P/N	Rated pr.		Permiss.press.		Type	Weight		
	bar - MPa	psi	bar - MPa	psi		gr	oz	
60.0590.00	150 - 15	2200	170 - 17	2450	B	1204	42,47	1
60.0590.60	280 - 28	4050	310 - 31	4500	A	1238	43,67	1

Rated Flow	80 l/min	21 USGpm
Rated Temperature	70 °C	158 °F
Couplings		1/2 Bsp F
Material	Stainless steel AISI316	
Seals material	Viton	

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.

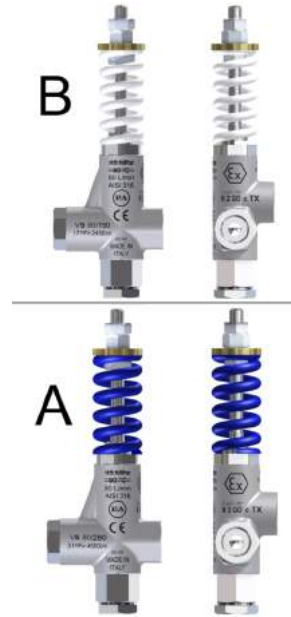

VS 26 - AISI 316 - VITON O-RINGS



P/N	Rated pr.		Permiss.press.		Weight		
	bar - MPa	psi	bar - MPa	psi	gr	oz	
60.1540.00	280 - 28	4050	310 - 31	4500	856	30,19	1

Rated Flow	80 l/min	21 USGpm
Rated Temperature	90 °C	195 °F
Inlet		1/2 Bsp F
Bypass		1/2 Bsp F
Material	Stainless steel AISI316	
Seals material	Viton	

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 450-300



P/N	Inlet	Bypass	Weight		
			gr	oz	
60.4130.00	1" 1/4 Bsp F	1" 1/4 Bsp F	3970	140,03	1
60.4130.50	1"1/4 Npt F	1" 1/4 Npt F	3964	139,81	1

Rated Pressure	300 bar - 30 MPa	4350 psi
Permissible Pressure	330 bar - 33 MPa	4800 psi
Rated Flow	450 l/min	120 USGpm
Rated Temperature	90 °C	195 °F

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 310 -1 INLET PORT

P/N	Rated pr.		Permiss.press.		Weight				
	bar - MPa	psi	bar - MPa	psi	gr	oz			
60.0500.00	310 - 31	4500	350 - 35	5100	380	13,4	4	✓	
Rated Flow			40 l/min		10,5 USGpm				
Rated Temperature			90 °C		195 °F				
Inlet					3/8 Bsp F				
Bypass					3/8 Bsp F				


The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 350

P/N	Inlet	Bypass	Type	Weight				
				gr	oz			
60.0580.00	2× 3/8 Bsp F	3/8 Bsp F	B	480	16,93	25	✓	
60.0588.00	2× 3/8 Bsp F	3/8 Bsp F	A	526	18,55	25		
Possibility to seal calibration								
Rated Pressure			350 bar - 35 MPa		5100 psi			
Permissible Pressure			390 bar - 39 MPa		5650 psi			
Rated Flow			25 l/min		6,5 USGpm			
Rated Temperature			90 °C		195 °F			

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 360

P/N	Rated pr.		Permiss.press.		Weight				
	bar - MPa	psi	bar - MPa	psi	gr	oz			
60.1520.00	350 - 35	5100	390 - 39	5650	924	32,59	5	✓	
Rated Flow			40 l/min		10,5 USGpm				
Rated Temperature			90 °C		195 °F				
Inlet					3/8 Bsp MF				
Bypass					1/2 Bsp F				

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 24 - VS 43 - AISI 303

P/N	Rated pr.		Permiss.press.		Type	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.1530.00	280 - 28	4050	310 - 31	4500	A	852	30,05	5	
60.1535.00	400 - 40	5800	440 - 44	6400	B	896	31,6	5	
Rated Flow			80 l/min		21 USGpm				
Rated Temperature			90 °C		195 °F				
Inlet					1/2 Bsp F				
Bypass					1/2 Bsp F				
Material					Stainless steel 303				

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.





VS 80/400 ATEX - AISI 303



P/N	Inlet	Bypass	Weight			
			gr	oz		
60.0550.00	1/2 Bsp F	1/2 Bsp F	1276	45	1	✓
60.0550.50	1/2 Npt F	1/2 Npt F	1250	44,3	1	



Rated Pressure	400 bar - 40 MPa	5800 psi
Permissible Pressure	450 bar - 45 MPa	6500 psi
Rated Flow	80 l/min	21 USGpm
Rated Temperature	70 °C	158 °F
Material	Stainless steel 303	

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 80/280-400 -ATEX -SST. DUPLEX - VITON O-RINGS





P/N	Rated pr.		Permiss.press.		Type	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.4590.28	280 - 28	4050	310 - 31	4500	B	1304	45,99	1	
60.4590.40	400 - 40	5800	450 - 45	6500	A	1304	45,99	1	



Rated Flow	80 l/min	21 USGpm
Rated Temperature	70 °C	158 °F
Couplings	1/2 Bsp F	
Material	Stainless steel duplex	
Seals material	Viton	

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.

VS 500-VS 500/310 **NEW**

P/N	Rated pr.		Permiss.press.		Type	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.5200.00	500 - 50	7250	560 - 56	8100	B	1461	51,53	1	✓
60.5230.00	310 - 31	4500	350 - 35	4900	B	1461	51,53	1	✓
60.5212.00	500 - 50	7250	560 - 56	8100	A	1518	53,54	1	✓




Possibility to seal calibration

60.5232.00	310 - 31	4500	350 - 35	4900	A	1518	53,54	1	
------------	----------	------	----------	------	---	------	-------	---	--

Possibility to seal calibration

Rated Flow	80 l/min	21 USGpm
Rated Temperature	90 °C	195 °F
Inlet	1/2 Bsp F	
Bypass	3/8 Bsp F	

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 500- PRESSURE ADJUSTED VALVE.

P/N	Operat. press.		Type	Weight			
	bar - MPa	psi		gr	oz		
60.5212.30	300 - 30	4350	A	1518	53,54	1	
Possibility to seal calibration							
60.5212.55	550 - 55	7950	A	1518	53,54	1	
Possibility to seal calibration							

Rated Flow 80 l/min 21 USGpm
 Rated Temperature 90 °C 195 °F
 Inlet 1/2 Bsp F
 Bypass 3/8 Bsp F

The valves supplied are PRESSURE ADJUSTED. See Technical Manual.



VS 500- SST **NEW**

P/N	Rated pr.		Permiss.press.		Weight			
	bar - MPa	psi	bar - MPa	psi	gr	oz		
60.0690.00	500 - 50	7250	560 - 56	8100	1300	45,85	1	
Rated Flow 30 l/min 8 USGpm Rated Temperature 90 °C 195 °F Material Stainless steel 303 Inlet 3/8 Bsp F Bypass 3/8 Bsp F								


The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 660

P/N	Inlet	Bypass	Type	Weight			
				gr	oz		
60.0650.00	3/8 Bspt F	1/2 Bspt F	B	1845	65	1	
60.0645.00	3/8 Bspt F	1/2 Bspt F	A	1888	66,59	1	
Rated Pressure 660 bar - 66 MPa 9500 psi Permissible Pressure 720 bar - 72 MPa 10450 psi Rated Flow 60 l/min 16 USGpm Rated Temperature 90 °C 195 °F Material Sst.+ nick.pl. brass							


The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.



VS 1100 **NEW**

P/N	Inlet	Bypass	Type	Weight			
				gr	oz		
60.0680.00	3/8 Bsp F	3/8 Bsp F	A	2100	74	1	✓
Rated Pressure 1000 bar - 100 MPa 14500 psi Permissible Pressure 1100 bar - 110 MPa 16000 psi Min. operating pressure 500 bar - 50 MPa 7250 psi Rated Flow 40 l/min 10,6 USGpm Rated Temperature 100 °C 212 °F Max. working temperature 120 °C 248 °F Material Sst.+ nick.pl. brass							

The valves supplied are NOT PRESSURE ADJUSTED. They become a SAFETY device when adjusted by the installer on the machine. See Technical Manual.





VS 23-280- PED AISI 303

P/N	Operat. press.		Weight			 
	bar - MPa	psi	gr	oz		
60.1423.14	140 - 14	2030	920	32,45	1	
60.1423.15	150 - 15	2175	920	32,45	1	
60.1423.20	200 - 20	2900	920	32,45	1	
60.1423.22	220 - 22	3190	920	32,45	1	
60.1423.25	250 - 25	3625	920	32,45	1	
60.1423.28	280 - 28	4060	920	32,45	1	

Rated Flow	70 l/min	18,5 USGpm
Rated Temperature	200 °C	390 °F
Material	Stainless steel 303	
Couplings	1/2 Bsp F	

The safety valves supplied are pressure adjusted, lead sealed and numbered.



VS 23-280 -DUPLEX PED ATEX

P/N	Operat. press.		Weight			 
	bar - MPa	psi	gr	oz		
60.1430.28	280 - 28	4060	920	32,45	1	

Rated Flow	70 l/min	18,5 USGpm
Rated Temperature	70 °C	158 °F
Material	Stainless steel duplex	
Couplings	1/2 Bsp F	

The safety valves supplied are pressure adjusted, lead sealed and numbered.



VRP 175

P/N	Inlet	Bypass	Weight			
			gr	oz		
60.0545.00	2× 1" Bsp F	1" Bsp F	1956	68,99	1	✓
60.0545.50	2 x 1" Npt F	1" Npt F	1956	68,99	1	

Rated Pressure	150 bar - 15 MPa	2200 psi
Permissible Pressure	170 bar - 17 MPa	2450 psi
Rated Flow	200 l/min	53 USGpm
Rated Temperature	90 °C	195 °F



VRP 450-200

P/N	Inlet	Bypass	Weight			
			gr	oz		
60.4220.00	2× 1" 1/4 Bsp F	1" 1/2 Bsp F	5895	208	1	

Rated Pressure	200 bar - 20 MPa	2900 psi
Permissible Pressure	220 bar - 22 MPa	3200 psi
Rated Flow	450 l/min	120 USGpm
Rated Temperature	90 °C	195 °F



VRP 200

P/N	Rated pr.		Permiss.press.		Couplings	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.0220.00	100 - 10	1450	120 - 12	1750	3/8 Bsp F	570	20,1	25	✓
60.0220.05	100 - 10	1450	120 - 12	1750	3/8 Npt F	556	19,61	25	✓
60.0220.60	220 - 22	3200	250 - 25	3650	3/8 Bsp F	605	21	25	✓
60.0220.65	220 - 22	3200	250 - 25	3650	3/8 Npt F	586	20,67	25	✓

Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F



VRP 280

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.0542.00	3/8 Bsp M	3/8 Bsp F	1/2 Bsp F	823	29	5	

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	90 °C	195 °F





VRP 26 - AISI 316 - VITON O-RINGS

P/N	Rated pr.		Permiss.press.		Weight			
	bar - MPa	psi	bar - MPa	psi	gr	oz		
60.0675.00	280 - 28	4050	310 - 31	4500	836	29,51	1	
Rated Flow			80 l/min		21 USGpm			
Rated Temperature			90 °C		195 °F			
Couplings					1/2 Bsp F			
Material					Stainless steel AISI 316			
Seals material					Viton			



VRP 450-300

P/N	Inlet	Bypass	Weight			
			gr	oz		
60.4230.00	2x 1" 1/4 Bsp F	1" 1/2 Bsp F	5980	197	1	
Rated Pressure			300 bar - 30 MPa		4350 psi	
Permissible Pressure			330 bar - 33 MPa		4800 psi	
Rated Flow			450 l/min		120 USGpm	
Rated Temperature			90 °C		195 °F	



VRP 350

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.0660.00	3/8 Bsp M	3/8 Bsp F	1/2 Bsp F	823	29	1	
Rated Pressure		350 bar - 35 MPa		5100 psi			
Permissible Pressure		390 bar - 39 MPa		5650 psi			
Rated Flow		40 l/min		10,5 USGpm			
Rated Temperature		90 °C		195 °F			



VRP 23 - VRP 43 - AISI 303

P/N	Rated pr.		Permiss.press.		Type	Weight			
	bar - MPa	psi	bar - MPa	psi		gr	oz		
60.0665.00	280 - 28	4050	310 - 31	4500	A	930	32,8	1	✓
60.0670.00	400 - 40	5800	440 - 44	6400	B	958	33,79	1	
Rated Flow			80 l/min		21 USGpm				
Rated Temperature			90 °C		195 °F				
Couplings					1/2 Bsp F				
Material					Stainless steel 303				



VRP 600

P/N	Inlet	Bypass	Weight			
			gr	oz		
60.5400.00	1/2 Bsp F	1/2 Bsp F	950	33,51	1	✓
Rated Pressure	560 bar - 56 MPa		8100 psi			
Permissible Pressure	600 bar - 60 MPa		8700 psi			
Rated Flow	80 l/min		21 USGpm			
Rated Temperature	90 °C		195 °F			
Material	Stainless steel 303					






VRPP 170 AIR-CONTROLLED

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.5300.00	1 Bsp F	1" Bsp F	1" Bsp F	4015	141,7	1	✓
Rated Pressure	150 bar - 15 MPa			2200 psi			
Permissible Pressure	170 bar - 17 MPa			2450 psi			
Rated Flow	200 l/min			53 USGpm			
Rated Temperature	90 °C			196 °F			
Required air pressure	6 bar - 0,6 MPa			87 psi			
Compressed air fitting				1/4 Bsp F			



VRPP 450-200 AIR-CONTROLLED

P/N	Type	Inlet	Outlet	Bypass	Weight			
					gr	oz		
60.5360.00	A	1" 1/4 Bsp F	1" 1/4 Bsp F	1" 1/4 Bsp F	8546	301,42	1	✓
Rated Pressure		200 bar - 20 MPa			2900 psi			
Permissible Pressure		220 bar - 22 MPa			3200 psi			
Rated Flow		450 l/min			120 USGpm			
Rated Temperature		90 °C			196 °F			
Required air pressure		6 bar - 0,6 MPa			87 psi			
Compressed air fitting					1/4 Bsp F			

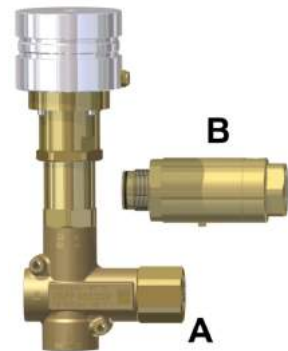

VRPP 33 - HT AIR-CONTROLLED

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.5333.00	1/2 Bsp F	1/2 Bsp F	1/2 Bsp F	3784	133,47	1	
Rated Pressure	280 bar - 28 MPa			4050 psi			
Permissible Pressure	310 bar - 31 MPa			4500 psi			
Rated Flow	80 l/min			21 USGpm			
Rated Temperature	90 °C			196 °F			
Max. Temper.	85 °C			185 °F			
Material				Brass			
Required air pressure	6 bar - 0,6 MPa			87 psi			
Compressed air fitting				1/4 Bsp F			



VRPP 26 - AISI316 AIR-CONTROLLED

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.5350.00	1/2 Bsp F	1/2 Bsp F	1/2 Bsp F	3784	133,47	1	
Rated Pressure	280 bar - 28 MPa			4050 psi			
Permissible Pressure	310 bar - 31 MPa			4500 psi			
Rated Flow	80 l/min			21 USGpm			
Rated Temperature	90 °C			196 °F			
Material				Stainless steel AISI316			
Required air pressure	6 bar - 0,6 MPa			87 psi			
Compressed air fitting				1/4 Bsp F			



VRPP 200-280 AIR-CONTROLLED

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.5330.00	1 Bsp F	1" Bsp F	1" Bsp F	5386	189,97	1	✓
Rated Pressure		280 bar - 28 MPa			4050 psi		
Permissible Pressure		310 bar - 31 MPa			4500 psi		
Rated Flow		200 l/min			53 USGpm		
Rated Temperature		90 °C			196 °F		
Required air pressure		6 bar - 0,6 MPa			87 psi		
Compressed air fitting					1/4 Bsp F		



VRPP 600 - AISI 303 AIR-CONTROLLED

P/N	Inlet	Outlet	Bypass	Weight			
				gr	oz		
60.5450.00	1/2 Bsp F	1/2 Bsp F	1/2 Bsp F	3820	134,73	1	✓
Rated Pressure		560 bar - 56 MPa			8100 psi		
Permissible Pressure		600 bar - 60 MPa			8700 psi		
Rated Flow		80 l/min			21 USGpm		
Rated Temperature		90 °C			195 °F		
Required air pressure		6 bar - 0,6 MPa			87 psi		
Compressed air fitting					1/4 Bsp F		





VNR - O BRASS CHECK VALVE

P/N	Rated Flow		Rated Ø	Couplings	Weight			
	l/min	USGpm			gr	oz		
60.2040.00	25	6,5	8	1/4 Bsp FF	58	2,05	15	✓
60.2050.00	40	10,5	10	3/8 Bsp FF	112	3,95	15	✓
60.2065.00	80	21	15	1/2 Bsp FF	200	7,1	15	✓
60.2075.00	180	47,6	20	3/4 Bsp FF	370	13,1	15	✓

Rated Pressure 150 bar - 15 MPa 2200 psi
 Permissible Pressure 160 bar - 16 MPa 2300 psi
 Rated Temperature 90 °C 195 °F
 Material Brass



VNR - OHD BRASS CHECK VALVE

P/N	Rated Flow		Rated Ø	Couplings	Weight			
	l/min	USGpm			gr	oz		
60.2100.00	25	6,5	8	1/4 Bsp FF	114	4	10	✓
60.2120.00	40	10,5	10	3/8 Bsp FF	192	6,8	10	✓
60.2140.00	80	21	15	1/2 Bsp FF	446	15,7	10	✓
60.2150.00	140	37	20	3/4 Bsp FF	822	28,99	2	✓
60.2160.00	200	53	25	1" Bsp F	1348	47,55	1	
60.2170.00	450	120	32	1"1/4 Bsp FF	1954	68,92	1	

Rated Pressure 280 bar - 28 MPa 4000 psi
 Permissible Pressure 310 bar - 31 MPa 4500 psi
 Rated Temperature 90 °C 195 °F
 Material Brass



VNR - IHD- STAINLESS STEEL CHECK VALVE

P/N	Rated Flow		Rated Ø	Couplings	Weight			
	l/min	USGpm			gr	oz		
60.2145.00	80	21	15	1/2 Bsp FF	544	19,19	2	

Rated Pressure 350 bar - 35 MPa 5000 psi
 Permissible Pressure 390 bar - 39 MPa 5650 psi
 Rated Temperature 90 °C 195 °F
 Material Stainless steel



VNR - I STAINLESS STEEL CHECK VALVE **NEW**

P/N	Rated Flow		Rated Ø	Couplings	Seals material	Weight			
	l/min	USGpm				gr	oz		
60.2030.00	25	6,5	8	1/4 Bsp FF	Viton	54	1,9	15	✓
60.2010.18	25	6,5	8	1/4 Bsp FF	Epdm	54	1,9	15	✓
60.2030.50	25	6,5	8	1/4 Npt FF	Viton	54	1,9	15	
60.2020.00	40	10,5	10	3/8 Bsp FF	Viton	104	3,7	15	✓
60.2020.50	40	10,5	10	3/8 Npt FF	Viton	104	3,7	15	
60.2070.00	80	21	15	1/2 Bsp FF	Viton	188	6,63	15	✓
60.2070.50	80	21	15	1/2 Npt FF	Viton	193	6,81	15	
60.2080.00	180	47,6	20	3/4 Bsp FF	Viton	344	12,13	15	✓

Rated Pressure 400 bar - 40 MPa 5800 psi
 Permissible Pressure 450 bar - 45 MPa 6500 psi
 Rated Temperature 90 °C 195 °F
 Material Stainless steel



RF1 - FLOW REGULATOR

P/N	Inlet	Outlet	Weight			
			gr	oz		
29.0400.00	1/4 Bsp M	1/4 Bsp F	186	6,56	10	✓
Rated Pressure	250 bar - 25 MPa		3650 psi			
Permissible Pressure	280 bar - 28 MPa		4050 psi			
Rated Flow	30 l/min		8 USGpm			
Rated Temperature	160 °C		320 °F			

Throttling regulator for adjustable flow control



RV1- STEAM VALVE

P/N	Nozzle Size	Couplings	Col.	Weight			
				gr	oz		
29.0920.08	01	1/4 Bsp MM	Red	163	5,75	10	
29.0920.12	02	1/4 Bsp MM	Red	162	5,71	10	✓
29.0920.82	02	1/4 Bsp MM	Blue	162	5,71	10	
29.0920.15	03	1/4 Bsp MM	Red	162	5,71	10	✓
29.0920.65	03	1/4 Bsp MM	Black	155	5,4	10	
29.0920.85	03	1/4 Bsp MM	Blue	163	5,75	10	
29.0920.20	043	1/4 Bsp MM	Red	162	5,71	10	✓
29.0920.70	043	1/4 Bsp MM	Black	163	5,75	10	✓
Panel fitting		17 mm		3/4" in			
Rated Pressure		250 bar - 25 MPa		3650 psi			
Permissible Pressure		280 bar - 28 MPa		4050 psi			
Rated Temperature		80 °C		175 °F			

Throttling nozzle for bypass flow control



ES1 -EASY STARTER

P/N	Inlet	Hose barb		Weight			
		mm	in	gr	oz		
29.0100.60	1/4 Bsp M	8	1/4	126	4,44	15	✓
29.0100.50	3/8 Bsp M	8	1/4	134	4,73	15	✓
29.0100.00	3/8 Npt M	8	1/4	136	4,8	15	✓
Rated Pressure		280 bar - 28 MPa			4050 psi		
Permissible Pressure		310 bar - 31 MPa			4500 psi		
Rated Flow		30 l/min			8 USGpm		
Rated Temperature		80 °C			175 °F		

It delays pressure increase by pump start.



RG1 - THROTTLE CONTROL

P/N	Working press.		Stroke		Weight			
	bar	psi	mm	in	gr	oz		
29.0120.00	15-250	218-3650	7	0,27	140	4,94	5	✓
29.0130.00	15-250	218-3650	14	0,54	158	5,57	5	✓
Rated Pressure		250 bar - 25 MPa			3650 psi			
Permissible Pressure		280 bar - 28 MPa			4050 psi			
Rated Temperature		160 °C			320 °F			
Inlet					1/4 Bsp M			

For engine motors - It slows RPM down when bypass is activated





RGV - THROTTLE CONTROL-ADJUSTABLE STROKE

P/N	Working press.		Stroke		Weight			
	bar	psi	mm	in	gr	oz		
29.0410.00	7-350	100-5100	7-15	0,28-0,55	260	9,21	5	
Rated Pressure	350 bar - 35 MPa				5100 psi			
Permissible Pressure	390 bar - 39 MPa				5650 psi			
Rated Temperature	160 °C				320 °F			
Max. working temperature	90 °C				195 °F			
Inlet					1/4 Bsp M			

For engine motors - It slows RPM down when bypass is activated



RGV 500 - THROTTLE CONTROL-ADJUSTABLE STROKE **NEW**

P/N	Working press.		Stroke		Weight			
	bar	psi	mm	in	gr	oz		
29.0420.00	7-550	100-8000	7-15	0,28-0,55	162	5,71	5	
Rated Pressure	500 bar - 50 MPa				7300 psi			
Permissible Pressure	550 bar - 55 MPa				8000 psi			
Rated Temperature	160 °C				320 °F			
Max. working temperature	90 °C				195 °F			
Inlet					1/4 Bsp M			

For engine motors - It slows RPM down when bypass is activated




RL 124

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5300.00	1/2 Bsp F	1/2 Bsp F	1280	45,15	1	✓
Rated Pressure	120 bar - 12 MPa		1750 psi			
Permissible Pressure	135 bar - 13,5 MPa		1950 psi			
Rated Flow	120 l/min		32 USGpm			
Rated Temperature	100 °C		210 °F			
Extensions			30.4000.40-80			



RL124 LANCE AND NOZZLE HOLDER

P/N	Length		Inlet	Outlet	Type	Weight			
	mm	in.				gr	oz		
30.4000.40	400	15,7	1/2 Bsp M	1/4 Npt F	A	745	26,28	1	✓
30.4000.80	800	31,5	1/2 Bsp M	1/4 Npt F	A	1264	44,58	1	✓
30.5018.61			Nipple 1/2 Bsp M	1/4 Npt F	B	55	2	1	
Nozzle holder									
Rated Pressure		120 bar - 12 MPa			1750 psi				
Permissible Pressure		135 bar - 13,5 MPa			1950 psi				
Rated Flow		100 l/min			26,5 USGpm				
Rated Temperature		43 °C			109 °F				
Material		Zinc plated steel							



RL 34 + SW - FOAM GUN - WIDE PASSAGES

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2900.00	+ sw. 1/2 Bsp F	1/2 Bsp F	645	22,75	2	✓
Inlet with swivel						
Rated Pressure	180 bar - 18 MPa		2600 psi			
Permissible Pressure	200 bar - 20 MPa		2900 psi			
Rated Flow	80 l/min		21 USGpm			
Rated Temperature	160 °C		320 °F			
Material			Brass			

Brass spray gun, with wider inner passages



RL 82 + SW - SST FOAM GUN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2800.00	+ sw. 1/2 Bsp F	1/2 Bsp F	616	21,73	2	✓
Inlet with swivel						
Rated Pressure	180 bar - 18 MPa		2600 psi			
Permissible Pressure	200 bar - 20 MPa		2900 psi			
Rated Flow	80 l/min		21 USGpm			
Rated Temperature	160 °C		320 °F			
Material			Stainless steel			

Sst spray gun, with wider inner passages





RL 86 + SW - SST AI 316 FOAM GUN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2830.60	+ sw. 1/2 Bsp F	1/2 Bsp F	626	22,08	2	✓
Inlet with swivel						
Rated Pressure	180 bar - 18 MPa		2600 psi			
Permissible Pressure	200 bar - 20 MPa		2900 psi			
Rated Flow	80 l/min		21 USGpm			
Rated Temperature	160 °C		320 °F			
Material	Stainless steel A1316					

Sst spray gun, with wider inner passages



RL 16

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0000.20	1/4 Bsp F	1/4 Bsp F	256	9,03	20	✓
30.0000.40	1/4 Bsp M	1/4 Bsp F	256	9,03	20	✓
30.0000.00	3/8 Bsp F	1/4 Bsp F	270	9,52	20	✓
30.0000.50	3/8 Npt F	1/4 Npt F	269	9,49	20	✓
Rated Pressure	160 bar - 16 MPa		2300 psi			
Permissible Pressure	175 bar - 17,5 MPa		2550 psi			
Rated Flow	30 l/min		8 USGpm			
Rated Temperature	100 °C		210 °F			



RL 11

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0800.00	3/8 Bsp F	1/4 Bsp F	434	15,31	20	
30.0800.20	A M22	1/4 Bsp F	431	15,2	20	
Rated Pressure	160 bar - 16 MPa		2300 psi			
Permissible Pressure	175 bar - 17,5 MPa		2550 psi			
Rated Flow	30 l/min		8 USGpm			
Rated Temperature	100 °C		210 °F			



LINEAR 100/170

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0650.00	1/2 Bsp F	1/2 Bsp F	1176	41,48	1	
30.0650.50	1/2 Npt F	1/2 Npt F	1176	41,48	1	✓
Rated Pressure	170 bar - 17 MPa		2500 psi			
Permissible Pressure	190 bar - 19 MPa		2800 psi			
Rated Flow	100 l/min		27 USGpm			
Rated Temperature	100 °C		210 °F			



RL 20

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0100.20	1/4 Bsp F	1/4 Bsp F	262	9,24	20	✓
30.0100.30	1/4 Bsp M	1/4 Bsp F	256	9,03	20	
30.0100.00	3/8 Bsp F	1/4 Bsp F	272	9,59	20	✓
30.0100.60	3/8 Bsp M	1/4 Bsp F	265	9,3	20	✓
30.0100.40	A M22	1/4 Bsp F	280	9,87	20	
30.0100.50	3/8 Npt F	1/4 Npt F	276	9,73	20	✓

Rated Pressure	200 bar - 20 MPa	2900 psi
Permissible Pressure	220 bar - 22 MPa	3200 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RP30/160 - RP80/160 -RP120/160 - PNEUMATIC ON-OFF GUNS

P/N	Rated Flow		Inlet	Outlet	Weight			
	l/min	USGpm			gr	oz		
30.3280.00	30	8	1/4 Bsp F	1/4 Bsp F	548	19,33	1	✓
30.3260.00	80	21	1/2 Bsp F	1/2 Bsp F	1080	38,1	1	✓
30.3200.00	120	32	3/4 Bsp F	3/4 Bsp F	1862	65,67	1	✓

Rated Pressure	160 bar - 16 MPa	2300 psi
Permissible Pressure	175 bar - 17,5 MPa	2550 psi
Rated Temperature	90 °C	195 °F
Required air pressure	7 bar - 0,7 MPa	101 psi
Compressed air fitting		1/4 Bsp F



RL 204

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5200.00	3/4 Bsp F	1/2 Bsp F	1331	46,94	1	✓

Rated Pressure	200 bar - 20 MPa	2900 psi
Permissible Pressure	220 bar - 22 MPa	3200 psi
Rated Flow	200 l/min	53 USGpm
Rated Temperature	100 °C	210 °F
Extensions		30.5000.40-80-92



RL 204 + SW.5

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5230.00	+ sw.5 3/4Bsp F	1/2 Bsp F	1348	47,5	1	

Rated Pressure	200 bar - 20 MPa	2900 psi
Permissible Pressure	220 bar - 22 MPa	3200 psi
Rated Flow	200 l/min	53 USGpm
Rated Temperature	100 °C	210 °F
Extensions		30.5000.40-80-92





Spray guns up to 32 MPa -4550 psi

RL 26

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1755.15	1/4 Bsp M	1/4 Bsp F	390	13,65	20	
30.1755.00	3/8 Bsp M	1/4 Bsp F	394	13,9	20	✓
30.1755.30	3/8 Bsp F	1/4 Bsp F	404	14,25	20	✓
30.1755.50	3/8 Npt F	1/4 Npt F	400	14,11	20	✓
30.1755.60	A M22	1/4 Bsp F	409	14,43	20	✓
30.1756.00	1/4 Bsp F	1/4 Bsp F	446	15,73	20	✓

With ceramic ball - Suitable for chlore

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL 26 + SW6 / SW8

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1772.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	480	16,93	20	✓
30.1758.00	+ sw.6 3/8 Bsp F	1/4 Bsp F	476	16,79	20	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL 51

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.4100.10	3/8 Bsp F	1/4 Bsp F	684	24,13	8	✓
30.4100.60	3/8 Npt F	1/4 Npt F	684	24,13	8	✓
30.4120.10	+ sw. 3/8 Bsp F	1/4 Bsp F	776	27,37	8	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	50 l/min	13,2 USGpm
Rated Temperature	160 °C	320 °F

With a new, improved mechanical device with double connecting rod



LINEAR 120/280

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0680.00	1/2 Bsp F	1/2 Bsp F	1224	43,17	1	
30.0680.50	1/2 Npt F	1/2 Npt F	1224	43,17	1	✓

Max. flow rate	120 l/min	32 USGpm
Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Temperature	100 °C	210 °F



RF 120/280 - FOOT VALVE

P/N	Max. flow rate		Inlet	Outlet	Weight			
	l/min	USGpm			gr	oz		
30.5250.00	120	32	3/4 Bsp F	3/4 Bsp F	7499	264,5	1	
30.5250.50	120	32	3/4 Npt F	3/4" Npt F	7499	264,5	1	
Rated Pressure	280 bar - 28 MPa				4050 psi			
Permissible Pressure	310 bar - 31 MPa				4500 psi			
Rated Temperature	90 °C				195 °F			



RP 120/280 PNEUMATIC ON-OFF GUN

P/N	Max. flow rate		Inlet	Outlet	Weight			
	l/min	USGpm			gr	oz		
30.3230.00	120	32	3/4 Bsp F	3/4 Bsp F	2398	84,58	1	✓
Rated Pressure	280 bar - 28 MPa				4050 psi			
Permissible Pressure	310 bar - 31 MPa				4500 psi			
Rated Temperature	90 °C				195 °F			
Required air pressure	7 bar - 0,7 MPa				101 psi			
Compressed air fitting					1/4 Bsp F			



RL 36

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1530.00	3/8 Bsp F	1/4 Bsp F	565	20	15	✓
30.1530.30	3/8 Bsp M	1/4 Bsp F	555	19,6	15	✓
30.1530.50	3/8 Npt F	1/4 Npt F	565	20	15	✓
Rated Pressure	280 bar - 28 MPa		4000 psi			
Permissible Pressure	310 bar - 31 MPa		4500 psi			
Rated Flow	30 l/min		8 USGpm			
Rated Temperature	160 °C		320 °F			



RL 36 + SW 8

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1550.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	656	23,14	15	✓
Rated Pressure	280 bar - 28 MPa		4000 psi			
Permissible Pressure	310 bar - 31 MPa		4500 psi			
Rated Flow	30 l/min		8 USGpm			
Rated Temperature	160 °C		320 °F			





RL 22

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0400.00	3/8 Bsp F	1/4 Bsp F	475	16,8	20	✓
Rated Pressure		310 bar - 31 MPa			4500 psi	
Permissible Pressure		350 bar - 35 MPa			5000 psi	
Rated Flow		40 l/min			10,5 USGpm	
Rated Temperature		160 °C			320 °F	



RL 22 - HIGH TEMPERATURE-CERAMIC BALL- VITON SEALS

NEW

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0485.00	3/8 Bsp F	1/4 Bsp F	475	16,8	20	
With ceramic ball +or vit.- Suitable for chlore (30.0485.00)						
Rated Pressure		310 bar - 31 MPa			4500 psi	
Permissible Pressure		350 bar - 35 MPa			5000 psi	
Rated Flow		40 l/min			10,5 USGpm	
Rated Temperature		160 °C			320 °F	
Seals material					Viton	



RL 22 -HIGHT TEMPERATURE- QUICK COUPL.REINFORCED- VITON SEALS

NEW

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0490.00	3/8 Bsp M	AR 3/23 B M22 ex	650	23	10	
With ceramic ball +or vit.- Suitable for chlore (30.0485.00)						
Rated Pressure		310 bar - 31 MPa			4500 psi	
Permissible Pressure		350 bar - 35 MPa			5000 psi	
Rated Flow		40 l/min			10,5 USGpm	
Rated Temperature		160 °C			320 °F	
Seals material					Viton	
Extensions					40.2590.00	



RL 22 + SW8

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0420.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	574	20,25	20	✓
30.0420.12	+ sw.8 3/8 Bsp F	1/4 Bsp F	750	26,5	20	
Sw8 sst pin						
Rated Pressure		310 bar - 31 MPa			4500 psi	
Permissible Pressure		350 bar - 35 MPa			5000 psi	
Rated Flow		40 l/min			10,5 USGpm	
Rated Temperature		160 °C			320 °F	



LINEAR 3

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0620.00	3/8 Bsp F	1/4 Bsp F	596	21,02	20	✓
30.0620.50	3/8 Npt F	1/4 Npt F	596	21,02	20	✓
Rated Pressure			310 bar - 31 MPa		4500 psi	
Permissible Pressure			350 bar - 35 MPa		5000 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	



LINEAR 3 + SW6

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0640.00	+ sw.6 3/8 Bsp F	1/4 Bsp F	658	23,21	20	✓
Rated Pressure			310 bar - 31 MPa		4500 psi	
Permissible Pressure			350 bar - 35 MPa		5000 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	



RL 37

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1200.00	3/8 Bsp F	1/4 Bsp F	562	19,82	15	✓
30.1200.50	3/8 Npt F	1/4 Npt F	573	20,2	15	✓
30.1200.80	3/8 Bsp M	1/4 Bsp F	564	19,89	15	✓
Rated Pressure			310 bar - 31 MPa		4500 psi	
Permissible Pressure			350 bar - 35 MPa		5000 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	



RL 37 + SW6/+ SW8

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1220.00	+ sw.6 3/8 Bsp F	1/4 Bsp F	564	19,89	15	✓
30.1225.00	+ sw.8 3/8 Bsp M	1/4 Bsp F	648	22,86	15	✓
Rated Pressure			310 bar - 31 MPa		4500 psi	
Permissible Pressure			350 bar - 35 MPa		5000 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	



RL 37 + SW8-35 SWIVELLING IN- AND OUTLET

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1247.00	+ sw.8 3/8 Bsp F	+sw.35 1/4 Bsp F	711	25,08	15	✓
Rated Pressure			310 bar - 31 MPa		4500 psi	
Permissible Pressure			350 bar - 35 MPa		5000 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	





Spray guns up to 32 MPa -4550 psi

RL 30 **NEW**

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2500.00	3/8 Bsp F	1/4 Bsp F	614	21,65	20	✓
30.2500.30	3/8 Bsp M	1/4 Bsp F	620	21,9	20	✓
30.2500.20	A M22	1/4 Bsp F	622	21,94	20	✓
30.2500.25	A M22	A M22	629	22,19	20	✓
30.2500.28	3/8 Bsp F	A M22	740	26	20	
30.2500.50	3/8 Npt F	1/4 Npt F	614	21,65	20	✓
30.2515.00	3/8 Bsp F	1/4 Bsp F	740	26	20	
With ceramic ball - Suitable for chlore (30.2515.00)						
30.2515.50	3/8 Npt F	1/4 Npt F	613	21,62	20	
With ceramic ball - Suitable for chlore (30.2515.00-50)						

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



RL 30 + SW6

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2511.00	+ sw.6 3/8 Bsp F	1/4 Bsp F	676	24,04	20	✓
30.2511.20	+sw.6 A M22	1/4 Bsp F	678	23,91	20	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



VEGA

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2000.00	3/8 Bsp F	1/4 Bsp F	666	23,49	20	✓
30.2000.80	3/8 Bsp M	1/4 Bsp F	669	23,6	20	✓
30.2000.50	3/8 Npt F	1/4 Npt F	664	23,42	50	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



VEGA + SW8 **NEW**

P/N	Inlet	Outlet	Weight				
			gr	oz			
30.2030.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	750	26,5	20	✓	
30.2030.50	+ sw.8 3/8 Npt F	1/4 Npt F	750	26,5	20		✓
30.2030.12	+ sw.8 3/8 Bsp F	1/4 Bsp F	750	26,5	20	✓	
Sw8 sst pin							
30.2030.80	+ sw.8 3/8 Bsp M	1/4 Bsp F	747	26,35	20	✓	
30.2030.85	+ sw.8 3/8 Bsp M	1/4 Bsp F	747	26,35	20	✓	
Sw8 sst pin							
30.2035.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	744	26,24	20	✓	
Ceram.ball+sst.pin Sw8							

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



VEGA INOX **NEW**

P/N	Inlet	Outlet	Weight				
			gr	oz			
30.3150.00	3/8 Bsp F	1/4 Bsp F	599	21,13	2	✓	
30.3150.50	3/8 Npt F	1/4 Npt F	598	21,09	2	✓	

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel 303	





RL 56

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.4500.10	3/8 Bsp F	1/4 Bsp F	672	23,7	8	✓
30.4500.60	3/8 Npt F	1/4 Npt F	672	23,7	8	✓
30.4520.10	+ sw. 3/8 Bsp F	1/4 Bsp F	762	26,87	8	✓

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F

With a new, improved mechanical device with double connecting rod



NOVA 400 INOX STAINLESS STEEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5650.00	3/8 Bsp F	1/4 Bsp F	601	21,2	2	✓
30.5650.50	3/8 Npt F	1/4 Npt F	601	21,2	2	✓
30.5665.00	+ sw.25 3/8 Bsp F	1/4 Bsp F	710	25	2	

Rated Pressure	400 bar - 40 MPa	5800 psi
Permissible Pressure	440 bar - 44 MPa	6400 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel 303	



RL57 SST GUN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.4700.00	3/8 Bsp F	1/4 Bsp F	714	25,18	1	✓
30.4700.50	3/8 Npt F	1/4 Npt F	716	25,25	1	✓
30.4720.00	+ sw.25 3/8 Bsp F	1/4 Bsp F	817	28,81	1	

Rated Pressure	500 bar - 50 MPa	7250 psi
Permissible Pressure	560 bar - 56 MPa	8100 psi
Rated Flow	28 l/min	7,5 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel 303	



RP 80/500- PNEUMATIC ON-OFF GUN

P/N	Max. flow rate		Inlet	Outlet	Weight			
	l/min	USGpm			gr	oz		
30.3250.00	80	21	1/2 Bsp F	1/2 Bsp F	2657	93,71	1	✓


Rated Pressure	500 bar - 50 MPa	7250 psi
Permissible Pressure	560 bar - 56 MPa	8100 psi
Rated Temperature	90 °C	195 °F
Required air pressure	7 bar - 0,7 MPa	101 psi
Compressed air fitting		1/4 Bsp F



RF 80/500- SST FOOT ON-OFF GUN

P/N	Max. flow rate		Inlet	Outlet	Weight			
	l/min	USGpm			gr	oz		
30.5450.00	80	21	1/2 Bsp F	1/2 Bsp F	7593	267,81	1	
30.5450.50	80	21	1/2 Npt F	1/2 Npt F	7593	267,81	1	

Rated Pressure	500 bar - 50 MPa	7250 psi
Permissible Pressure	560 bar - 56 MPa	8100 psi
Rated Temperature	90 °C	195 °F

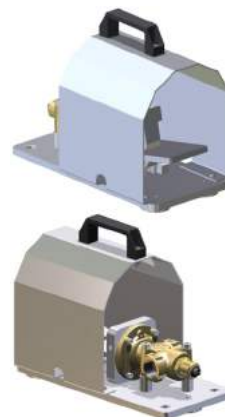

RL 84

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5400.00	1/2 Bsp F	1/2 Bsp F	1394	49,17	1	✓

Rated Pressure	500 bar - 50 MPa	7250 psi
Permissible Pressure	560 bar - 56 MPa	8100 psi
Rated Flow	80 l/min	21 USGpm
Rated Temperature	100 °C	210 °F
Extensions	30.5000.40-80-92	





LANCE AND NOZZLE HOLDER FOR RL 84 - RL204

P/N	Length		Inlet	Outlet	Type	Weight			
	mm	in.				gr	oz		
30.5000.40	400	15,7	1/2 Bsp M	1/4 Npt F	A	830	29,27	1	✓
30.5000.80	800	31,5	1/2 Bsp M	1/4 Npt F	A	1427	50,33	1	✓
30.5000.92	1250	50	1/2 Bsp M	1/4 Npt F	A	2036	71,81	1	✓
30.5018.51			Nipple 1/2 Bsp M	1/4 Npt F	B	55	2	1	✓

Nozzle holder

Rated Pressure	500 bar - 50 MPa	7250 psi
Permissible Pressure	560 bar - 56 MPa	8100 psi
Rated Flow	200 l/min	53 USGpm
Rated Temperature	43 °C	109 °F
Material	Stainless steel	



RL600 SST GUN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5800.00	3/8 Bsp F	3/8 Bsp F	991	34,95	1	✓
30.5820.00	3/8 Bsp F	3/8 Bsp F	1039	36,65	1	

Magnetic reed switch I= 0,5 A - V=48V AC/DC - P = 10 VA - 2 m cable

Rated Pressure	600 bar - 60 MPa	8700 psi
Permissible Pressure	660 bar - 66 MPa	9500 psi
Rated Flow	60 l/min	15,8 USGpm
Rated Temperature	100 °C	210 °F
Degree of Protection	IPX3	
Protection Class	III	
Shoulder rest	30.5060.00	

Inlet swivel, n° 30.5840.00



SHOULDER REST

P/N	Length		Couplings	Weight			
	mm	in.		gr	oz		
30.5019.21	300	11,8	M18 x 1,5 mm M	310	10,9	1	
Suitable for RL80							
30.5060.00	300	11,8	1/4 Bsp M	219	7,72	1	✓
Suitable for RL600 - RL124 - RL204 - RL84							



RL1000 SST GUN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5900.00	3/8 Bsp F	3/8 Bsp F	1173	41,38	1	✓
30.5900.30	M24 x 1,5 M	9/16"-18 Unf	1180	41,63	1	
30.5900.50	3/8 Npt F	3/8 Npt F	1173	41,38	1	
30.5900.60	3/8 Npt F	9/16"-18 Unf	1180	41,63	1	

Rated Pressure	1000 bar - 100 MPa	14500 psi
Permissible Pressure	1100 bar - 110 MPa	16000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	100 °C	210 °F



RLW 40 DUMP GUN

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.3000.50	400	15,74	3/8 Npt F	1/8 Npt F	948	33,44	20	
30.3100.50	1000	39,4	3/8 Npt F	1/8 Npt F	1362	48,04	10	✓

Rated Pressure	190 bar - 19 MPa	2750 psi
Permissible Pressure	210 bar - 21 MPa	3050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	60 °C	140 °F

High/low pressure gun with coaxial dual barrel



RL 35 SL - SPRAY GUN WITHOUT TRIGGER

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2100.00	3/8 Bsp F	1/4 Bsp F	372	13,12	15	✓
30.2120.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	357	12,6	15	✓

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	35 l/min	9,2 USGpm
Rated Temperature	160 °C	320 °F



RL26 - WEEP GUN - BLUE SAFETY LATCH

P/N	Inlet	Outlet	Weep. flow rate		Weight			
			l/min	USGpm	gr	oz		
30.1790.00	3/8 Bsp M	1/4 Bsp F	1,1	0,30	396	13,97	20	✓
30.1790.50	1/4 Npt F	3/8 Npt F	1,1	0,3	400	14,11	20	✓
30.1792.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	1,1	0,30	488	17,21	20	✓
30.1795.00	3/8 Bsp M	1/4 Bsp F	0,6	0,16	380	13,3	20	
30.1794.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	0,6	0,16	485	17,11	20	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



VEGA - WEEP GUN - BLUE SAFETY LATCH

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2055.00	3/8 Bsp F	1/4 Bsp F	664	23,42	20	✓
30.2055.50	3/8 Npt F	1/4 Npt F	668	23,56	20	✓
30.2064.00	+ sw.8 3/8 Bsp F	1/4 Bsp F	750	26,5	20	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5100 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F





RL26 +SW6 - LOW PRESS.WEEP GUN - SAFETY LATCH, GREEN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1780.00	3/8 Bsp F	1/4 Bsp F	400	14,11	20	✓
30.1782.00	+ sw.6 3/8 Bsp F	1/4 Bsp F	478	16,86	20	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F

Not weeping at high pressure



RL37 + SW8-35 - LOW PRESS.WEEP GUN - SAFETY LATCH, GREEN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1249.00	+ sw.8 3/8 Bsp F	+sw.35 1/4 Bsp F	711	25,08	15	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Not weeping at high pressure



RL30 + SW6 - LOW PRESS.WEEP GUN - SAFETY LATCH, GREEN

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2580.05	3/8 Bsp F	1/4 Bsp F	614	21,66	20	✓
30.2625.05	+ sw.6 3/8 Bsp F	1/4 Bsp F	677	23,88	20	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Not weeping at high pressure



RL 34 + SW GUN +ARS- B- BALL QUICK COUPLING

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2940.00	+ sw. 1/2 Bsp F	ARS350 B	726	25,2	2	
Inlet with swivel						
30.2960.00	+ sw. 1/2 Bsp F	ARS 178 B	710	25,04	2	
Inlet with swivel						
30.2980.00	+ sw. 1/2 Bsp F	ARS 25 B	790	27,86	2	
Inlet with swivel						
Rated Pressure	125 bar - 12,5 MPa		1850 psi			
Permissible Pressure	140 bar - 14 MPa		2000 psi			
Rated Flow	80 l/min		21 USGpm			
Rated Temperature	160 °C		320 °F			
Material	Brass					



RL 82 +SW GUN +ARS- B- BALL QUICK COUPLING

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.2840.00	+ sw. 1/2 Bsp F	ARS350 B	704	24,83	2	
Inlet with swivel						
30.2860.00	+ sw. 1/2 Bsp F	ARS 178 B	697	24,58	2	
Inlet with swivel						
30.2880.00	+ sw. 1/2 Bsp F	ARS 25 B	774	27,3	2	
Inlet with swivel						
Rated Pressure	125 bar - 12,5 MPa		1850 psi			
Permissible Pressure	140 bar - 14 MPa		2000 psi			
Rated Flow	80 l/min		21 USGpm			
Rated Temperature	160 °C		320 °F			
Material	Stainless steel					



RL 16 + PL4+ M27 M

P/N	Inlet	Outlet	Hand Grip	Weight			
				gr	oz		
30.0450.00	1/4 Bsp F	M 27 M	PL 4	588	20,74	20	
Rated Pressure	160 bar - 16 MPa			2350 psi			
Permissible Pressure	175 bar - 17,5 MPa			2550 psi			
Rated Flow	30 l/min			8 USGpm			
Rated Temperature	60 °C			140 °F			



RL 160 + S4/R5 + M22

P/N	Inlet	Outlet	Hand Grip	Weight			
				gr	oz		
30.0050.40	1/4 Bsp M	AR1 B M22	S4	581	20,49	25	
30.0050.20	1/4 Bsp F	AR1 B M22	S4	586	20,67	25	
30.0050.00	3/8 Bsp F	AR1 B M22	S4	592	20,88	25	✓
30.0260.00	1/4 Bsp F	AR1 B M22	R5	590	20,81	10	
Rated Pressure	160 bar - 16 MPa			2300 psi			
Permissible Pressure	175 bar - 17,5 MPa			2550 psi			
Rated Flow	30 l/min			8 USGpm			
Rated Temperature	100 °C			210 °F			





Spray guns with lance hand grip/quick coupling

RL 11 + S1+ AR6 M22

P/N	Inlet	Outlet	Hand Grip	Weight		
				gr	oz	
30.0940.00	3/8 Bsp F	AR1 B M22	S1	788	27,79	20
30.0940.40	1/4 Bsp M	AR1 B M22	S1	778	27,44	20

Rated Pressure	160 bar - 16 MPa	2300 psi
Permissible Pressure	175 bar - 17,5 MPa	2550 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	100 °C	210 °F



RL 200 + S4 + M22

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.0150.30	1/4 Bsp M	AR1 B M22	550	19,2	25	
30.0150.60	3/8 Bsp M	AR1 B M22	594	20,95	25	✓
30.0150.00	3/8 Bsp F	AR1 B M22	598	21,09	25	✓
30.0150.40	A M22	AR1 B M22	609	21,48	25	

Rated Pressure	200 bar - 20 MPa	2900 psi
Permissible Pressure	220 bar - 22 MPa	3200 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL 36 + S3 + M22

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1600.00	3/8 Bsp M	AR5/4 B M22	946	33,36	25	
30.1611.00	+ sw.8 3/8 Bsp F	AR5/4 B M22	1052	37,1	15	

Technical Data: RL35 - RL36



RL 26 + S4 + M22

P/N	Inlet	Outlet	Hand Grip	Weight			
				gr	oz		
30.0761.00	3/8 Bsp M	AR1 B M22	S4	730	25,7	20	
30.0760.00	A M22	AR1 B M22	S4	746	26,31	20	
30.0755.00	3/8 Bsp M	AR4 B M22	S4	738	26,03	20	✓
30.0759.00	+ sw.6 3/8 Bsp F	AR4 B M22	S4	807	28,46	20	
30.0781.00	3/8 Bsp M	AR5/4 B M22	S3	744	26,24	20	

Technical Data: RL26



RL 26 + PL4 + AR4 B M22 EX

P/N	Inlet	Outlet	Weight		
			gr	oz	
30.0740.00	3/8 Bsp M	AR4 B M22	706	25,1	20



Technical Data : RL26



RL 37 + S7 + AR6 M22

P/N	Inlet	Outlet	Weight		
			gr	oz	
30.1280.00	3/8 Bsp F	AR6 B M22	886	31,25	15
30.1280.80	3/8 Bsp M	AR6 B M22	913	32,17	15
30.1281.00	+ sw.6 3/8 Bsp F	AR6 B M22	946	33,37	15 ✓
30.1291.00	+ sw.8 3/8 Bsp M	AR6 B M22	913	32,17	15 ✓



Rated Pressure 280 bar - 28 MPa 4050 psi
 Permissible Pressure 310 bar - 31 MPa 4500 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 160 °C 320 °F

Technical Data : RL37



RL 37 + R5-1000MM+ ARSU

P/N	Inlet	Hose length		Outlet	Weight		
		m	yd		gr	oz	
30.1292.50	3/8 Npt F	1000	39,4	Arsu	1,242	43,81	15



Rated Pressure 280 bar - 28 MPa 4050 psi
 Permissible Pressure 310 bar - 31 MPa 4500 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 160 °C 320 °F

Technical Data : RL37



RL 300 - S3 370 MM + AR1/4 B M22 **NEW**

P/N	Tube type	Inlet	Outlet	Weight		
				gr	oz	
30.2608.11	Z.pl.steel	3/8 Bsp M	AR1/4 B M22	948	33,44	15 ✓
30.2608.30	Z.pl.steel	A M22	AR1/4 B M22	948	33,44	15 ✓
30.2616.00	Stainl. steel	+ sw.6 3/8 Bsp F	AR1/4 B M22	982	34,64	15



Technical Data : RL30





Spray guns with lance hand grip/quick coupling

RL 300 - S3 370 MM + AR5/4 B M22

P/N	Tube type	Inlet	Weight			
			gr	oz		
30.2600.11	Z.pl.steel	3/8 Bsp M	968	34,14	15	✓
30.2601.11	Z.pl.steel	3/8 Bsp F	964	34	15	✓
30.2607.11	Stainl. steel	+ sw.6 3/8 Bsp F	994	35,34	25	✓

Outlet

AR5/4 B M22

Technical Data : RL30



VEGA + RF1 + R5-300MM + AR5 B M22

P/N	Inlet	Outlet	Weight		
			gr	oz	
30.2070.00	3/8 Bsp F	AR5/4 B M22	1196	42,2	10

Lance with flow regulator - Technical Data: Vega



VEGA/RL30 + S3 370MM + AR5 B M22

P/N	Tube type	Inlet	Gun type	Weight			
				gr	oz		
30.2091.00	Stainl. steel	3/8 Bsp F	Vega	1030	36,33	15	
30.2097.00	Z.pl.steel	3/8 Bsp F	Vega	1050	37,03	25	✓
30.2098.00	Z.pl.steel	3/8 Bsp M	Vega	1069	38	25	✓
30.2083.00	Stainl. steel	+ sw.8 3/8 Bsp M	Vega	1112	39,22	25	✓
30.3091.60	Stainl. steel	A M22	RL 30	984	34,71	25	

Outlet

AR5/4 B M22

Technical Data : Vega



RL 51 GUN + ARS 23 - B BALL QUICK COUPLING

P/N	Inlet	Outlet	Weight		
			gr	oz	
30.4140.23	+ sw. 3/8 Bsp F	ARS 23 B	1000	35,27	10 ✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



RL 30 GUN + ARS 23 - B BALL QUICK COUPLING

P/N	Inlet	Outlet	Weight		
			gr	oz	
30.2540.30	3/8 Bsp F	ARS 23 B	880	31,1	4

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



SPRAY GUNS + ARS350 - B BALL QUICK COUPLING SST

P/N	Gun type	Inlet	Outlet	Weight			
				gr	oz		
30.2540.00	RL 30	A M22	ARS350 B	760	26,8	8	
30.2040.00	Vega	+ sw.8 3/8 Bsp F	ARS350 B	887	31,29	8	

With ceramic ball - Suitable for chlore - Sw8 with sst. pin. (30.2040.00)

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



RL 36 GUN +ARS25- B-KW BALL QUICK COUPLING

P/N	Inlet	Outlet	Mat.	Type	Weight			
					gr	oz		
30.1535.00	A M22	ARS 25 B	St. steel	Y	900	32	2	
30.1538.00	+sw.6 A M22	ARS 25 B	St. steel	Y	900	32	2	✓

Rated Pressure	280 bar - 28 MPa	4000 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F
Material		Brass



RL 30 GUN +ARS25- B-KW BALL QUICK COUPLING

P/N	Inlet	Outlet	Mat.	Type	Weight			
					gr	oz		
30.2540.60	3/8 Bsp F	ARS 25 B	Brass	X	900	32	4	✓
30.2619.00	A M22	ARS 25 B	Brass	Y	830	29,27	15	

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



SST VEGA GUN +ARS25- B-KW BALL QUICK COUPLING **NEW**

P/N	Inlet	Outlet	Mat.	Weight			
				gr	oz		
30.3140.60	3/8 Bsp F	ARS 25 B	St. steel	805	28,39	1	

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Material		Stainless steel 303





Spray guns with lance hand grip/quick coupling

RL 56 + SW + AR8 + S3 350 LANCE

P/N	Length		Inlet	Outlet	Weight		
	mm	in.			gr	oz	
30.4520.15	-	-	+ sw. 3/8 Bsp F	AR 8 B M24	816	28,78	8 ✓
40.0262.00	1050	41,3	AR8 "A"	1/4 Npt F	898	31,67	8 ✓
40.0262.50	1050	41,3	AR8 "A"	1/8 Npt F	897	31,64	8

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL600SST. AI303 - LANCE 140 MM +AR9 'B' -M24

P/N	Inlet	Outlet	Length		Weight		
			mm	in.	gr	oz	
30.5830.00	3/8 Bsp F	AR9 'B' -M24	140	5,50	1282	45,22	1

Rated Pressure	600 bar - 60 MPa	8700 psi
Permissible Pressure	660 bar - 66 MPa	9500 psi
Rated Flow	60 l/min	15,8 USGpm
Rated Temperature	100 °C	210 °F
Material		Stainless steel 303
Shoulder rest		30.5060.00



GUN RL11 WITH LANCE- S1- 700MM+ PROTECTION+NOZZLE HOLDER

P/N	Inlet	Length		Hand Grip	Outlet	Weight		
		mm	in.			gr	oz	
30.0970.00	3/8 Bsp F	700	27,5	S1	1/4 Npt F	916	32,31	20
Rated Pressure		160 bar - 16 MPa			2300 psi			
Permissible Pressure		175 bar - 17,5 MPa			2550 psi			
Rated Flow		30 l/min			8 USGpm			
Rated Temperature		100 °C			210 °F			



GV 5 -VARIABLE ANGLE JET LANCE + SP.GUN **NEW**

P/N	Inlet	Nozzle Size	Nozzle	Gun type	Weight		
			mm		gr	oz	
30.0885.10	3/8 Bsp F	03	1,0	RL 11	2000	69,8	5
30.1587.20	+ sw. 3/8 Bsp F	12	2,0	RL 36	2219,5	78,3	5
Swivel with sst. pin							
30.1585.20	3/8 Bsp F	12	2,0	RL 36	2129,2	74,3	5
30.4145.30	3/8 Bsp F	25	3,0	RL 51	2249,2	79	5



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Temperature	90 °C	195 °F
Tube type		Stainl. steel

GV 10 -VARIABLE ANGLE JET LANCE + SP.GUN **NEW**

P/N	Inlet	Nozzle Size	Nozzle	Gun type	Weight		
			mm		gr	oz	
30.2930.35	+ sw. 1/2 Bsp F	35	3,7	RL34-sw 1/2 Bsp F	2658,2	93,77	5
30.5382.50	1/2 Bsp F	50	4,4	RL124	3293,2	116,16	5



Rated Pressure	210 bar - 21 MPa	3060 psi
Permissible Pressure	230 bar - 23 MPa	3360 psi
Rated Temperature	43 °C	110 °F
Tube type	Stainl. steel	

GV 3 + RB65 SPRAY GUN

P/N	Length		Inlet	Nozzle	Gun type	Weight		
	mm	in.				gr	oz	
30.6485.70	768	30,22	1/2 Bsp F	7,0	RB65 100l/min	2072	73,08	5



Rated Pressure		24 bar - 2,4 MPa		350 psi	
Rated Flow		60 l/min		16 USGpm	
Rated Temperature		60 °C		140 °F	



RL300 +SW8 3/8BSP +LD12 - FOAM LANCE +AD+PROTEC.

P/N	Max. flow rate		Nozzle	Col.	Outlet	Weight			
	l/min	USGpm				gr	oz		
30.2710.18	10	2,6	1,8	Black	1/4 Npt F	1456	51,35	2	
With ceramic ball-Sw8 pin sst.									
30.2710.21	15	4	2,1	Red	1/4 Npt F	1456	51,35	2	
With ceramic ball-Sw8 pin sst.									

Rated Pressure	200 bar - 20 MPa	2900 psi
Permissible Pressure	220 bar - 22 MPa	3200 psi
Rated Flow	25 l/min	6,5 USGpm
Rated Temperature	38 °C	100 °F
Inlet	+ sw.8 3/8 Bsp M	
Injector	21.0600.12-14-18	

Injector 21.0600.12 is compulsory for foam lance LS12 30.2710.18
 Injector 21.0600.14 is compulsory for foam lance LS12 30.2710.21



RL26 GUN 1/4F BSP+CERAM.BALL+700MM SST LANCE

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.1757.00	1/4 Bsp F	1/4 Npt F	772	27,23	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F
Length	700 mm	27,5 in.
Tube type	1/4 Sst.	
Gun type	RL 26 1/4Bsp F+ceram.ball	

Wear to chemical detergent



GUN RL26+SW8 WITH LANCE- EVER WEEPING

P/N	Inlet	Length		Weep. flow rate		Weight			
		mm	in.	l/min	USGpm	gr	oz		
30.0767.00	+ sw.8 3/8 Bsp F	700	27,5	1,1	0,30	962	33,93	10	✓
30.0767.06	+ sw.8 3/8 Bsp F	700	27,5	0,6	0,16	966	34,07	10	✓
30.0768.00	+ sw.8 3/8 Bsp F	900	35,4	1,1	0,30	1058	37,32	10	
30.0768.06	+ sw.8 3/8 Bsp F	900	35,4	0,6	0,16	1058	37,32	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F
Outlet	1/4 Npt F	



RL26 + SW6 LOW PRESSURE WEEP GUN +R5-700 SST LANCE

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
30.1796.00	+ sw.6 3/8 Bsp F	700	27,5	1/4 Npt F	958	33,79	10	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F

Not weeping at high pressure



RL37 + SW8-35 - LOW PRESSURE WEEP GUN +R5 SST LANCE

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
30.1307.10	+ sw.8 3/8 Bsp F	700	27.5	1/4 Bsp M	1165	41,09	10	✓
Rated Pressure		280 bar - 28 MPa		4050 psi				
Permissible Pressure		310 bar - 31 MPa		4500 psi				
Rated Flow		40 l/min		10,5 USGpm				
Rated Temperature		160 °C		320 °F				

Not weeping at high pressure



RL300 +SW8 3/8BSP -R5 +LD12 - FOAM LANCE +AD+PROTEC.

P/N	Max. flow rate		Nozzle	Col.	Outlet	Weight			
	l/min	USGpm				gr	oz		
30.2700.18	10	2,6	1,8	Black	1/4 Npt F	1684	59,4	2	
With ceramic ball + Sw8 pin sst.									
30.2700.21	15	4	2,1	Red	1/4 Npt F	1687	59,5	2	
With ceramic ball.Sw8 pin sst.									

Rated Pressure		200 bar - 20 MPa		2900 psi				
Permissible Pressure		220 bar - 22 MPa		3200 psi				
Rated Flow		25 l/min		6,5 USGpm				
Rated Temperature		60 °C		140 °F				
Inlet				+ sw.8 3/8 Bsp M				
Injector				21.0600.12-14-18				

Injector 21.0600.12 is compulsory for foam lance LS12 30.2700.18

Injector 21.0600.14 is compulsory for foam lance LS12 30.2700.21



RL37 + SW8-35 +SST R5 +PROTECTION+NOZZLE HOLDER

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
30.1262.10	+ sw.8 3/8 Bsp F	1200	47,2	1/4 Npt F	1394	49,17	10	
Rated Pressure		280 bar - 28 MPa		4050 psi				
Permissible Pressure		310 bar - 31 MPa		4500 psi				
Rated Flow		40 l/min		10,5 USGpm				
Rated Temperature		160 °C		320 °F				



RL 30 - S3 500 MM -1/4 F NPT

P/N	Length		Tube type	Weight			
	mm	in.		gr	oz		
30.2610.11	500	19,7	1/4 Sst.	1002	35,34	20	✓
Inlet				3/8 Bsp F			
Outlet				1/4 Npt F			

Technical Data : RL30





Spray guns with complete lance/nozzle adapter

RL 56 + AL-F 39MPa LANCE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.4560.00	800	31,5	3/8 Bsp F	1/4 Npt F	1244	43,88	8	
30.4561.00	1050	41,3	3/8 Bsp F	1/4 Npt F	1244	43,88	8	
30.4562.00	1200	47,24	3/8 Bsp F	1/4 Npt F	1450	51,3	8	

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL 56 + S3 350 LANCE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.4550.09	800	34	3/8 Bsp F	1/4 Npt F	1118	39,43	8	✓
30.4570.09	800	34	+ sw. 3/8 Bsp F	1/4 Npt F	1205	42,5	8	
30.4550.10	1050	41,3	3/8 Bsp F	1/4 Npt F	1350	47,62	8	
30.4550.60	1050	41,3	3/8 Npt F	1/4 Npt F	1356	47,83	8	✓
30.4550.12	1200	51	3/8 Bsp F	1/4 Npt F	1432	50,51	8	
30.4550.62	1200	51	3/8 Npt F	1/4 Npt F	1432	50,51	8	
30.4570.12	1200	51	+ sw. 3/8 Bsp F	1/4 Npt F	1486	52,41	8	✓

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	160 °C	320 °F



RL 57 +AF-L 55MPa LANCE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.4740.00	1050	41,3	3/8 Bsp F	1/4 Npt F	1592	56,15	2	✓
30.4742.00	1200	51	3/8 Bsp F	1/4 Npt F	1820	64,19	2	

Rated Pressure	500 bar - 50 MPa	7250 psi
Permissible Pressure	550 bar - 55 MPa	8000 psi
Rated Flow	28 l/min	7,5 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel 303	



RL 57 +S3 50MPa LANCE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
30.4730.00	1050	41,3	3/8 Bsp F	1/4 Npt F	1720	60,67	2	✓
30.4730.50	1050	41,3	3/8 Npt F	1/4 Npt F	1720	60,67	2	
30.4732.00	1200	51	3/8 Bsp F	1/4 Npt F	1820	64,19	2	✓
30.4732.50	1200	51	3/8 Npt F	1/4 Npt F	1820	64,19	2	

Rated Pressure	500 bar - 50 MPa	7250 psi
Permissible Pressure	550 bar - 55 MPa	8000 psi
Rated Flow	28 l/min	7,5 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel 303	



RL600 STAINLESS STEEL GUN + S6 LANCE

P/N	Inlet	Outlet	Length		Weight			
			mm	in.	gr	oz		
30.5880.00	3/8 Bsp F	1/4 Npt F	800	31,5	2128	75,06	1	✓
Rated Pressure			600 bar - 60 MPa		8700 psi			
Permissible Pressure			660 bar - 66 MPa		9500 psi			
Rated Flow			60 l/min		15,8 USGpm			
Rated Temperature			100 °C		210 °F			
Degree of Protection					IPX3			
Protection Class					III			
Shoulder rest					30.5060.00			



R1000 STAINLESS STEEL GUN + LANCE 600 MM/ 1220 MM

NEW

P/N	Inlet	Outlet	Length		Weight			
			mm	in.	gr	oz		
30.5920.00	3/8 Bsp F	1/4 Npt F	640	25,2	3700	130,5	1	
30.5920.10	3/8 Bsp F	M 10	640	25,2	3700	130,5	1	
30.5920.20	3/8 Bsp F	1/8 Npt F	640	25,2	3700	130,5	1	
30.5920.60	M24 x 1,5 M	M 10	1220	48,4	4450	157	1	
30.5920.50	3/8 Npt F	1/4 Npt F	1220	48,4	4450	157	1	
30.5920.70	3/8 Npt F	1/8 Npt F	1220	48,4	4450	157	1	



Rated Pressure			1000 bar - 100 MPa		14500 psi			
Permissible Pressure			1100 bar - 110 MPa		16000 psi			
Rated Flow			40 l/min		10,5 USGpm			
Rated Temperature			100 °C		210 °F			



EXTENSION PL4 + SPECIAL NOZZLES+ M27 F

P/N	Length		Inlet	Outlet	Weight		
	mm	in.			gr	oz	
41.1199.12	260	10,2	M 27 F	HL250-03	409	14,43	25
Rated Pressure	160 bar - 16 MPa				2350 psi		
Permissible Pressure	175 bar - 17,5 MPa				2550 psi		
Rated Flow	30 l/min				8 USGpm		
Rated Temperature	60 °C				140 °F		



EXTENSION AR1 A M22 + SPECIAL NOZZLES

P/N	Length		Outlet	Weight		 
	mm	in.		gr	oz	
41.1007.13	300	11,8	HL250-035	355	12,5	20
41.1002.00	500	19,7	TR1-1/4	423	14,92	50
41.1027.00	700	27,5	TR1-1/4	525	18,5	30 
Rated Pressure		250 bar - 25 MPa		3650 psi		
Permissible Pressure		280 bar - 28 MPa		4050 psi		
Rated Flow		40 l/min		10,5 USGpm		
Rated Temperature		90 °C		195 °F		
Inlet				AR1 A M22		



EXTENSION AR5 A M22 + SPECIAL NOZZLES

P/N	Length		Outlet	Weight		 
	mm	in.		gr	oz	
41.1018.13	500	19,7	HL250-035	470	16,58	10
41.1029.00	500	19,7	TR1-1/4	440	15,52	30
Rated Pressure		250 bar - 25 MPa			3650 psi	
Permissible Pressure		280 bar - 28 MPa			4050 psi	
Rated Flow		40 l/min			10,5 USGpm	
Rated Temperature		90 °C			195 °F	
Inlet		AR5 A M22 2xO-rings				



EXTENSION PL4 + SPECIAL NOZZLES

P/N	Length		Inlet	Outlet	Weight		
	mm	in.			gr	oz	
41.2050.00	500	19,7	AR4 A M22 hex.	TR4- 1/4	693	24,44	30
41.2068.13	500	19,7	AR4 A M22 hex.	HL250-035	612	21,59	30
41.2066.13	500	19,7	AR5 A M22	HL250-035	594	20,95	30
41.2051.00	500	19,7	AR5 A M22	TR1-1/4	514	18,13	30
41.2053.00	500	19,7	AR5 A M22	TR4- 1/4	702	24,76	30
41.1028.00	700	27,5	AR5 A M22	TR1-1/4	632	22,29	30
Rated Pressure	250 bar - 25 MPa				3650 psi		
Permissible Pressure	280 bar - 28 MPa				4050 psi		
Rated Flow	40 l/min				10,5 USGpm		
Rated Temperature	90 °C				195 °F		



EXTENSION AR5 A M22 WITH NOZZLE HOLDER **NEW**

P/N	Length		Tube type	Outlet	Weight		
	mm	in.			gr	oz	
40.5146.00	500	19,7	Sst. - PL4	1/4 Npt F	406	14,32	30
40.5173.00	700	27,5	Sst. - PL4	1/4 Npt F	546	19,26	30 ✓
40.5173.50	700	27,5	Sst. - PL4	1/8 Npt F	546	19,26	30
40.5190.00	900	35,4	Sst. - PL4	1/4 Npt F	637	22,47	30 ✓
40.5150.00	500	19,7	Stainl. steel	1/4 Npt F	330	11,64	30 ✓
40.5151.00	700	25,7	Stainl. steel	1/4 Npt F	404	14,25	30
40.5145.00	500	19,7	Z.pl.steel	1/4 Npt F	368	12,98	30 ✓
40.5152.00	700	25,7	Z.pl.steel	1/4 Npt F	472	16,65	30 ✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet	AR5 A M22 2×O-rings	

PL4 version with tube plastic protection


EXTENSION S7K- AR6 A M22 WITH NOZZLE HOLDER

P/N	Length		Tube type	Outlet	Weight		
	mm	in.			gr	oz	
30.1255.00	500	19,7	Z.pl.steel -S7k	1/4 Npt F	401	14,14	25
30.1258.00	700	27,5	Z.pl.steel -S7k	1/4 Npt F	507	17,88	25

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet	AR6 A M22 1 OR	

With quick coupling plastic protection


EXTENSION S7- AR6 A M22 WITH NOZZLE HOLDER

P/N	Length		Tube type	Outlet	Weight		
	mm	in.			gr	oz	
30.1295.00	500	19,7	Z.pl.steel -S7	1/4 Npt F	474	16,7	25
30.1297.00	700	27,5	Z.pl.steel -S7	1/4 Npt F	578	20,39	25

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet	AR6 A M22 1 OR	

With S7 plastic grip


90° UNDERBODY LANCE EXTENSION WITH NOZZLE HOLDER

P/N	Length		Inlet	Outlet	Weight		
	mm	in.			gr	oz	
40.0058.00	700	27,5	AR1 A M22	1/4 Npt F	454	16,01	10 ✓
40.5176.50	700	27,5	AR5 A M22	1/8 Npt F	564	19,9	10
40.5191.00	900	35,4	AR5 A M22	1/4 Npt F	546	19,26	10 ✓

Supplied without hand grip nor nozzle

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder





EXTENSION AR5 A M22 WITH LD7 DOUBLE LANCE

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0685.00	500	19,7	1/8 Sst.	1/4 Npt F	700	24,7	10	✓
41.0697.00	700	27,5	1/8 Sst.	1/4 Npt F	811	28,6	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet	AR5 A M22 2×O-rings	



EXTENSION AR5 A M22 WITH LD9 DOUBLE LANCE

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0919.00	500	19,7	1/4 z.pl.	1/4 Npt F	1006	35,48	15	✓
41.0920.00	500	19,7	1/4 Sst.	1/4 Npt F	923	32,56	15	✓
41.0914.00	700	27,5	1/4 z.pl.	1/4 Npt F	1232	43,45	15	
41.0921.00	700	27,5	1/4 Sst.	1/4 Npt F	1100	38,9	15	✓
41.0911.00	700	27,5	1/8 Sst.	1/4 Npt F	900	31,8	15	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet	AR5 A M22 2×O-rings	



1/4 tube lances fitted with plastic protection

SST. EXTENSION AR4 WITH LD9 DOUBLE LANCE

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0928.00	500	19,7	1/4 Sst.	1/4 Npt F	917	32,34	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet	AR4 A M22 hex.	



SST. EXTENSION AR16 WITH LDM11 DOUBLE LANCE


P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0255.00	555	21,85	15mm Sst.	1/4 Npt F	780	27,51	10	
41.0275.00	755	29,72	15mm Sst.	1/4 Npt F	894	31,53	10	

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	25 l/min	6,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet	AR16 A M22 hex.	
Low pressure nozzle	40-30	



LANCER5+ARS -COLOR.ROUND GRIP - STAINLESS STEEL

P/N	Length		Inlet	Type	Nozzle type	Tube type	Weight		
	mm	in.					gr	oz	
40.2303.60	1000	39,4	ARS 25 "A" Kw	A	-	Straight	629	22,19	10
40.2306.60	1000	39,4	ARS 178 "A"	B	-	Straight	629	22,19	10
40.2360.51	600	23,6	ARS 178 "A"	D	25.40 sst	Bent	415	14,64	10



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Outlet		1/4 Npt F
Couplings		Stainless steel AISI303
Tube type		1/4 Sst.
Casing colour		Blue

Lances with tip protector and nozzle holder.
1/8 Npt F outlet available on request

R5 LANCE + ARS 23 - A BALL QUICK COUPLING

P/N	Length		Inlet	Outlet	Weight		
	mm	in.			gr	oz	
40.2272.73	700	27,5	ARS 23 "A"	1/8 Npt F	600	21,2	10
40.2290.23	995	39,2	ARS 23 "A"	1/4 Npt F	670	23,63	10



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Material		Stainless steel

R5 LANCE + ARS350 - A - BALL QUICK COUPLING

P/N	Length		Type	Outlet	Weight		
	mm	in.			gr	oz	
40.5609.10	600	23,6	Straight	1/4 Npt F	548	19,33	25
40.5709.00	700	27,5	Bent	1/4 Npt F	574	20,25	25
40.5909.00	900	35,4	Bent	1/4 Npt F	686	24,2	25



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Tube type		Stainl. steel
Inlet		ARS350 "A"

R5 LANCE + ARS25- A-KW - BALL QUICK COUPLING

P/N	Length		Type	Outlet	Weight		
	mm	in.			gr	oz	
40.5606.10	600	23,6	Straight	1/4 Npt F	518	18,27	25
40.5707.00	700	27,5	Bent	1/4 Npt F	576	20,32	25
40.5907.00	900	35,4	Bent	1/4 Npt F	670	23,63	10



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		ARS 25 "A" Kw
Material		Stainless steel
Hand Grip		R5-420 mm



LS 12 + ARS 23 A - FOAM LANCE + INJECTOR

P/N	Nozzle mm	Inlet	Weight		
			gr	oz	
25.1823.21	2,1	ARS 23 "A"	411	14,5	5
Rated Pressure			200 bar - 20 MPa		2900 psi
Permissible Pressure			220 bar - 22 MPa		3200 psi
Rated Flow			25 l/min		6,5 USGpm
Rated Temperature			60 °C		140 °F

Injector 21.0600.12, not included, is compulsory for foam lance LS12



LS 3 + ARS350 A - FOAM LANCE WITH TANK

P/N	Nozzle type	Nozzle	Inlet	Weight			
		mm		gr	oz		
25.1525.12	Vertical	1,25	ARS350 "A"	552	19,47	5	
Rated Pressure		160 bar - 16 MPa		2300 psi			
Permissible Pressure		180 bar - 18 MPa		2600 psi			
Rated Flow		20 l/min		5,3 USGpm			
Rated Temperature		60 °C		140 °F			
Tank		1 L		0,264 USg			



LS 3 + ARS25- A-KW - FOAM LANCE WITH TANK

P/N	Nozzle mm	Inlet	Weight		
			gr	oz	
25.1529.12	1,25	ARS 25 "A" Kw	564	19,89	5 ✓
Rated Pressure			160 bar - 16 MPa		2300 psi
Permissible Pressure			180 bar - 18 MPa		2600 psi
Rated Flow			20 l/min		5,3 USGpm
Rated Temperature			60 °C		140 °F
Nozzle type					Vertical
Tank			1 L		0,264 USg



LS 3 + "K" BAYONET COUPLING - FOAM LANCE WITH TANK

P/N	Nozzle mm	Inlet	Weight		
			gr	oz	
25.1527.12	1,25	"K" Bayonet coupling	587	20,7	6
Rated Pressure			160 bar - 16 MPa		2300 psi
Permissible Pressure			180 bar - 18 MPa		2600 psi
Rated Flow			20 l/min		5,3 USGpm
Rated Temperature			60 °C		140 °F
Nozzle type					Vertical
Tank			1 L		0,264 USg



GV 5 LANCE + ARS25- A-KW - BALL QUICK COUPLING

P/N	Length		Nozzle	Hand Grip	Inlet	Weight		
	mm	in.				gr	oz	
41.0185.11	768	30,22	1,0	LF 220	ARS 25 "A" Kw	966	34,07	10
Rated Pressure	250 bar - 25 MPa					3650 psi		
Permissible Pressure	280 bar - 28 MPa					4050 psi		
Rated Temperature	90 °C					195 °F		

GV 10 LANCE + ARS178 - BALL QUICK COUPLING **NEW**

P/N	Length		Nozzle Size	Nozzle	Inlet	Weight		
	mm	in.				gr	oz	
41.0188.35	956,3	37,65	35	3,7	ARS 178 "A"	1124	39,64	10
Rated Pressure	210 bar - 21 MPa					3060 psi		
Permissible Pressure	230 bar - 23 MPa					3360 psi		
Rated Flow	80 l/min					21 USGpm		
Rated Temperature	43 °C					110 °F		





LS11 - LANCE WITH INLET STRAINER - STAINLESS STEEL TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.0110.14	700	27,5	1/4 Bsp M	1/4 Npt F	508	17,92	8	✓
Rated Pressure		180 bar - 18 MPa		2600 psi				
Permissible Pressure		200 bar - 20 MPa		2900 psi				
Rated Flow		30 l/min		8 USGpm				
Rated Temperature		90 °C		195 °F				

Lances with tip protector and nozzle holder.
Suitable for car-wash



S3 - VENTED GRIP - ZINC-PLATED TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
40.0535.00	1/4 Bsp M	500	19,7	1/4 Npt F	456	16,08	20	✓
40.0755.00	1/4 Bsp M	700	27,5	1/4 Npt F	554	19,54	20	✓
40.0955.00	1/4 Bsp M	900	35,4	1/4 Npt F	655	23,1	20	✓
40.0955.08	1/4 Npt M	900	35,4	1/4 Npt F	590	20,81	20	
40.0955.50	1/4 Bsp M	900	35,4	1/8 Npt F	655	23,1	20	
40.1255.00	1/4 Bsp M	1200	47,2	1/4 Npt F	832	29,35	20	✓
40.1255.50	1/4 Bsp M	1200	47,2	1/8 Npt F	832	29,35	20	
40.1555.00	1/4 Bsp M	1500	59	1/4 Npt F	1085	38,27	10	✓
40.1555.50	1/4 Bsp M	1500	59	1/8 Npt F	1085	38,27	10	
40.1755.00	1/4 Bsp M	1700	66,9	1/4 Npt F	1224	43,17	10	✓
40.2055.00	1/4 Bsp M	2000	78,7	1/4 Npt F	1360	47,97	10	✓
40.2055.50	1/4 Bsp M	2000	78,7	1/8 Npt F	1360	47,97	10	

Rated Pressure 250 bar - 25 MPa 3650 psi
Permissible Pressure 280 bar - 28 MPa 4050 psi
Rated Flow 40 l/min 10,5 USGpm
Rated Temperature 160 °C 320 °F

Lances with tip protector and nozzle holder.
1/8Npt F outlet available on request.



S3 - VENTED GRIP - STAINLESS STEEL TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
40.0765.00	1/4 Bsp M	700	27,5	1/4 Npt F	488	17,21	20	✓
40.0965.00	1/4 Bsp M	900	35,4	1/4 Npt F	584	20,6	20	✓
40.0965.08	1/4 Npt M	900	35,4	1/4 Npt F	586	20,69	20	
40.1265.00	1/4 Bsp M	1200	47,2	1/4 Npt F	837	29,52	20	✓
40.1565.00	1/4 Bsp M	1500	59	1/4 Npt F	961	33,9	10	✓
40.1765.00	1/4 Bsp M	1700	66,9	1/4 Npt F	1039	36,65	10	✓
40.2065.00	1/4 Bsp M	2000	78,7	1/4 Npt F	1172	41,34	10	✓

Rated Pressure 250 bar - 25 MPa 3650 psi
Permissible Pressure 280 bar - 28 MPa 4050 psi
Rated Flow 40 l/min 10,5 USGpm
Rated Temperature 160 °C 320 °F

Lances with tip protector and nozzle holder.



S3 -350 VENTED GRIP - STAINLESS STEEL TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.0258.00	800	31,4	1/4 Bspt M	1/4 Npt F	564	19,89	8	✓
40.0258.50	800	31,4	1/4 Npt M	1/4 Npt F	562	19,82	8	
40.0261.00	1050	41,3	1/4 Bspt M	1/4 Npt F	801	28,25	8	✓
40.0261.50	1050	41,3	1/4 Npt M	1/4 Npt F	800	28,22	8	
40.0264.50	1200	47,2	1/4 Npt M	1/4 Npt F	850	29,98	8	✓
Rated Pressure			350 bar - 35 MPa		5100 psi			
Permissible Pressure			390 bar - 39 MPa		5650 psi			
Rated Flow			30 l/min		8 USGpm			
Rated Temperature			160 °C		320 °F			

Lances with tip protector and nozzle holder. Blue insulated grip.



S3 -55 MPA VENTED GRIP - STAINLESS STEEL TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.0240.00	1200	47,2	1/4 Bsp M	1/4 Npt F	1135	40,03	1	✓
Rated Pressure		500 bar - 50 MPa			7250 psi			
Permissible Pressure		550 bar - 55 MPa			8000 psi			
Rated Flow		40 l/min			10,5 USGpm			
Rated Temperature		160 °C			320 °F			
Material		Stainless steel						

Lances with tip protector and nozzle holder. Red insulated grip.



S6- VENTED GRIP - STAINLESS STEEL TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.0160.12	1200	47,3	3/8 Bsp M	1/4 Npt F	1763	62,18	1	✓
40.0160.80	800	31,5	3/8 Bsp M	1/4 Npt F	1174	41,41	1	✓
Rated Pressure			600 bar - 60 MPa		8700 psi			
Permissible Pressure			660 bar - 66 MPa		9500 psi			
Rated Flow			60 l/min		15,8 USGpm			
Rated Temperature			100 °C		210 °F			

Lances with nozzle holder.



SIDE GRIP FOR LANCE S3

P/N	Outlet	Weight			
		gr	oz		
41.0795.00	M 10	82	2,89	25	✓





S7 - RECTANGULAR GRIP - ZINC-PLATED TUBE

P/N	Length		Outlet	Weight			
	mm	in.		gr	oz		
40.4500.00	500	19,7	1/4 Npt F	464	16,37	20	✓
40.4700.00	700	27,5	1/4 Npt F	564	19,9	20	
40.4900.00	900	35,4	1/4 Npt F	658	23,21	20	

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M

Lances with tip protector and nozzle holder.
1/8Npt F outlet available on request.



LANCE R5 - ROUND GRIP - ZINC PLATED TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
40.2150.00	1/4 Bsp M	500	19,7	1/4 Npt F	440	15,52	25	✓
40.5500.05	1/4 Npt M	500	19,7	1/4 Npt F	440	15,52	25	
40.5600.05	1/4 Npt M	600	23,62	1/4 Npt F	440	15,52	25	
40.2170.00	1/4 Bsp M	700	27,5	1/4 Npt F	592	20,88	25	✓
40.5700.05	1/4 Npt M	700	27,5	1/4 Npt F	592	20,88	25	
40.2190.00	1/4 Bsp M	900	35,4	1/4 Npt F	692	24,41	25	✓
40.5900.05	1/4 Npt M	900	35,4	1/4 Npt F	670	23,6	25	
40.2220.00	1/4 Bsp M	1200	47,2	1/4 Npt F	842	29,69	25	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.
1/8Npt F outlet available on request.



LANCE R5 - ROUND GRIP - STAINLESS STEEL TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
40.5502.05	1/4 Npt M	500	20,41	1/4 Npt F	521	18,38	25	
40.5705.00	1/4 Bsp M	700	27,5	1/4 Npt F	521	18,38	25	✓
40.5705.05	1/4 Npt M	700	27,5	1/4 Npt F	532	18,76	25	
40.5905.00	1/4 Bsp M	900	35,4	1/4 Npt F	600	21,16	25	✓
40.5905.05	1/4 Npt M	900	35,4	1/4 Npt F	628	22,15	25	
40.5905.50	1/4 Bsp M	900	35,4	1/8 Npt F	600	21,16	25	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.
1/8 Npt F outlet available on request



LANCE R5 - ROUND GRIP - STAINLESS STEEL

P/N	Length		Casing colour	Outlet	Weight			
	mm	in.			gr	oz		
40.2160.00	500	19,7	Black	1/4 Npt F	414	14,6	10	✓
40.2160.30	500	19,7	Red	1/4 Npt F	408	14,39	10	✓
40.2160.60	500	19,7	Blue	1/4 Npt F	398	14,04	10	✓
40.2300.00	1000	39,4	Black	1/4 Npt F	620	21,87	10	
40.2300.30	1000	39,4	Red	1/4 Npt F	611	21,55	10	
40.2300.60	1000	39,4	Blue	1/4 Npt F	608	21,44	10	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M
Couplings		Stainless steel Ai303
Tube type		1/4 Sst.
Type		Straight

Lances with tip protector and nozzle holder.
1/8 Npt F outlet available on request



LANCE ML - ROUND GRIP - ZINC PLATED TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
40.6200.00	1/4 Bsp M	1200	47,24	1/4 Npt F	982	34,63	25	
40.6200.05	1/4 Npt M	1200	47,24	1/4 Npt F	982	34,63	25	
40.6500.00	1/4 Bsp M	1500	59	1/4 Npt F	1211	42,71	10	
40.6500.05	1/4 Npt M	1500	59	1/4 Npt F	1207	42,57	10	
40.6700.00	1/4 Bsp M	1700	66,9	1/4 Npt F	1354	47,76	10	
40.6700.05	1/4 Npt M	1700	66,9	1/4 Npt F	1380	48,6	10	
40.7000.00	1/4 Bsp M	2000	78,5	1/4 Npt F	1455	51,32	10	
40.7000.05	1/4 Npt M	2000	78,5	1/4 Npt F	1455	51,32	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.



LANCE ML - ROUND GRIP - STAINLESS STEEL TUBE **NEW**

P/N	Inlet	Length		Outlet	Weight			
		mm	in.		gr	oz		
40.6205.00	1/4 Bsp M	1200	47,2	1/4 Npt F	872	30,76	25	✓
40.6205.05	1/4 Npt M	1200	47,2	1/4 Npt F	872	30,76	25	
40.6505.00	1/4 Bsp M	1500	59	1/4 Npt F	1080	38,09	10	✓
40.6705.00	1/4 Bsp M	1700	66,9	1/4 Npt F	1300	45,8	10	
40.7005.00	1/4 Bsp M	2000	78,7	1/4 Npt F	1295	45,68	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.





LANCE PFL - MOULDED GRIP - ZINC-PLATED TUBE **NEW**

P/N	Length		Type	Outlet	Weight			
	mm	in.			gr	oz		
40.7500.00	500	19,8	Bent	1/4 Npt F	390	13,76	25	✓
40.7502.00	500	19,8	Straight	1/4 Npt F	398	14,04	25	
40.7700.00	700	27,5	Bent	1/4 Npt F	488	17,21	25	✓
40.7700.50	700	27,5	Bent	1/8 Npt F	488	17,21	25	
40.7900.00	900	35,4	Bent	1/4 Npt F	599	21,13	25	✓
40.7900.50	900	35,4	Bent	1/8 Npt F	599	21,13	25	
40.8200.00	1200	47,2	Bent	1/4 Npt F	853	30,09	25	✓
40.8500.00	1500	59	Bent	1/4 Npt F	1024	36,12	10	✓
40.8700.00	1700	66,9	Bent	1/4 Npt F	1116	39,36	10	✓
40.9000.00	2000	78,7	Bent	1/4 Npt F	1319	46,52	10	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M

Lances with tip protector and nozzle holder.
Lances with outlet 1/8Npt F available on request.



LANCE PFL - MOULDED GRIP - SST TUBE

P/N	Length		Type	Outlet	Weight			
	mm	in.			gr	oz		
40.7518.00	500	19,8	Straight	1/4 Npt F	346	12,2	25	✓
40.7722.00	700	27,5	Bent	1/4 Npt F	434	15,31	25	✓
40.9025.00	900	35,4	Bent	1/4 Npt F	507	17,88	25	
40.8216.00	1200	47,2	Bent	1/4 Npt F	738	26,03	10	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M
Tube type		Stainl. steel

Lances with tip protector and nozzle holder.
Lances with outlet 1/8Npt F available on request.



LANCE PFL - STRAIGHT - ZINC-PLATED TUBE

P/N	Length		Hand Grip	Outlet	Weight			
	mm	in.			gr	oz		
40.7300.22	300	11,8	1-PFL	1/4 Bsp M	237	8,36	25	✓
40.7450.22	450	17,7	1-PFL	1/4 Bsp M	316	11,15	25	✓
40.7504.22	500	19,7	1-PFL	1/4 Bsp M	349	12,31	25	
40.7601.22	600	23,6	1-PFL	1/4 Bsp M	396	13,97	25	
40.7705.22	700	27,5	1-PFL	1/4 Bsp M	452	15,94	25	✓
40.7902.22	900	35,4	1-PFL	1/4 Bsp M	554	19,54	25	✓
40.8211.22	1200	47,2	2 -PFL	1/4 Bsp M	818	28,85	25	✓
40.8511.22	1500	59	2 -PFL	1/4 Bsp M	948	33,44	10	
40.9004.22	2000	78,7	3-PFL	1/4 Bsp M	1288	45,43	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M
Tube type		1/4 z.pl.



LANCE PFL - STRAIGHT - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Outlet	Weight			
	mm	in.			gr	oz		
40.7460.22	450	17,7	1-PFL	1/4 Bsp M	287	10,12	25	✓
40.7710.22	700	27,5	1-PFL	1/4 Bsp M	396	13,97	25	
40.8010.22	800	31,5	2 -PFL	1/4 Bsp M	670	23,7	1	
40.9010.22	900	35,4	1-PFL	1/4 Bsp M	479	16,89	25	✓
40.9015.22	900	35,4	2 -PFL	1/4 Bsp M	700	24,7	25	
40.8220.22	1200	47,2	1-PFL	1/4 Bsp M	588	20,74	10	
40.8215.22	1200	47,2	2 -PFL	1/4 Bsp M	684	24,13	25	✓
40.8512.22	1500	59	2 -PFL	1/4 Bsp M	819	28,89	10	

Rated Pressure 250 bar - 25 MPa 3650 psi
 Permissible Pressure 280 bar - 28 MPa 4050 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 160 °C 320 °F
 Inlet 1/4 Bsp M



LANCES PFL- BENT - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Outlet	Weight			
	mm	in.			gr	oz		
40.9016.22	900	35,4	2 -PFL	1/4 Bsp M	568	20,03	10	
40.8217.22	1200	47,2	2 -PFL	1/4 Bsp M	686	24,2	10	

Rated Pressure 250 bar - 25 MPa 3650 psi
 Permissible Pressure 280 bar - 28 MPa 4050 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 160 °C 320 °F
 Inlet 1/4 Bsp M



LANCE AL-F - MOULDED GRIP-STRaight - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Col.	Weight			
	mm	in.			gr	oz		
40.3500.22	500	19,7	AL-F 7,8 in	Gray	316	11,15	10	
40.3502.22	500	19,7	AL-F 7,8 in	Red	316	11,15	10	
40.3504.22	500	19,7	AL-F 7,8 in	Blue	316	11,15	10	✓
40.3900.22	1000	39,4	AL-F 12 in	Gray	568	20,03	10	
40.3902.22	1000	39,4	AL-F 12 in	Red	572	20,17	10	✓
40.3904.22	1000	39,4	AL-F 12 in	Blue	560	19,75	10	✓

Rated Pressure 250 bar - 25 MPa 3650 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 90 °C 194 °F
 Sterilization Temperature 125 °C 255 °F
 Tube type 1/4 Sst.
 Inlet 1/4 Bsp M
 Outlet 1/4 Bsp M



HANDLE AL-F 340 - MOULDED GRIP - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Col.	Weight			
	mm	in.			gr	oz		
40.3300.22	340	13,4	AL-F 12 in	Gray	300	10,6	10	
40.3302.22	340	13,4	AL-F 12 in	Red	300	10,6	10	
40.3304.22	340	13,4	AL-F 12 in	Blue	300	10,6	10	✓

Rated Pressure 250 bar - 25 MPa 3650 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 90 °C 194 °F
 Sterilization Temperature 125 °C 255 °F
 Tube type 1/4 Sst.
 Inlet 1/4 Bsp M
 Outlet 1/4 Bsp M





LANCE AL-F 39MPa - MOULDED GRIP-STRAIGHT - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Col.	Weight			
	mm	in.			gr	oz		
40.0231.22	800	31,5	AL-F 12 in	Blue	496	17,49	10	
40.0232.22	1050	41,34	AL-F 12 in	Blue	610	21,52	10	
40.0233.22	1200	47,24	AL-F 12 in	Blue	672	23,7	10	

Rated Pressure	390 bar - 39 MPa	5700 psi
Rated Flow	50 l/min	13 USGpm
Rated Temperature	90 °C	194 °F
Sterilization Temperature	125 °C	255 °F
Tube type	1/4 Sst.	
Inlet	1/4 Bsp M	
Outlet	1/4 Bsp M	



LANCE AL-F 55MPa - MOULDED GRIP-STRAIGHT - STAINLESS STEEL TUBE

P/N	Length		Hand Grip	Col.	Weight			
	mm	in.			gr	oz		
40.0221.22	1050	41,33	AL-F 12 in	Red	776	27,37	10	
40.0222.22	1200	47,24	AL-F 12 in	Red	820	28,92	10	

Rated Pressure	550 bar - 55 MPa	8000 psi
Rated Flow	50 l/min	13 USGpm
Rated Temperature	90 °C	194 °F
Sterilization Temperature	125 °C	255 °F
Tube type	1/4 Sst.	
Inlet	1/4 Bsp M	
Outlet	1/4 Bsp M	



LANCE AL-F - ZINC-PLATED TUBE **NEW**

P/N	Length		Couplings	Weight			
	mm	in.		gr	oz		
40.0200.22	220	8,7	1/4 Bsp MM	128	4,5	50	
40.0208.22	470	18,5	1/4 Bsp MM	274	9,66	50	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F



INSULATED HAND GRIP + TUBE -R5-S3

P/N	Length		Hand Grip	Tube type	Weight			
	mm	in.			gr	oz		
40.0370.00	380	15	S3	Z.pl.steel	384	13,54	30	✓
40.0371.00	380	15	S3	Stainl. steel	346	12,2	30	
40.5453.00	430	17	R5	Z.pl.steel	415	14,64	25	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet	1/4 Bsp M (R5) - 1/4 Bsp M (S3)	
Outlet	1/4 Bsp F (R5) - 1/4 Bsp F (S3)	



LANCE PL4 - ZINC-PLATED TUBE

P/N	Length		Outlet	Type	Weight		
	mm	in.			gr	oz	
40.0072.10	800	31,5	1/4 Bsp M	Straight	1	1	25
Rated Pressure	250 bar - 25 MPa				3650 psi		
Permissible Pressure	280 bar - 28 MPa				4050 psi		
Rated Flow	40 l/min				10,5 USGpm		
Rated Temperature	160 °C				320 °F		
Inlet					3/8 Bsp M		
Tube type					1/4 z.pl.		



INSULATED GRIP ML-R5-S3-S4 **NEW**

P/N	Length		Hand Grip	Casing colour	Couplings	Weight		
	mm	in.				gr	oz	
40.5016.23	192	7,5	ML	Black	Hex.19 × d.13 mm	100	3,53	20
40.5020.23	290	11,4	ML	Black	Hex.19 × d.13 mm	144	5,08	40
40.5022.23	400	15,7	ML	Black	Hex.19 × d.13 mm	191	6,74	40
40.5024.23	440	17,3	ML	Black	Hex.19 × d.13 mm	208	7,34	40
40.0041.84	292	11,5	R5	Black	Hex.19 × d.13 mm	107	3,77	5
40.0044.84	292	11,5	R5	Blue	Hex.19 × d.13 mm	107	3,77	5
40.0043.84	292	11,5	R5	Red	Hex.19 × d.13 mm	107	3,77	5
40.0042.84	420	16,5	R5	Black	Hex.19 × d.13 mm	159	5,61	5
40.9995.98	300	11,8	S4	Black	Hex.19 × d.13 mm	120	4,23	20
40.0300.00	360	12,7	S3	Black	Hex.19 × d.13 mm	129	4,55	30
40.0300.05	360	12,7	S3	Black	Hex.19 × d.13,9 mm	136	4,8	30



Rated Temperature 160 °C 320 °F

TIP PROTECTOR

P/N	Col.	Weight			
		gr	oz		
40.0020.00	Black	19	0,67	1	✓
40.0020.30	Red	18	0,63	10	✓
40.0020.60	Blue	18	0,63	10	✓
40.0020.80	Gray	19	0,67	10	✓

Couplings 40.0007.51-61





EXTENSION - ZINC-PLATED TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.5049.00	300	11,8	1/4 Bsp M	1/4 Npt F	197	6,95	50	
40.5060.00	500	19,7	1/4 Bsp M	1/4 Npt F	290	10,23	25	✓
40.5070.00	700	27,5	1/4 Bsp M	1/4 Npt F	405	14,2	30	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.



EXTENSION - STAINLESS STEEL TUBE

P/N	Length		Inlet	Outlet	Weight			
	mm	in.			gr	oz		
40.5069.00	500	19,7	1/4 Bsp M	1/4 Npt F	254	8,96	50	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Lances with tip protector and nozzle holder.



ZINC PLATED TUBE 1/4 BSP MM

P/N	Length		Outlet	Weight			
	mm	in.		gr	oz		
40.5056.66	200	7,9	1/4 Bsp M	96	3,39	100	
40.5050.66	300	11,8	1/4 Bsp M	160	5,6	50	✓
40.5033.66	400	15,7	1/4 Bsp M	198	6,98	25	
40.5055.66	500	19,7	1/4 Bsp M	246	8,68	50	
40.7602.66	600	23,6	1/4 Bsp M	298	10,51	100	
40.5702.66	700	27,5	1/4 Bsp M	364	12,84	25	
40.9421.66	800	31,5	1/4 Bsp M	430	15,2	25	
40.5902.66	900	35,4	1/4 Bsp M	450	15,87	25	
40.6008.66	1000	39,4	1/4 Bsp M	540	18,8	25	
40.8212.66	1200	47,2	1/4 Bsp M	590	20,81	25	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Inlet		1/4 Bsp M
Hose Ø	13 mm	0,511 in



ZINC PLATED TUBE 1/4 NPT MM

P/N	Length		Outlet	Weight			
	mm	in.		gr	oz		
40.0037.66	760	30	1/4 Npt M	400	14,1	25	
40.5904.66	900	35,4	1/4 Npt M	480	16,9	25	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Inlet		1/4 Npt M
Hose Ø	13 mm	0,511 in



STAINLESS STEEL TUBE 1/4 BSP MM

P/N	Length		Outlet	Weight			
	mm	in.		gr	oz		
41.0501.56	300	11,8	1/4 Bsp M	124	4,37	50	✓
40.5061.56	400	15,7	1/4 Bsp M	168	5,93	50	✓
40.0503.56	500	19,7	1/4 Bsp M	208	7,34	50	
40.7604.56	600	23,6	1/4 Bsp M	247	8,78	50	
40.7711.56	700	27,5	1/4 Bsp M	292	10,3	50	
40.8011.56	800	31,4	1/4 Bsp M	339	11,95	25	
40.9011.56	900	35,4	1/4 Bsp M	363	12,8	25	
40.6012.56	1000	39,9	1/4 Bsp M	422	14,88	25	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Inlet		1/4 Bsp M
Hose Ø	13 mm	0,511 in



STAINLESS STEEL TUBE 1/4 NPT MM

P/N	Length		Outlet	Weight			
	mm	in.		gr	oz		
40.0022.56	203	8	1/4 Npt M	83	2,9	200	
40.9014.56	400	15,7	1/4 Npt M	178	6,3	50	
40.8012.56	800	31,4	1/4 Npt M	322	11,4	25	
40.0024.56	1000	39,9	1/4 Npt M	417	14,7	25	
40.0023.56	1830	72	1/4 Npt M	770	27,16	25	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Inlet		1/4 Npt M
Hose Ø	13 mm	0,511 in





LD9 - WITH S3 VENTED GRIP

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0905.00	690	27	1/4 Sst.	1/4 Npt F	934	32,94	10	✓
41.0805.00	890	35	1/4 z.pl.	1/4 Npt F	1300	45,85	10	✓
41.0806.00	890	35	1/4 Sst.	1/4 Npt F	1183	41,73	10	✓
41.0800.00	1090	43	1/4 z.pl.	1/4 Npt F	1528	53,89	10	✓
41.0900.00	1090	43	1/4 Sst.	1/4 Npt F	1347	47,51	10	✓
41.0850.00	1090	43	1/8 Sst.	1/4 Npt F	1208	42,61	10	
41.0902.00	1600	63	1/4 Sst.	1/4 Npt F	1851	65,29	3	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Inlet		1/4 Bsp M



LD7/3 - WITH S3 VENTED GRIP

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0600.00	1070	42,1	1/8 Sst.	1/4 Npt F	1106	39	10	
41.0630.00	890	35	1/4 z.pl.	1/4 Npt F	1223	43,14	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Hand Grip		S3
Inlet		1/4 Bsp M

LD7 - WITH R5 ROUND GRIP **NEW**

P/N	Inlet	Length		Tube type	Weight			
		mm	in.		gr	oz		
41.0682.00	1/4 Bsp M	1050	41,3	1/4 z.pl. × 1/8 Sst.	1060	37,4	10	✓
41.0682.05	1/4 Npt M	1050	41,3	1/4 z.pl. × 1/8 Sst.	1060	37,4	20	
41.0684.00	1/4 Bsp M	850	33,4	1/4 z.pl. × 1/8 Sst.	948	33,44	10	✓
41.0684.05	1/4 Npt M	850	33,4	1/4 z.pl. × 1/8 Sst.	948	33,44	20	
41.0672.00	1/4 Bsp M	1050	41,3	1/4 × 1/8 Sst.	1037	36,58	10	✓
41.0672.05	1/4 Npt M	1050	41,3	1/4 × 1/8 Sst.	1037	36,58	20	
41.0674.00	1/4 Bsp M	850	33,4	1/4 × 1/8 Sst.	922	32,52	10	✓
41.0674.05	1/4 Npt M	850	33,4	1/4 × 1/8 Sst.	922	32,52	20	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Hand Grip		R5
Outlet		1/4 Npt F



LD - WITH VERTICAL VALVE

P/N	Hand Grip	Length		Tube type	Weight			
		mm	in.		gr	oz		
41.0330.00	1-PFL	850	33,4	1/4 z.pl.	1006	35,48	15	✓
41.0340.00	R5	1050	41,3	1/4 z.pl.	1026	36,19	10	
41.0880.00	LD9+S3+knob	1090	43	1/4 z.pl.	1578	55,66	10	✓
41.0881.00	LD9+S3+knob	1090	43	1/4 Sst.	1365	48,14	10	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Outlet		1/4 Npt F
Inlet		1/4 Bsp M



LD9 - FRONT SECTION

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0925.00	300	11,8	1/4 Sst.	1/4 Npt F	639	22,54	10	✓
Rated Pressure	250 bar - 25 MPa				3650 psi			
Permissible Pressure	280 bar - 28 MPa				4050 psi			
Rated Flow	40 l/min				10,5 USGpm			
Rated Temperature	160 °C				320 °F			
Inlet					1/4 Bsp F			



LD7 - FRONT SECTION

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0698.00	220	8,7	1/8 Sst.	1/4 Npt F	442	15,6	10	✓
41.0390.00	500	19,7	1/8 Sst.	1/4 Npt F	650	22,93	10	✓
Rated Pressure	250 bar - 25 MPa				3650 psi			
Permissible Pressure	280 bar - 28 MPa				4050 psi			
Rated Flow	40 l/min				10,5 USGpm			
Rated Temperature	160 °C				320 °F			
Inlet					1/4 Bsp F			



LD9SST. AI303 - FRONT SECTION

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0050.00	700	27,6	1/4 Sst.	1/4 Npt F	647	22,8	5	
Rated Pressure	250 bar - 25 MPa				3650 psi			
Permissible Pressure	280 bar - 28 MPa				4050 psi			
Rated Flow	40 l/min				10,5 USGpm			
Rated Temperature	160 °C				320 °F			
Material					Stainless steel 303			
Inlet					1/4 Bsp F			



LDM11 - COAXIAL BARREL - WITH S7 GRIP

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0295.00	887	34,92	Stainl. steel	1/4 Npt F	1080	38,1	10	
41.0315.00	1087	42,8	Stainl. steel	1/4 Npt F	1221	43,07	10	
Rated Pressure	280 bar - 28 MPa				4050 psi			
Permissible Pressure	310 bar - 31 MPa				4500 psi			
Rated Flow	25 l/min				6,5 USGpm			
Rated Temperature	160 °C				320 °F			
Inlet					1/4 Bsp M			
Low pressure nozzle					40-30			



LD60SST. AI303 - FRONT SECTION - M24

P/N	Length		Tube type	Outlet	Weight			
	mm	in.			gr	oz		
41.0000.00	500	19,7	1/4 Sst.	1/4 Npt F	1631	57,5	1	
41.0000.70	700	27,6	1/4 Sst.	1/4 Npt F	1951	68,81	1	
Rated Pressure	600 bar - 60 MPa				8700 psi			
Permissible Pressure	660 bar - 66 MPa				9500 psi			
Rated Flow	40 l/min				10,5 USGpm			
Rated Temperature	43 °C				109 °F			
Material					Stainless steel 303			
Inlet					AR9 'A' - M24			
Hand Grip					30.5830.00			





ADJUSTABLE ANGLE COUPLINGS LOW PRESSURE - ST. STEEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1600.00	1/4 Bsp M	1/4 Bsp F	136	4,8	10	✓
Rated Pressure		50 bar - 5 MPa		700 psi		
Rated Flow		40 l/min		10,5 USGpm		
Rated Temperature		90 °C		195 °F		
Material		Stainless steel 303				



ADJUSTABLE ANGLE COUPLINGS HIGH PRESSURE - ST. STEEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1700.00	1/4 Npt M	1/4 Npt F	94	3,32	10	✓
26.1700.15	1/4 Bsp M	1/4 Bsp F	94	3,32	10	✓
Rated Pressure		250 bar - 25 MPa		3650 psi		
Rated Flow		40 l/min		10,5 USGpm		
Rated Temperature		90 °C		195 °F		
Angle of rotation				60°		
Material		Stainless steel 303				



TD1 - DOUBLE NOZZLE HOLDER

P/N	Inlet	Outlet	Weight			
			gr	oz		
23.0000.00	1/4 Bsp F	2 × 1/4 Npt F	165	5,8	25	✓
23.0000.50	1/4 Bsp F	2 × 1/8 Npt F	174	6,14	25	✓
Rated Pressure			200 bar - 20 MPa		2900 psi	
Permissible Pressure			220 bar - 22 MPa		3200 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			90 °C		195 °F	



TD1P - DOUBLE NOZZLE HOLDER WITH KNOB

P/N	Inlet	Outlet	Weight			
			gr	oz		
23.0015.00	1/4 Bsp F	2 × 1/4 Npt F	194	6,84	25	✓
23.0015.50	1/4 Bsp F	2 × 1/8 Npt F	200	7	25	
Rated Pressure			200 bar - 20 MPa		2900 psi	
Permissible Pressure			220 bar - 22 MPa		3200 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			90 °C		195 °F	



TR1 - ADJUSTABLE NOZZLE HOLDER

P/N	Inlet	Outlet	Weight			
			gr	oz		
22.0000.00	1/4 Bsp F	1/4 Npt F	116	4,09	25	✓
22.0000.15	1/4 Bsp F	1/8 Npt F	122	4,3	25	✓
22.0000.05	1/4 Npt F	1/4 Npt F	115	4,06	25	✓
Rated Pressure			250 bar - 25 MPa		3650 psi	
Permissible Pressure			280 bar - 28 MPa		4050 psi	
Rated Flow			30 l/min		8 USGpm	
Rated Temperature			160 °C		320 °F	



TR4 - ADJUSTABLE NOZZLE WITH TIP PROTECTOR

P/N	Inlet	Outlet	Weight			
			gr	oz		
22.0100.00	1/4 Bsp F	1/4 Npt F	230	8,11	5	✓
Rated Pressure		250 bar - 25 MPa			3650 psi	
Permissible Pressure		280 bar - 28 MPa			4050 psi	
Rated Flow		30 l/min			8 USGpm	
Rated Temperature		160 °C			320 °F	

**"EG"- 1/4 BSP NOZZLE HOLDER**

P/N	Inlet	Outlet	Weight			
			gr	oz		
40.0050.00	1/4 Bsp F	--	77	2,72	10	✓
Rated Pressure		250 bar - 25 MPa			3650 psi	
Permissible Pressure		280 bar - 28 MPa			4050 psi	
Rated Temperature		160 °C			320 °F	

**SLUDGE PUMP**

P/N	Inlet	Outlet	Nozzle type	Nozzle	Weight			
					mm	gr	oz	
28.0750.44	3/8 Bsp F	1" 1/4 Bsp F	1/4 Npt M	0°		329	11,6	3 ✓
Rated Pressure		250 bar - 25 MPa				3650 psi		
Max. flow rate		25 l/min				6,5 USGpm		
Rated Temperature		90 °C				195 °F		



Use only 0° nozzle



GS3 - THREE WAY NOZZLE

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
25.0800.45	045	1/4 Bsp F	224	7,9	5	✓
25.0800.55	055	1/4 Bsp F	223	7,87	5	✓
25.0800.60	06	1/4 Bsp F	223	7,87	5	✓

Low pressure nozzle		40-20
Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	80 °C	175 °F



HL250 - VARIABLE SPRAY ANGLE NOZZLE +HI-LO SETTING

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
25.0700.10	02	1/4 Bsp F	146	5,15	10	✓
25.0700.11	025	1/4 Bsp F	145	5,11	10	✓
25.0700.12	03	1/4 Bsp F	146	5,15	10	✓
25.0700.25	032	1/4 Bsp F	146	5,15	10	
25.0700.13	035	1/4 Bsp F	146	5,15	10	✓
25.0700.35	037	1/4 Bsp F	145	5,11	10	
25.0700.14	04	1/4 Bsp F	146	5,15	10	✓
25.0700.45	043	1/4 Bsp F	145	5,11	10	
25.0700.15	045	1/4 Bsp F	146	5,15	10	✓
25.0700.55	05	1/4 Bsp F	146	5,15	10	✓
25.0700.16	053	1/4 Bsp F	150	5,3	10	
25.0700.65	055	1/4 Bsp F	146	5,15	10	✓
25.0700.66	06	1/4 Bsp F	146	5,15	10	✓
25.0700.18	07	1/4 Bsp F	146	5,15	10	✓
25.0700.20	08	1/4 Bsp F	146	5,15	10	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	90 °C	195 °F



HL280 - VARIABLE SPRAY ANGLE NOZZLE +HI-LO SETTING

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
25.0950.10	02	1/4 Bsp F	240	8,47	10	
25.0950.11	025	1/4 Bsp F	242	8,54	10	
25.0950.12	03	1/4 Bsp F	240	8,47	10	✓
25.0950.13	035	1/4 Bsp F	240	8,47	10	✓
25.0950.14	04	1/4 Bsp F	240	8,47	10	✓
25.0950.15	045	1/4 Bsp F	240	8,47	10	✓
25.0950.16	053	1/4 Bsp F	240	8,47	10	
25.0950.50	05	1/4 Bsp F	240	8,47	10	✓
25.0950.55	055	1/4 Bsp F	240	8,47	10	✓
25.0950.60	06	1/4 Bsp F	240	8,47	10	✓
25.0950.18	07	1/4 Bsp F	240	8,47	10	✓
25.0950.22	09	1/4 Bsp F	242	8,54	10	✓
25.0950.24	12	1/4 Bsp F	240	8,46	10	✓

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F



VAN 250 - VARIABLE SPRAY ANGLE NOZZLE

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.0850.11	025	1/4 Bsp F	132	4,66	10
25.0850.12	03	1/4 Bsp F	130	4,6	10
25.0850.13	035	1/4 Bsp F	130	4,6	10
25.0850.14	04	1/4 Bsp F	130	4,6	10
25.0850.15	045	1/4 Bsp F	132	4,66	10
25.0850.16	053	1/4 Bsp F	130	4,6	10
25.0850.20	08	1/4 Bsp F	130	4,6	10
Rated Pressure			250 bar - 25 MPa		3650 psi
Permissible Pressure			280 bar - 28 MPa		4050 psi
Rated Flow			40 l/min		10,5 USGpm
Rated Temperature			90 °C		195 °F



VAN - VARIABLE SPRAY ANGLE NOZZLE

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
25.0900.10	025	1/4 Bsp F	127	4,48	10	✓
25.0900.11	03	1/4 Bsp F	126	4,44	10	✓
25.0900.12	035	1/4 Bsp F	126	4,44	10	✓
25.0900.13	04	1/4 Bsp F	126	4,44	10	✓
25.0900.14	045	1/4 Bsp F	126	4,44	10	✓
25.0900.50	05	1/4 Bsp F	126	4,44	10	✓
25.0900.15	055	1/4 Bsp F	126	4,44	10	✓
25.0900.16	06	1/4 Bsp F	126	4,44	10	✓
25.0900.18	08	1/4 Bsp F	126	4,44	10	✓
25.0900.23	13	1/4 Bsp F	126	4,44	10	✓
25.0900.28	20	1/4 Bsp F	124	4,37	10	✓
Rated Pressure			250 bar - 25 MPa		3650 psi	
Permissible Pressure			280 bar - 28 MPa		4050 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			90 °C		195 °F	



SN1 - STEAM NOZZLE

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
25.2201.35	06	1/4 Bsp F	130	4,2	5	✓
Rated Pressure			100 bar - 10 MPa		1450 psi	
Rated Temperature			130 °C		266 °F	





UR12 - ROTATING NOZZLE 1/4BSP F - 12 MPA

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.1612.25	025	1/4 Bsp F	386	13,61	5
25.1612.30	03	1/4 Bsp F	381	13,44	5



Min. operating pressure	30 bar - 3 MPa	435 psi
Rated Pressure	120 bar - 12 MPa	1725 psi
Min. flow rate	3.1 (025 - 30 bar) l/min	0.8 (025 - 435 psi)
Rated Temperature	100 °C	212 °F
Min. operating temperature	5 °C	41 °F

Patent No.: I 0001350055



UR16 - ROTATING NOZZLE 1/4BSP F - 16 MPA

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.1680.20	02	1/4 Bsp F	410	14,46	5 ✓
Min. operating pressure : 80 bar - 8 MPa (1150 psi)					
25.1680.25	025	1/4 Bsp F	410	14,46	5 ✓
25.1680.30	03	1/4 Bsp F	410	14,46	5 ✓
25.1680.35	035	1/4 Bsp F	410	14,46	5 ✓
25.1680.40	04	1/4 Bsp F	412	14,53	5 ✓
25.1680.45	045	1/4 Bsp F	411	14,5	5 ✓
25.1680.50	05	1/4 Bsp F	412	14,53	5 ✓
25.1680.55	055	1/4 Bsp F	410	14,46	5 ✓
25.1680.60	06	1/4 Bsp F	412	14,53	5 ✓
25.1680.65	065	1/4 Bsp F	406	14,32	5
25.1680.70	07	1/4 Bsp F	410	14,46	5 ✓
25.1680.80	08	1/4 Bsp F	412	14,53	5 ✓



Min. operating pressure	30 bar - 3 MPa	435 psi
Rated Pressure	160 bar - 16 MPa	2300 psi
Min. flow rate	3.1 (025 - 30 bar) l/min	0.8 (025 - 435 psi)
Max. flow rate	23 (08 - 160 bar) l/min	6,1 (08 - 2300 psi)
Rated Temperature	100 °C	212 °F
Min. operating temperature	5 °C	41 °F

Patent No.: I 0001350055



UR20 - ROTATING NOZZLE 1/4BSP F -20 MPA

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.1720.20	02	1/4 Bsp F	292	10,3	5
25.1720.30	03	1/4 Bsp F	290	10,23	5 ✓
25.1720.35	035	1/4 Bsp F	291	10,26	5 ✓
25.1720.40	04	1/4 Bsp F	290	10,23	5 ✓
25.1720.45	045	1/4 Bsp F	292	10,3	5 ✓
25.1720.50	05	1/4 Bsp F	293	10,33	5 ✓
25.1720.55	055	1/4 Bsp F	290	10,23	5 ✓
25.1720.60	06	1/4 Bsp F	291	10,26	5
25.1720.65	065	1/4 Bsp F	292	10,3	5 ✓
25.1720.70	07	1/4 Bsp F	335	11,8	5 ✓



Rated Pressure	200 bar - 20 MPa	3000 psi
Rated Temperature	90 °C	195 °F



UR36CT -SST.ROTATING NOZZLE 1/2 NPT F 21 MPA **NEW**

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.1000.40	04	1/2 Npt F	508	18,14	1
25.1000.60	06	1/2 Npt F	508	18,14	1
25.1000.80	08	1/2 Npt F	508	18,14	1
25.1000.10	10	1/2 Npt F	508	18,14	1
25.1000.12	12	1/2 Npt F	508	18,14	1

Rated Pressure 210 bar - 21 MPa 3045 psi
 Min. operating pressure 40 bar - 4 MPa 600 psi
 Rated Temperature 90 °C 195 °F
 Material Stainless steel

Patent No.: Patent Pending


UR25 - ROTATING NOZZLE 1/4 BSP F - 25 MPA

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.1620.20	02	1/4 Bsp F	410	14,46	5 ✓
25.1620.30	03	1/4 Bsp F	410	14,46	5 ✓
25.1620.35	035	1/4 Bsp F	410	14,46	5 ✓
25.1620.40	04	1/4 Bsp F	410	14,46	5 ✓
25.1620.45	045	1/4 Bsp F	410	14,46	5 ✓
25.1620.50	05	1/4 Bsp F	411	14,5	5 ✓
25.1620.55	055	1/4 Bsp F	412	14,53	5 ✓
25.1620.60	06	1/4 Bsp F	411	14,5	5 ✓
25.1620.65	065	1/4 Bsp F	410	14,46	5 ✓
25.1620.70	07	1/4 Bsp F	412	14,53	5 ✓
25.1620.80	08	1/4 Bsp F	410	14,46	5 ✓

Min. operating pressure 80 bar - 8 MPa 1150 psi
 Rated Pressure 250 bar - 25 MPa 3650 psi
 Min. flow rate 4,3 (02 - 100 bar) l/min 1,2 (02 - 1450 psi)
 Max. flow rate 29 (08 - 250 bar) l/min 7,7 (08 - 3650 psi)
 Rated Temperature 100 °C 212 °F
 Min. operating temperature 5 °C 41 °F

Patent No.: I 0001350055


UR1 - ROTATING NOZZLE 1/4 NPT M - 35 MPA

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.1100.11	03	1/4 Npt M	119	4,2	5 ✓
25.1100.12	035	1/4 Npt M	118	4,16	5 ✓
25.1100.13	04	1/4 Npt M	118	4,16	5 ✓
25.1100.14	045	1/4 Npt M	119	4,2	5 ✓
25.1100.15	05	1/4 Npt M	119	4,2	5
25.1100.16	06	1/4 Npt M	120	4,23	5
25.1100.18	09	1/4 Npt M	118	4,16	5

Rated Pressure 350 bar - 35 MPa 5100 psi
 Permissible Pressure 390 bar - 39 MPa 5650 psi
 Rated Flow 30 l/min 8 USGpm
 Rated Temperature 80 °C 175 °F





UR32 - ROTATING NOZZLE 1/4BSP F - 35 MPA

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
25.1690.30	03	1/4 Bsp F	410	14,46	5	✓
25.1690.35	035	1/4 Bsp F	410	14,46	5	✓
25.1690.40	04	1/4 Bsp F	412	14,53	5	✓
25.1690.45	045	1/4 Bsp F	412	14,53	5	✓
25.1690.50	05	1/4 Bsp F	410	14,46	5	✓
25.1690.55	055	1/4 Bsp F	410	14,46	5	✓
25.1690.60	06	1/4 Bsp F	410	14,46	5	✓
25.1690.65	065	1/4 Bsp F	410	14,46	5	✓
25.1690.70	07	1/4 Bsp F	410	14,46	5	✓
25.1690.80	08	1/4 Bsp F	411	14,5	5	✓

Rated Pressure 350 bar - 35 MPa 5100 psi
 Min. operating pressure 180 bar - 18 MPa 2600 psi
 Min. flow rate 9,1 (03 - 180 bar) l/min 2,4 (03 - 2600 psi)
 Max. flow rate 34 (08 - 350 bar) l/min 9 (08 - 5100 psi) USGpm
 Rated Temperature 100 °C 212 °F
 Min. operating temperature 5 °C 41 °F
 Material Brass

Patent No.: I 0001350055



UR35 - ROTATING NOZZLE 1/4 BSP F - 35 MPA

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
25.1735.20	02	1/4 Bsp F	725	25,5	5	
25.1735.30	03	1/4 Bsp F	708	24,97	5	✓
25.1735.35	035	1/4 Bsp F	725	25,5	5	✓
25.1735.40	04	1/4 Bsp F	716	25,25	5	✓
25.1735.45	045	1/4 Bsp F	725	25,5	5	✓
25.1735.50	05	1/4 Bsp F	713	25,15	5	✓
25.1735.55	055	1/4 Bsp F	725	25,5	5	✓
25.1735.60	06	1/4 Bsp F	716	25,25	5	✓
25.1735.65	065	1/4 Bsp F	714	25,18	5	✓
25.1735.80	08	1/4 Bsp F	725	25,5	5	✓
25.1735.90	09	1/4 Bsp F	716	25,25	5	✓
25.1735.10	10	1/4 Bsp F	717	25,29	5	✓
25.1735.12	12	1/4 Bsp F	716	25,25	5	✓
25.1735.19	20	1/4 Bsp F	715	25,22	5	

Rated Pressure 350 bar - 35 MPa 5000 psi
 Rated Temperature 90 °C 194 °F



UR36 - SST. ROTATING NOZZLE 1/4BSP F - 36 MPA

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
25.1410.30	03	1/4 Bsp F	325	11,46	1	
25.1410.40	04	1/4 Bsp F	326	11,5	1	✓
25.1410.50	05	1/4 Bsp F	322	11,36	1	✓
25.1410.60	06	1/4 Bsp F	325	11,46	1	✓
25.1410.70	07	1/4 Bsp F	325	11,46	1	
25.1410.80	08	1/4 Bsp F	325	11,46	1	

Rated Pressure 360 bar - 36 MPa 5250 psi
 Min. flow rate 9,1 (03 - 180 bar) l/min 2,4 (03 - 2600 psi)
 Max. flow rate 34 (08 - 360 bar) l/min 9 (08 - 5250 psi) USGpm
 Min. operating pressure 180 bar - 18 MPa 2600 psi
 Rated Temperature 100 °C 212 °F
 Min. operating temperature 5 °C 41 °F
 Material Stainless steel 303

Patent No.: I 0001350055



UR40 - ROTATING NOZZLE 1/4BSP F - 40MPa/5800 PSI

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.1950.30	03	1/4 Bsp F	434	15,3	5
25.1950.35	035	1/4 Bsp F	434	15,3	5
25.1950.40	04	1/4 Bsp F	434	15,3	5
25.1950.45	045	1/4 Bsp F	434	15,3	5
25.1950.50	05	1/4 Bsp F	434	15,3	5
25.1950.55	055	1/4 Bsp F	434	15,3	5
25.1950.60	06	1/4 Bsp F	434	15,3	5
25.1950.65	065	1/4 Bsp F	434	15,3	5
25.1950.70	07	1/4 Bsp F	434	15,3	5
25.1950.80	08	1/4 Bsp F	434	15,3	5
25.1950.10	10	1/4 Bsp F	441	15,6	5
Nozzle and seat in tungsten carbide					
25.1950.12	12	1/4 Bsp F	441	15,6	5
Nozzle and seat in tungsten carbide					

Rated Pressure	400 bar - 40 MPa	5800 psi
Min. operating pressure	180 bar - 18 MPa	2600 psi
Rated Temperature	100 °C	212 °F
Min. operating temperature	5 °C	41 °F
Material	Brass	

Patent No.: Patent Pending


UR3 - ROTATING NOZZLE 1/2 BSP F - 50MPa

P/N	Nozzle Size	Inlet	Type	Weight		
				gr	oz	
25.1148.12	035	1/2 Bsp F	1 nozzle	508	17,92	1
25.1148.14	045	1/2 Bsp F	1 nozzle	505	17,81	1
25.1148.16	055	1/2 Bsp F	1 nozzle	505	17,81	1
25.1148.17	06	1/2 Bsp F	1 nozzle	505	17,81	1
25.1150.10	05	1/2 Bsp F	2 nozzles	507	17,88	1 ✓
25.1150.11	06	1/2 Bsp F	2 nozzles	510	17,99	1 ✓
25.1150.12	07	1/2 Bsp F	2 nozzles	507	17,88	1
25.1150.13	08	1/2 Bsp F	2 nozzles	510	17,99	1 ✓
25.1150.15	10	1/2 Bsp F	2 nozzles	509	17,95	1
25.1150.17	12	1/2 Bsp F	2 nozzles	505	17,81	1

Rated Pressure	500 bar - 50 MPa	7250 psi
Permissible Pressure	560 bar - 56 MPa	8100 psi
Rated Temperature	80 °C	175 °F


UR50 - ROTATING NOZZLE 1/4 BSP F - 50MPa

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.1750.30	03	1/4 Bsp F	677	23,88	1
25.1750.40	04	1/4 Bsp F	722	25,47	1
25.1750.45	045	1/4 Bsp F	726	25,61	1
25.1750.50	05	1/4 Bsp F	725	25,57	1
25.1750.55	055	1/4 Bsp F	724	25,54	1
25.1750.60	06	1/4 Bsp F	680	23,98	1
25.1750.65	065	1/4 Bsp F	678	23,91	1
25.1750.70	07	1/4 Bsp F	720	25,4	1

Rated Pressure	500 bar - 50 MPa	7250 psi
Rated Temperature	90 °C	194 °F





UR60 -SST.ROTATING NOZZLE 1/4BSP F - 60 MPA

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.1460.20	02	1/4 Bsp F	540	19,05	1
25.1460.30	03	1/4 Bsp F	540	19,05	1 ✓
25.1460.35	035	1/4 Bsp F	540	19,05	1 ✓
25.1460.40	04	1/4 Bsp F	540	19,05	1 ✓
25.1460.50	05	1/4 Bsp F	540	19,05	1 ✓
25.1460.60	06	1/4 Bsp F	541	19,08	1
25.1460.65	065	1/4 Bsp F	541	19,08	1 ✓
25.1460.70	07	1/4 Bsp F	540	19,05	1
25.1460.80	08	1/4 Bsp F	540	19,05	1

Rated Pressure	600 bar - 60 MPa	8700 psi
Min. flow rate	6.2 (02 - 180 bar) l/min	1.6 (02 - 2600 psi)
Max. flow rate	44.6 (08 - 600 bar) l/min	11.8 (08 - 8700 psi)
Min. operating pressure	180 bar - 18 MPa	2600 psi
Min. operating temperature	5 °C	41 °F
Rated Temperature	90 °C	195 °F

Patent No.: I 0001350055



UR70 -SST.ROTATING NOZZLE 1/4BSP F - 70 MPA **NEW**

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.1570.30	03	1/4 Bsp F	693	24,5	1
25.1570.35	035	1/4 Bsp F	693	24,5	1
25.1570.40	04	1/4 Bsp F	693	24,5	1
25.1570.50	05	1/4 Bsp F	693	24,5	1
25.1570.60	06	1/4 Bsp F	693	24,5	1
25.1570.65	065	1/4 Bsp F	693	24,5	1
25.1570.70	07	1/4 Bsp F	693	24,5	1
25.1570.80	08	1/4 Bsp F	693	24,5	1

Rated Pressure	700 bar - 70 MPa	10150 psi
Min. operating pressure	180 bar - 18 MPa	2600 psi
Min. operating temperature	5 °C	41 °F
Rated Temperature	90 °C	195 °F

Patent No.: Patent pending



SST.STRAINER X ROTATING NOZZLE 1/4BSP F M- 60 MPA

P/N	Inlet	Outlet	Weight		
			gr	oz	
28.0180.00	1/4 Bsp F	1/4 Bsp M	22,4	0,78	5 ✓

Rated Pressure	600 bar - 60 MPa	8700 psi
Max. flow rate	44,6 l/min	11,8 USGpm
Rated Temperature	90 °C	195 °F
Min. operating temperature	5 °C	41 °F
Filtration parameter	50 mesh	400 µm
Material	Stainless steel 303	



TS3 -SAND BLASTER - PLASTIC-HARD.STEEL

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.0080.12	03	1/4 Bsp F	344	12,13	1
25.0080.14	04	1/4 Bsp F	346	12,2	1
Rated Pressure			120 bar - 12 MPa		1750 psi
Permissible Pressure			140 bar - 14 MPa		2000 psi
Rated Flow			20 l/min		5,3 USGpm
Rated Temperature			90 °C		195 °F



LF220 EXTENSION WITH TS3 SAND BLASTER - M22

P/N	Hose length		Weight		
	m	yd	gr	oz	
41.1140.12	3	3,28	1090	38,76	1



TS2 - SAND BLASTER - HARD.STEEL

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.0020.12	03	1/4 Bsp F	590	20,81	1 ✓
25.0020.14	04	1/4 Bsp F	599	21,13	1 ✓
25.0020.15	045	1/4 Bsp F	592	20,88	1 ✓
25.0020.16	05	1/4 Bsp F	596	21,02	1 ✓
Rated Pressure			120 bar - 12 MPa		1750 psi
Permissible Pressure			140 bar - 14 MPa		2000 psi
Rated Flow			20 l/min		5,3 USGpm
Rated Temperature			90 °C		195 °F



TS8 - SANDBLASTER - TUNGSTEN CARBIDE

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
25.0000.10	02	1/4 Bsp F	650	22,9	1
25.0000.12	03	1/4 Bsp F	639	22,54	1 ✓
25.0000.14	04	1/4 Bsp F	632	22,29	1 ✓
25.0000.15	045	1/4 Bsp F	633	22,32	1 ✓
25.0000.16	05	1/4 Bsp F	630	22,22	1 ✓
25.0000.18	075	1/4 Bsp F	631	22,26	1 ✓
25.0000.20	085	1/4 Bsp F	637	22,47	1
Rated Pressure			250 bar - 25 MPa		3650 psi
Permissible Pressure			280 bar - 28 MPa		4050 psi
Rated Flow			40 l/min		10,5 USGpm
Rated Temperature			90 °C		195 °F





TS12 - SAND BLASTER 500 BAR - FLAT SPRAY PATTERN

P/N	Inlet	Nozzle Size	Weight			
			gr	oz		
25.0450.00	1/4 Bsp F	1/4Npt M - 15°	912	32,17	1	✓
Rated Pressure			500 bar - 50 MPa		7250 psi	
Permissible Pressure			560 bar - 56 MPa		8100 psi	
Rated Flow			80 l/min		21 USGpm	
Rated Temperature			90 °C		195 °F	

High pressure nozzles. See 16.1415.XX



TS12 - SAND BLASTER 500 BAR - PENCIL SPRAY PATTERN

P/N	Inlet	Nozzle Size	Weight			
			gr	oz		
25.0460.00	1/4 Bsp F	1/4Npt M - 0°	998	35,2	1	✓
Rated Pressure			500 bar - 50 MPa		7250 psi	
Permissible Pressure			560 bar - 56 MPa		8100 psi	
Rated Flow			80 l/min		21 USGpm	
Rated Temperature			90 °C		195 °F	

High pressure nozzles. See 16.1401.XX



TS12 - SAND BLASTER 500BAR-EXTND. - PENCIL SPRAY PATTERN

P/N	Inlet	Nozzle Size	Weight			
			gr	oz		
25.0480.00	1/4 Bsp F	1/4Npt M - 0°	1620	57,1	1	
Rated Pressure			500 bar - 50 MPa		7250 psi	
Permissible Pressure			560 bar - 56 MPa		8100 psi	
Rated Flow			80 l/min		21 USGpm	
Rated Temperature			90 °C		195 °F	

High pressure nozzles. See 16.1415.XX



TS12 - 0° 50MPA NOZZLE - (CONV.+O-RING)

P/N	Nozzle Size	Inlet	Type	Weight			
				gr	oz		
16.1401.40	0° -04	1/4 Npt M	Compl.nozzle	19	0,67	2	✓
16.1401.50	0° -05	1/4 Npt M	Compl.nozzle	19	0,67	2	✓
16.1401.55	0° -055	1/4 Npt M	Compl.nozzle	18	0,6	2	
10.3002.01	-	-	O-ring	1	1	10	
25.0506.51	-	-	Guid.vane	1	1	3	

Rated Pressure 500 bar - 50 MPa 7250 psi

These nozzles are compulsory for use under high pressure - 500 bar - 7250 psi



S10 - ADJUSTABLE PROBE

P/N	Length		Inlet	Weight			
	mm	in.		gr	oz		
25.0300.00	500	19,7	13 mm (TS8-TS2-TS3)	610	21,5	1	✓
25.0300.20	500	19,7	21 mm (TS12)	662	23,35	1	✓

Material

Stainless steel



LOW PRESSURE NOZZLES **NEW**

P/N	Inlet	Nozzle type	Nozzle Size	Material	Weight			
					gr	oz		
16.1350.40	1/4 Npt M	50°	40	Brass	14	0,49	10	✓
16.1345.40	1/4 Bspt M	25	40	Stainless steel 303	16	0,56	10	
16.1327.40	1/4 Bspt M	25	40	Brass	16	0,56	10	
16.1346.30	1/4 Npt M	60°	30	Pom	16	0,56	10	
16.1360.20	1/2 Bst M	50°	200	Brass	16	0,56	3	
16.1361.20	1/2 Bst M	50°	200	Stainless steel 303	16	0,56	2	

Rated Pressure

50 bar - 5 MPa

715 psi


AI303 SST. HIGH PRESSURE NOZZLE M4 - 0°

P/N	Nozzle Size	Inlet	External diameter		Weight			
			mm	in	gr	oz		
25.1189.51	016	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1190.51	02	Hex.2 mm	4	01,58	0,86	0,03	10	
25.1191.51	023	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1091.51	025	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1092.51	03	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1193.51	032	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1093.51	035	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1098.51	037	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1094.51	04	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1194.51	043	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1095.51	045	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1195.51	05	Hex.2 mm	2	1,58	0,86	0,03	10	
25.1196.51	053	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1197.51	055	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1186.51	06	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1199.51	07	Hex.2 mm	4	1,58	0,86	0,03	10	
25.1085.51	08	Hex.2 mm	4	1,58	0,86	0,03	10	
25.0958.51	09	Hex.2,5 mm	4,5	1,78	0,84	0,03	10	
25.0959.51	12	Hex.2,5 mm	4,5	1,78	0,84	0,03	10	

Rated Pressure

250 bar - 25 MPa

3650 psi

Material

Stainless steel 303

Inlet

M 4 x 0,7 mm

0° pencil jet nozzles


AI 303 SST. HIGH PRESSURE NOZZLE M4 SHORT - 0°

P/N	Nozzle Size	Inlet	External diameter		Weight			
			mm	in	gr	oz		
80.0350.51	02	Hex.2 mm	4	01,58	0,86	0,03	10	
80.0351.51	025	Hex.2 mm	4	01,58	0,86	0,03	10	
80.0352.51	03	Hex.2 mm	4	01,58	0,86	0,03	10	
80.0353.51	035	Hex.2 mm	4	01,58	0,86	0,03	10	
80.0354.51	04	Hex.2 mm	4	01,58	0,86	0,03	10	

Rated Pressure

250 bar - 25 MPa

3650 psi

Material

Stainless steel 303

Inlet

M 4 x 0,7 mm

0° pencil jet nozzles



**AI 316L SST. HIGH PRESSURE NOZZLE M4 SHORT - 0°**

P/N	Nozzle Size	Inlet	External diameter		Weight		
			mm	in	gr	oz	
80.0899.60	016	Hex.2 mm	4	1,58	0,86	0,03	4
80.0892.60	02	Hex.2 mm	4	1,58	0,86	0,03	4
80.0893.60	025	Hex.2 mm	4	1,58	0,86	0,03	4
80.0882.60	03	Hex.2 mm	4	1,58	0,86	0,03	4
80.0883.60	035	Hex.2 mm	4	1,58	0,86	0,03	4
80.0884.60	04	Hex.2 mm	4	1,58	0,86	0,03	4
80.0885.60	045	Hex.2 mm	4	1,58	0,86	0,03	4
80.0895.60	05	Hex.2 mm	4	1,58	0,86	0,03	4
80.0886.60	055	Hex.2 mm	4	1,58	0,86	0,03	4
80.0887.60	06	Hex.2 mm	4	1,58	0,86	0,03	4
80.0888.60	065	Hex.2 mm	4	1,58	0,86	0,03	4
80.0889.60	07	Hex.2 mm	4	1,58	0,86	0,03	4
80.0890.60	-	Hex.2 mm	4	1,58	0,86	0,03	4

Rated Pressure 250 bar - 25 MPa 3650 psi
 Material Stainless steel Ai316
 Inlet M 4 x 0,7 mm


0° pencil jet nozzles

**SST. HIGH PRESSURE NOZZLE M6 - 0°**

P/N	Nozzle Size	Weight		
		gr	oz	
25.1250.51	015	1	0,04	10
25.1251.51	025	1	0,04	10
25.1252.51	035	1	0,04	10
25.1255.51	055	1	0,04	10
25.1257.51	07	1	0,04	10
25.1258.51	075	1	0,04	10
25.1259.51	08	1	0,04	10
25.1260.51	10	1	0,04	10
25.1263.51	12	1	0,04	10
25.1265.51	15	1	0,04	10

Rated Pressure 250 bar - 25 MPa 3650 psi
 Material Stainless steel
 Inlet M 6 x 1 mm

0° pencil jet nozzles

**HIGH PRESSURE NOZZLE M15X1 - 0°**

P/N	Nozzle Size	Hole size		Weight		
		mm	in	gr	oz	
16.1280.12	035	1,2	0,05	19	0,67	10
16.1280.15	06	1,5	0,06	19	0,67	10
16.1280.18	075	1,8	0,07	19	0,67	10
16.1280.23	09	2,3	0,09	19	0,67	10
16.1280.35	25	3,5	0,14	19	0,67	10

Rated Pressure 250 bar - 25 MPa 3650 psi
 Nozzle material Alumina
 Inlet M15x1 M

0° pencil jet nozzles



HIGH PRESSURE NOZZLE M15X1 - 0°- NI.PL.BRASS

P/N	Nozzle Size	Hole size		Weight				
		mm	in	gr	oz			
16.1270.35	30	3,5	0,14	21	0,74	10		
16.1270.40	30	4,0	0,16	21	0,74	10		
16.1270.45	40	4,5	0,18	21	0,74	10		
16.1270.50	55	5	0,20	20	0,71	10		
16.1270.55	65	5,5	0,22	21	0,74	10		
16.1270.60	80	6	0,24	21	0,74	10		
16.1270.70	90.00	7	0,28	21	0,74	10		

Rated Pressure
Nozzle material
Inlet

250 bar - 25 MPa

3650 psi
Brass
M15x1 M

0° pencil jet nozzles



SST. HIGH PRESSURE NOZZLE 1/4NPT M 0°+GUIDE VANE

P/N	Nozzle Size	Inlet	Weight				
			gr	oz			
16.1380.30	03	1/4 Npt M	19	0,7	10		✓
16.1380.35	035	1/4 Npt M	19	0,7	10		
16.1380.40	04	1/4 Npt M	19	0,7	10		✓
16.1380.45	045	1/4 Npt M	19	0,7	10		✓
16.1380.50	05	1/4 Npt M	19	0,7	10		✓
16.1380.55	055	1/4 Npt M	19	0,7	10		
16.1380.60	06	1/4 Npt M	19	0,7	10		
16.1380.65	065	1/4 Npt M	19	0,7	10		
16.1380.70	07	1/4 Npt M	19	0,67	10		✓

Rated Pressure
Material

250 bar - 25 MPa

3650 psi
Stainless steel

0° pencil jet nozzles with sst guide vane



SST. HIGH PRESSURE NOZZLE 1/8NPT M 0°+GUIDE VANE

P/N	Nozzle Size	Inlet	Weight				
			gr	oz			
16.1363.20	02	1/8 Npt M	14	0,5	10		
16.1363.30	03	1/8 Npt M	14	0,49	10		
16.1363.40	04	1/8 Npt M	14	0,5	10		✓
16.1363.45	045	1/8 Npt M	14	0,5	10		
16.1363.50	05	1/8 Npt M	14	0,49	10		
16.1363.60	06	1/8 Npt M	14	0,5	10		
16.1363.70	07	1/8 Npt M	14	0,5	10		
16.1363.90	09	1/8 Npt M	14	0,5	10		
16.1363.15	15	1/8 Npt M	14	0,5	10		

Rated Pressure
Material

250 bar - 25 MPa

3650 psi
Stainless steel

0° pencil jet nozzles with sst guide vane





SST EXTENDED NOZZLE 1/4 NPT M- 0°+ GUIDE VANE

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
80.0418.23	07	1/4 Npt M	43	1,5	2	✓
80.0419.23	08	1/4 Npt M	43	1,5	2	
80.0420.23	09	1/4 Npt M	43	1,5	2	✓
80.0421.23	095	1/4 Npt M	43	1,5	2	
80.0422.23	11	1/4 Npt M	43	1,5	2	✓
80.0423.23	12	1/4 Npt M	43	1,5	2	✓
80.0424.23	13	1/4 Npt M	43	1,5	2	✓
80.0425.23	14	1/4 Npt M	43	1,5	2	
80.0426.23	15	1/4 Npt M	43	1,5	2	
80.0427.23	16	1/4 Npt M	43	1,5	2	
80.0428.23	18	1/4 Npt M	43	1,5	2	
80.0429.23	19	1/4 Npt M	43	1,5	2	
80.0430.23	20	1/4 Npt M	43	1,5	2	✓
80.0435.23	25	1/4 Npt M	43	1,5	2	
80.0440.23	30	1/4 Npt M	43	1,5	2	
80.0444.23	40	1/4 Npt M	43	1,5	2	
80.0445.23	50	1/4 Npt M	43	1,5	2	

Rated Pressure
Material

250 bar - 25 MPa

3650 psi
Stainless steel

The use of protection 25.4822.00 is recommended when mounting these nozzles on a A80 R tank cleaner.



SST HIGH PRESSURE NOZZLE 1/4 NPT M - 5°

P/N	Nozzle type	Inlet	Weight		
			gr	oz	
16.1305.30	03	1/4 Npt M	16	0,56	10
16.1305.40	04	1/4 Npt M	18	0,6	10
16.1305.50	05	1/4 Npt M	18	0,6	10
16.1305.60	06	1/4 Npt M	18	0,6	10
16.1305.70	07	1/4 Npt M	18	0,6	10
16.1305.80	08	1/4 Npt M	18	0,6	10

Rated Pressure
Material

250 bar - 25 MPa

3650 psi
Stainless steel



SST HIGH PRESSURE NOZZLE 1/4 NPT M 15°

P/N	Nozzle Size	Inlet	Weight		
			gr	oz	
16.1315.30	03	1/4 Npt M	16	0,56	10
16.1315.35	035	1/4 Npt M	16	0,56	10
16.1315.40	04	1/4 Npt M	16	0,56	10
16.1315.45	045	1/4 Npt M	16	0,56	10
16.1315.50	05	1/4 Npt M	16	0,56	10
16.1315.55	055	1/4 Npt M	16	0,56	10
16.1315.60	06	1/4 Npt M	16	0,56	10
16.1315.65	065	1/4 Npt M	16	0,56	10
16.1315.70	07	1/4 Npt M	16	0,56	10
16.1315.80	08	1/4 Npt M	16	0,56	10

Rated Pressure
Material

250 bar - 25 MPa

3650 psi
Stainless steel



SST HIGH PRESSURE NOZZLE 1/8NPT M 15°

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
16.1316.20	02	1/8 Npt M	12	0,42	3	✓
16.1316.30	03	1/8 Npt M	12	0,42	3	✓
16.1316.40	04	1/8 Npt M	12	0,42	3	✓
16.1316.45	045	1/8 Npt M	12	0,42	3	✓
16.1316.55	055	1/8 Npt M	14	0,5	3	
16.1316.60	06	1/8 Npt M	14	0,5	3	
16.1316.70	07	1/8 Npt M	14	0,5	3	
16.1316.90	09	1/8 Npt M	14	0,5	3	



Rated Pressure 250 bar - 25 MPa 3650 psi
Material Stainless steel

SST HIGH PRESSURE NOZZLE 1/4 NPT M 25°

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
16.1325.30	03	1/4 Npt M	16	0,56	10	✓
16.1325.35	035	1/4 Npt M	16	0,56	10	✓
16.1325.40	04	1/4 Npt M	16	0,56	10	✓
16.1325.45	045	1/4 Npt M	16	0,56	10	✓
16.1325.50	05	1/4 Npt M	16	0,56	10	✓
16.1325.55	055	1/4 Npt M	16	0,56	10	✓
16.1325.60	06	1/4 Npt M	16	0,56	10	✓
16.1325.65	065	1/4 Npt M	16	0,56	10	✓
16.1325.70	07	1/4 Npt M	16	0,56	10	✓
16.1325.80	08	1/4 Npt M	16	0,56	10	✓



Rated Pressure 250 bar - 25 MPa 3650 psi
Material Stainless steel

NOZZLE 0° - 100MPA SAPPHIRE -1/4-1/8

P/N	Hole size		Inlet	Weight			
	mm	in		gr	oz		
16.1404.31	1,20	0,047	1/4 Npt M	18	0,6	2	
16.1404.48	1,5	0,06	1/4 Npt M	18	0,6	2	
16.1404.62	1,7	0,067	1/4 Npt M	18	0,6	2	
16.1404.68	1,8	0,07	1/4 Npt M	18	0,6	2	
16.1408.20	1,00	0,04	1/8 Npt M	11	0,4	2	
16.1408.30	1,20	0,047	1/8 Npt M	11	0,4	2	
16.1408.40	1,4	0,055	1/8 Npt M	11	0,4	2	
16.1408.54	1,60	0,063	1/8 Npt M	11	0,4	2	
16.1408.60	1,70	0,067	1/8 Npt M	11	0,4	2	



Nozzle type 0°
Rated Pressure 1000 bar - 100 MPa 14500 psi
Material Stainless steel
Nozzle material Sapphire

These nozzles are compulsory for use under high pressure - 500 -1000 bar - 7250 -14500 psi



HIGH PRESSURE 50MPa NOZZLE - 15°

P/N	Nozzle Size	Inlet	Weight			
			gr	oz		
16.1415.40	15° -04	1/4 Npt M	17	0,6	2	✓
16.1415.50	15° -05	1/4 Npt M	17	0,6	2	
16.1415.55	15° -055	1/4 Npt M	17	0,6	2	
16.1415.80	15° -08	1/4 Npt M	17	0,6	2	
16.1415.90	15° -09	1/4 Npt M	17	0,6	2	



Rated Pressure 500 bar - 50 MPa 7250 psi

These nozzles are compulsory for use under high pressure - 500 bar - 7250 psi - Nozzle suitable for TS12

NOZZLE 40° 50MPa TUNG.CARBIDE -1/4-1/8

P/N	Hole size		Inlet	Weight			
	mm	in		gr	oz		
16.1444.20	0,94	0,037	1/4 Npt M	18	0,6	2	
16.1444.30	1,14	0,045	1/4 Npt M	18	0,6	2	
16.1444.38	1,29	0,05	1/4 Npt M	18	0,6	2	
16.1444.49	1,45	0,057	1/4 Npt M	18	0,6	2	
16.1444.55	1,55	0,061	1/4 Npt M	18	0,6	2	
16.1448.20	0,94	0,037	1/8 Npt M	11	0,4	2	
16.1448.30	1,14	0,045	1/8 Npt M	11	0,4	2	
16.1448.38	1,29	0,05	1/8 Npt M	11	0,4	2	
16.1448.49	1,45	0,057	1/8 Npt M	11	0,4	2	
16.1448.55	1,55	0,061	1/8 Npt M	11	0,4	2	



Nozzle type 40°
 Rated Pressure 500 bar - 50 MPa 7250 psi
 Material Stainless steel
 Nozzle material Tungsten carbide

These nozzles are compulsory for use under high pressure - 500 bar - 7250 psi

ST 3 DRAIN CLEANING NOZZLE 1/8 BSP F

P/N	Nozzle Size	Weight			
		gr	oz		
25.1203.30	03	10	0,35	3	✓
25.1203.40	04	10	0,35	3	✓
25.1203.50	05	10	0,35	3	✓
25.1203.60	06	10	0,35	3	✓
25.1203.70	07	10	0,35	3	
25.1203.80	08	10	0,35	3	

Rated Pressure 350 bar - 35 MPa 5100 psi
 Material Stainless steel 303
 No. of Ports 3
 Inlet 1/8 Bsp F



ST 3 DRAIN CLEANING NOZZLE 1/4 BSP F

P/N	Nozzle Size	Weight			
		gr	oz		
25.1213.30	03	18	0,63	3	✓
25.1213.40	04	18	0,63	3	✓
25.1213.50	05	18	0,63	3	✓
25.1213.60	06	18	0,63	3	✓
25.1213.70	07	18	0,63	3	
25.1213.80	08	18	0,63	3	

Rated Pressure 350 bar - 35 MPa 5100 psi
 Material Stainless steel 303
 No. of Ports 3
 Inlet 1/4 Bsp F



DRAIN CLEANING NOZZLE 1/4 BSP M

P/N	Rated pr.		Nozzle Size	No. of Ports	Weight			
	bar - MPa	psi			gr	oz		
25.1201.51	250 - 25	3650	04	4	23	0,81	10	✓
25.1216.31	120 - 12	1750	035	3	24	0,8	10	✓

Mater : Brass

Inlet 1/4 Bsp M
 Material Stainless steel



ST 3 DRAIN CLEANING NOZZLE 3/8 BSP F

P/N	Nozzle Size	Weight			
		gr	oz		
25.1223.30	03	34	1,2	3	
25.1223.40	04	34	1,2	3	
25.1223.50	05	34	1,2	3	
25.1223.60	06	34	1,2	3	
25.1223.70	07	34	1,2	3	
25.1223.80	08	34	1,2	3	

Rated Pressure 350 bar - 35 MPa 5100 psi
 Material Stainless steel 303
 No. of Ports 3
 Inlet 3/8 Bsp F





ST 4 DRAIN CLEANING NOZZLE 1/8 BSP F

P/N	Nozzle Size	Weight			
		gr	oz		
25.1204.30	03	10	0,35	3	✓
25.1204.40	04	10	0,35	3	✓
25.1204.50	05	10	0,35	3	✓
25.1204.60	06	10	0,35	3	✓
25.1204.70	07	10	0,35	3	✓
25.1204.80	08	10	0,35	3	
Rated Pressure		350 bar - 35 MPa		5100 psi	
Material				Stainless steel 303	
No. of Ports				4	
Inlet				1/8 Bsp F	



ST 4 DRAIN CLEANING NOZZLE 1/4 BSP F

P/N	Nozzle Size	Weight			
		gr	oz		
25.1214.30	03	18	0,63	3	✓
25.1214.40	04	18	0,63	3	✓
25.1214.50	05	18	0,63	3	✓
25.1214.60	06	18	0,63	3	✓
25.1214.70	07	18	0,63	3	
25.1214.80	08	18	0,63	3	✓
Rated Pressure		350 bar - 35 MPa		5100 psi	
Material				Stainless steel 303	
No. of Ports				4	
Inlet				1/4 Bsp F	



ST 4 DRAIN CLEANING NOZZLE 3/8 BSP F

P/N	Nozzle Size	Weight			
		gr	oz		
25.1224.30	03	34	1,2	3	
25.1224.40	04	35	1,23	3	✓
25.1224.50	05	34	1,2	3	✓
25.1224.60	06	34	1,2	3	✓
25.1224.70	07	34	1,2	3	
25.1224.80	08	34	1,2	3	✓
Rated Pressure		350 bar - 35 MPa		5100 psi	
Material				Stainless steel 303	
No. of Ports				4	
Inlet				3/8 Bsp F	



DRAIN CLEANING NOZZLE 3/8 BSP M

P/N	Nozzle Size	No. of Ports	Inlet	Weight			
				gr	oz		
25.1210.51	06	9	3/8 Bsp M	36	1,2	5	✓
Rated Pressure		250 bar - 25 MPa		3650 psi			
Material				Stainless steel			



STR-1/8 ROTAT. DRAIN CLEANING NOZZLE 1/8 BSP F

P/N	Nozzle Size	Weight			
		gr	oz		
25.1285.30	03	30	1,06	3	✓
25.1285.40	04	30	1,06	3	✓
25.1285.50	05	30	1,06	3	✓
25.1285.60	06	30	1,06	3	
25.1285.70	07	30	1,06	3	
25.1285.80	08	30	1,06	3	

Rated Pressure	250 bar - 25 MPa	3650 psi
Material	Al303+Bz-Al	
No. of Ports	3	
Inlet	1/8 Bsp F	
External diameter	18 mm	0,71 in



STR-1/4 ROTAT. DRAIN CLEANING NOZZLE 1/4 BSP F

P/N	Nozzle Size	Weight			
		gr	oz		
25.1290.30	03	35	1,23	3	✓
25.1290.40	04	34	1,2	3	✓
25.1290.50	05	35	1,23	3	✓
25.1290.60	06	35	1,23	3	✓
25.1290.70	07	35	1,23	3	
25.1290.80	08	35	1,23	3	

Rated Pressure	250 bar - 25 MPa	3650 psi
Material	Al303+Bz-Al	
No. of Ports	3	
Inlet	1/4 Bsp F	
External diameter	18 mm	0,71 in



STR-3/8 ROTAT. DRAIN CLEANING NOZZLE 3/8 BSP F

P/N	Nozzle Size	Weight			
		gr	oz		
25.1295.60	06	63	2,22	3	✓
25.1295.70	07	65	2,3	3	
25.1295.80	08	65	2,3	3	
25.1295.90	09	65	2,3	3	
25.1295.10	10	65	2,3	3	
25.1295.11	11	63	2,22	3	

Rated Pressure	250 bar - 25 MPa	3650 psi
Material	Al303+Bz-Al	
No. of Ports	3	
Inlet	3/8 Bsp F	
External diameter	22 mm	0.87 in





RU - DRAIN CLEANING NICK-PLATED STEEL NOZZLE

P/N	Nozzle Size	No. of Ports	Inlet	Weight		
				gr	oz	
25.1236.00	-	6	1/2 Bsp F	70	2,47	1
25.1236.20	20	6	1/2 Bsp F	84	2,96	1 ✓
25.1236.30	30	6	1/2 Bsp F	84	2,96	1 ✓
25.1237.00	-	7	3/4 Bsp F	242	8,54	1
25.1237.30	30	7	3/4 Bsp F	250	8,82	1
25.1237.40	40	7	3/4 Bsp F	250	8,82	1 ✓
25.1237.50	50	7	3/4 Bsp F	250	8,82	1
25.1237.60	60	7	3/4 Bsp F	250	8,82	1
25.1239.00	-	7	1 Bsp F	351	12,38	1
25.1239.50	50	7	1 Bsp F	345	12,17	1
25.1239.60	60	7	1 Bsp F	345	12,17	1
25.1239.80	80	7	1 Bsp F	346	12,2	1 ✓

Rated Pressure
Rated Temperature
Material

300 bar - 30 MPa
160 °C

4350 psi
320 °F
Nick.pl.steel



RR-TS - ROTATING DRAIN CLEANING STAINLESS STEEL NOZZLE -SPHERICAL HEAD

P/N	Nozzle Size	No. of Ports	Inlet	Weight		
				gr	oz	
25.1370.00	-	10	1/2 Bsp F	310	11	1
25.1370.20	20	10	1/2 Bsp F	327	11,53	1 ✓
25.1370.30	30	10	1/2 Bsp F	330	11,64	1
25.1375.30	30	10	3/4 Bsp F	845	29,81	1
25.1375.40	40	10	3/4 Bsp F	845	29,81	1
25.1380.50	50	10	1 Bsp F	820	28,92	1
25.1380.70	70	10	1 Bsp F	810	28,5	1

Rated Pressure
Rated Temperature
Material

300 bar - 30 MPa
160 °C

4350 psi
320 °F
Stainless steel



RR-TF -SST. ROTATING DRAIN CLEANING -HEAD CUTTER

P/N	Nozzle Size	No. of Ports	Inlet	Weight		
				gr	oz	
25.1246.00	-	10	1/2 Bsp F	310	11	1
25.1246.20	20	10	1/2 Bsp F	327	11,53	1
25.1246.30	30	10	1/2 Bsp F	330	11,64	1
25.1247.30	30	10	3/4 Bsp F	845	29,81	1
25.1247.40	40	10	3/4 Bsp F	845	29,81	1
25.1249.50	50	10	1 Bsp F	820	28,92	1
25.1249.70	70	10	1 Bsp F	810	28,5	1

Rated Pressure
Rated Temperature
Material

300 bar - 30 MPa
160 °C

4350 psi
320 °F
Stainless steel



DRAIN CLEANING NOZZLE WITH 10 M (10,9 YD) HOSE

P/N	Nozzle Size	Inlet	Mat.	Weight		
				gr	oz	
25.1280.001	04-055	1/4 Bsp M	Brass	2953	104,15	1
Supplied with 2 nozzles 04-055. 055 version is equipped with guide spring. 4 pcs kit						
Rated Pressure	130 bar - 13 MPa		1890 psi			
Tube type			3/16"			
Hose length	10 m		10,9 yd			





M27 × 2 - COUPLING TYPE "A+B"

P/N	Inlet	Couplings	Weight		
			gr	oz	
26.0450.00	1/4 Bsp F	A M27	84	2,96	10
26.0460.00	1/4 Bsp F	B M27	66	2,3	10



Rated Pressure	120 bar - 12 MPa	1750 psi
Permissible Pressure	130 bar - 13 MPa	1900 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	60 °C	140 °F

Pin Ø14 mm



AR1 - "A" NIPPLE M22 - Ø14 MM - BSP

P/N	Inlet	Weight		
		gr	oz	
26.0029.31	1/8 Bsp F	65	2,3	10
26.0051.31	1/4 Bsp M	46	1,62	25 ✓
26.0002.31	1/4 Bsp F	65	2,3	25 ✓
26.0030.31	3/8 Bsp M	53	1,87	25 ✓
26.0031.31	3/8 Bsp F	68	2,4	25 ✓
26.0032.31	1/2 Bsp M	61	2,15	25 ✓
26.0033.31	1/2 Bsp F	80	2,82	25 ✓
26.0041.31	A M21	65	2,3	10
26.0005.31	A M22	65	2,3	25 ✓



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Pin Ø14 mm - M22×1,5 M



AR41 - "A" SST. NIPPLE M22 Ø14 MM - BSP

P/N	Inlet	Weight		
		gr	oz	
26.0235.51	3/8 Bsp F	54	1,9	5 ✓



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel 303	

Pin Ø14 mm - M22×1,5 M



AR1 - "B" COUPLER M22 2 PCS. - BSP

P/N	Inlet	Hand nut	Weight		
			gr	oz	
26.0150.05	1/8 Bsp F	AR1 type	70	2,4	10
26.0150.30	1/4 Bsp M	AR1 type	66	2,33	25 ✓
26.0150.20	1/4 Bsp F	AR1 type	68	2,4	25 ✓
26.9952.98	1/4 Bsp F	AR4 type	73	2,57	25
26.9954.98	1/4 Bsp F	Old type	70	2,4	25
26.0150.40	3/8 Bsp M	AR1 type	72	2,54	25 ✓



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Pin Ø14 mm - M22×1,5 F - non-revolving pin



AR1 - "B" COUPLER M22 2 PCS. ROTATING PIN - BSP

P/N	Inlet	Hand nut	Weight		
			gr	oz	
26.0150.31	1/4 Bsp M	AR1 type	70	2,4	5
Rated Pressure			250 bar - 25 MPa		3650 psi
Permissible Pressure			280 bar - 28 MPa		4050 psi
Rated Flow			40 l/min		10,5 USGpm
Rated Temperature			160 °C		320 °F

Pin Ø14 mm - M22x1,5 F



AR1 - "B" COUPLER M22- 3 PCS.- BSP

P/N	Inlet	Weight		
		gr	oz	
26.0250.05	1/8 Bsp F	112	3,9	5
26.0250.30	1/4 Bsp M	104	3,67	25 ✓
26.0250.20	1/4 Bsp F	118	4,16	25 ✓
26.0250.50	3/8 Bsp M	111	3,92	25 ✓
26.0250.40	3/8 Bsp F	117	4,13	25 ✓
26.0250.70	1/2 Bsp M	124	4,37	10 ✓
26.0250.60	1/2 Bsp F	147	5,18	25 ✓
Rated Pressure		250 bar - 25 MPa		3650 psi
Permissible Pressure		280 bar - 28 MPa		4050 psi
Rated Flow		40 l/min		10,5 USGpm
Rated Temperature		160 °C		320 °F

Pin Ø14 mm - M22x1,5 F - non-revolving pin



AR1 - "B" COUPLER M22- 3 PCS. ROTATING PIN - BSP

P/N	Inlet	Weight		
		gr	oz	
26.0250.31	1/4 Bsp M	100	3,53	5 ✓
26.0250.21	1/4 Bsp F	114	4,02	5 ✓
26.0250.51	3/8 Bsp M	106	3,74	5 ✓
26.0250.41	3/8 Bsp F	114	4,02	5 ✓
26.0250.71	1/2 Bsp M	120	4,2	5
Rated Pressure		250 bar - 25 MPa		3650 psi
Permissible Pressure		280 bar - 28 MPa		4050 psi
Rated Flow		40 l/min		10,5 USGpm
Rated Temperature		160 °C		320 °F

Pin Ø14 mm - M22x1,5 F



AR41 - "B" SST. COUPLER M22- 3 PCS.- BSP

P/N	Inlet	Weight		
		gr	oz	
26.0230.40	3/8 Bsp F	125	4,41	5
Rated Pressure		250 bar - 25 MPa		3650 psi
Permissible Pressure		280 bar - 28 MPa		4050 psi
Rated Flow		40 l/min		10,5 USGpm
Rated Temperature		160 °C		320 °F
Material		Stainless steel 303		

Pin Ø14 mm - M22x1,5 F





AR1 - "A" NIPPLE - 2×M22 - Ø14MM - WITH KNOB

P/N	Inlet	Weight			
		gr	oz		
26.0055.00	A 2× M22	176	6,21	25	✓
Rated Pressure	250 bar - 25 MPa	3650 psi			
Permissible Pressure	280 bar - 28 MPa	4050 psi			
Rated Flow	40 l/min	10,5 USGpm			
Rated Temperature	160 °C	320 °F			

Pin Ø14 mm - M22×1,5 M



AR1 - "A" NIPPLE M21- Ø14MM - BSP

P/N	Inlet	Weight			
		gr	oz		
26.0043.31	1/8 Bsp F	65	2,3	10	
26.0044.31	1/4 Bsp M	65	2,3	10	✓
26.0045.31	1/4 Bsp F	56	1,98	10	✓
26.0046.31	3/8 Bsp M	49	1,73	10	✓
26.0047.31	3/8 Bsp F	65	2,3	10	✓
26.0049.31	1/2 Bsp F	65	2,3	10	
26.0065.31	M18 x 1,5 mm Ermeto	65	2,3	10	
26.0062.31	M21 M	70	2,4	10	
Rated Pressure	250 bar - 25 MPa	3650 psi			
Permissible Pressure	280 bar - 28 MPa	4050 psi			
Rated Flow	40 l/min	10,5 USGpm			
Rated Temperature	160 °C	320 °F			

Pin Ø14 mm - M21×1,5 M



AR1 - "B" COUPLER M21 2 PCS. - BSP

P/N	Inlet	Weight			
		gr	oz		
26.0155.30	1/4 Bsp M	66	2,33	10	
Rated Pressure	250 bar - 25 MPa	3650 psi			
Permissible Pressure	280 bar - 28 MPa	4050 psi			
Rated Flow	40 l/min	10,5 USGpm			
Rated Temperature	160 °C	320 °F			

Pin Ø14 mm - M21×1,5 F



AR1 - "B" COUPLER M21- 3 PCS.- BSP

P/N	Inlet	Weight			
		gr	oz		
26.0270.30	1/4 Bsp M	104	3,67	25	✓
26.0270.20	1/4 Bsp F	118	4,16	25	✓
26.0270.50	3/8 Bsp M	110	3,88	25	✓
26.0270.40	3/8 Bsp F	118	4,16	25	✓
Rated Pressure	250 bar - 25 MPa	3650 psi			
Permissible Pressure	280 bar - 28 MPa	4050 psi			
Rated Flow	40 l/min	10,5 USGpm			
Rated Temperature	160 °C	320 °F			

Pin Ø14 mm - M21×1,5 F - non-revolving pin



AR1 - "B" COUPLER M21- 3 PCS. ROTATING PIN - BSP

P/N	Inlet	Weight			
		gr	oz		
26.0270.41	3/8 Bsp F	112	33,9	10	
Rated Pressure	250 bar - 25 MPa				3650 psi
Permissible Pressure	280 bar - 28 MPa				4050 psi
Rated Flow	40 l/min				10,5 USGpm
Rated Temperature	160 °C				320 °F



Pin Ø14 mm - M21×1,5 F

AR1 - "A" NIPPLE M22 - Ø14MM - NPT

P/N	Inlet	Weight			
		gr	oz		
26.0080.31	1/4 Npt M	65	2,3	25	✓
26.0081.31	1/4 Npt F	65	2,3	25	✓
26.0079.31	3/8 Npt M	65	2,3	25	✓
26.0082.31	3/8 Npt F	71	2,5	25	✓
26.0083.31	1/2 Npt M	65	2,3	25	
Rated Pressure	250 bar - 25 MPa				3650 psi
Permissible Pressure	280 bar - 28 MPa				4050 psi
Rated Flow	40 l/min				10,5 USGpm
Rated Temperature	160 °C				320 °F



Pin Ø14 mm - M22×1,5 M

AR1 - "B" COUPLER M22- 3 PCS.- NPT

P/N	Inlet	Weight			
		gr	oz		
26.0240.30	1/4 Npt M	106	3,74	25	✓
26.0240.20	1/4 Npt F	117	4,13	25	✓
26.0240.50	3/8 Npt M	110	3,88	25	✓
26.0240.40	3/8 Npt F	118	4,16	25	✓
Rated Pressure	250 bar - 25 MPa				3650 psi
Permissible Pressure	280 bar - 28 MPa				4050 psi
Rated Flow	40 l/min				10,5 USGpm
Rated Temperature	160 °C				320 °F



Pin Ø14 mm - M22×1,5 F

AR1 - "A" NIPPLE 1/2 BSP M -Ø14 MM -BSP

P/N	Inlet	Mat.	Weight			
			gr	oz		
26.0122.31	3/8 Bsp M	Brass	50	1,76	5	✓
Rated Pressure	250 bar - 25 MPa					3650 psi
Permissible Pressure	280 bar - 28 MPa					4050 psi
Rated Flow	40 l/min					10,5 USGpm
Rated Temperature	160 °C					320 °F



Pin Ø14 mm - 1/2 Bsp M



AR1 - "A" NIPPLE 1/2 BSP M - Ø15MM - BSP

P/N	Inlet	Mat.	Weight				
			gr	oz			
26.0113.31	1/4 Bsp F	Brass	52	1,83	10		
Rated Pressure			250 bar - 25 MPa		3650 psi		
Permissible Pressure			280 bar - 28 MPa		4050 psi		
Rated Flow			40 l/min		10,5 USGpm		
Rated Temperature			160 °C		320 °F		



Pin Ø15 mm - 1/2 Bsp M

AR1 - "B" COUPLER 1/2 BSP F 2 PCS. -BSP

P/N	Inlet	Weight				
		gr	oz			
26.0110.20	1/4 Bsp F	64	2,26	25		
Rated Pressure		250 bar - 25 MPa		3650 psi		
Permissible Pressure		280 bar - 28 MPa		4050 psi		
Rated Flow		40 l/min		10,5 USGpm		
Rated Temperature		160 °C		320 °F		



Pin Ø15 mm - 1/2 Bsp F

AR1 - "B" COUPLER 2PCS M22 - Ø15MM - BSP

P/N	Inlet	Weight				
		gr	oz			
26.9152.98	1/4 Bsp F	64	2,3	5		
Rated Pressure		250 bar - 25 MPa		3650 psi		
Permissible Pressure		280 bar - 28 MPa		4050 psi		
Rated Flow		40 l/min		10,5 USGpm		
Rated Temperature		160 °C		320 °F		



Pin Ø15 mm - M22×1,5 F

AR1 - "B" COUPLER M22 - 3 PCS. - Ø15MM -BSP

P/N	Inlet	Weight				
		gr	oz			
26.0281.00	M22	110	3,88	5		
26.0281.40	3/8 Bsp F	126	4,44	10		
26.0281.50	3/8 Bsp M	102	3,6	10		
Rated Pressure		250 bar - 25 MPa		3650 psi		
Permissible Pressure		280 bar - 28 MPa		4050 psi		
Rated Flow		40 l/min		10,5 USGpm		
Rated Temperature		160 °C		320 °F		



Pin Ø15 mm - M22×1,5 F

AR5 - "A" EXTENDED NIPPLE TYPE M22-2 O-RINGS - BSP

P/N	Inlet	Weight				
		gr	oz			
26.1020.31	1/4 Bsp M	59	2,08	25	✓	
26.1032.31	1/4 Bsp F	78	2,75	25	✓	
26.1019.31	3/8 Bsp M	80	2,8	25	✓	
26.1037.31	3/8 Bsp F	80	2,8	25	✓	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Pin Ø14 mm M22×1,5 M



AR5 - "B" EXTENDED COUPLER M22 2 PCS. 2 O-RINGS -BSP

P/N	Inlet	Type	Hand nut	Weight				
				gr	oz			
26.1029.00	1/4 Bsp M	Revolving	AR1 type	70	2,47	25	✓	
Revolving connection								
26.1025.00	1/4 Bsp M	Revolving	AR1 type	66	2,33	10	✓	
Revolving connection -sst piston								
26.1028.00	1/4 Bsp F	Fixed	AR1 type	74	2,61	25		
26.9950.98	1/4 Bsp F	Fixed	AR4 type	90	3,1	25		
26.1035.00	3/8 Bsp M	Fixed	AR1 type	82	2,89	25		

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Material		Brass

Pin Ø14 mm - M22×1,5 F



AR5 - "B" EXTENDED COUPLER M22 - 3PCS. 2 O-RINGS - BSP

P/N	Inlet	Type	Weight				
			gr	oz			
26.1034.50	1/4 Bsp M	Revolving	108	3,81	25	✓	
26.1034.20	1/4 Bsp F	Revolving	121	4,27	25	✓	
26.1034.00	3/8 Bsp M	Revolving	115	4,06	25	✓	
26.1033.00	3/8 Bsp F	Revolving	130	4,6	25	✓	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Revolving pin Ø14 mm- M22×1,5 F






AR4 - COUPLER M22 +HEXAGONAL JOINT - BSP

P/N	Type	Inlet	Weight			
			gr	oz		
26.0220.00	B 2 pcs	1/4 Bsp F	80	2,82	25	✓
26.0225.31	A	1/4 Bsp F	70	2,4	25	
26.0199.31	A1	1/4 Bsp M	70	2,4	10	✓
10.3185.00	C	Nbr	0,5	0,02	10	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Pin Ø14 mm - M22×1,5 F with hexagonal joint and external O-ring to prevent unscrewing




AR3 - COUPLER M22 +HEXAGONAL JOINT - BSP

P/N	Type	Inlet	Weight			
			gr	oz		
26.0205.00	B 2 pcs	1/4 Bsp F	74	2,61	25	✓
26.0199.31	A	1/4 Bsp M	70	2,4	10	✓
26.0200.31	A	1/4 Bsp F	74	2,61	25	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Pin Ø14 mm - M22×1,5 F with hexagonal joint




AR3/23 - COUPLER M22 + HEXAGONAL JOINT - BSP

P/N	Type	Inlet	Weight			
			gr	oz		
26.0210.00	B 2 pcs	1/4 Bsp F	108	3,81	5	✓
26.0199.31	A	1/4 Bsp M	70	2,4	10	✓
26.0200.31	A	1/4 Bsp F	70	2,4	25	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Pin Ø14 mm - M22×1,5 F with hexagonal joint



ARG - REVOLVING COUPLER TYPE "B" M22 - 1 O-RING

P/N	Inlet	Type	Weight			
			gr	oz		
26.0900.00	1/4 Bsp M	B 2 pcs	133	4,69	15	✓
26.0910.00	A M22	B 3 pcs	192	6,77	15	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Pin Ø14 mm - M22×1,5 F - revolving even under pressure - suitable for connecting spray gun and lance



AR7 - "A" NIPPLE 1/2 BSP M - BSP

P/N	Inlet	Hole size		Weight			
		mm	in	gr	oz		
26.0700.30	1/4 Bsp M	11	0,433	55	1,9	25	✓
26.0700.20	1/4 Bsp F	11	0,433	71	2,5	25	✓
26.0700.50	3/8 Bsp M	11	0,433	62	2,19	25	✓
26.0700.40	3/8 Bsp F	11	0,433	72	2,54	25	✓

Rated Pressure 250 bar - 25 MPa 3650 psi
 Permissible Pressure 280 bar - 28 MPa 4050 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 160 °C 320 °F

Pin Ø11mm



AR7 - "B" COUPLER 1/2 BSP F - 3 PCS. - BSP

P/N	Inlet	Hole size		Weight			
		mm	in	gr	oz		
26.0750.30	1/4 Bsp M	11	0,433	93	3,3	25	✓
26.0750.20	1/4 Bsp F	11	0,433	99	3,49	25	✓
26.0750.50	3/8 Bsp M	11	0,433	100	3,53	25	✓
26.0750.40	3/8 Bsp F	11	0,433	110	3,9	25	✓

Rated Pressure 250 bar - 25 MPa 3650 psi
 Permissible Pressure 280 bar - 28 MPa 4050 psi
 Rated Flow 40 l/min 10,5 USGpm
 Rated Temperature 160 °C 320 °F

Pin Ø11mm



AR8- COUPLER 350 BAR M24 - 2 O-RINGS - BSP

P/N	Inlet	Type	Weight			
			gr	oz		
26.0630.20	1/4 Bsp F	A	96	3,39	10	✓
26.0630.40	3/8 Bsp F	A	88	3,1	10	✓
26.0630.50	3/8 Bsp M	A	76	2,68	10	✓
26.0615.20	1/4 Bsp F	B 2 pcs	88	3,1	5	✓
Coupling for outlet spray gun.						
26.0650.30	1/4 Bsp M	B 3 pcs	126	4,44	10	✓
26.0650.50	3/8 Bsp M	B 3 pcs	135	4,76	10	✓

Rated Pressure 350 bar - 35 MPa 5100 psi
 Permissible Pressure 390 bar - 39 MPa 5650 psi
 Rated Flow 30 l/min 8 USGpm
 Rated Temperature 160 °C 320 °F

Pin Ø14 mm - M24×1,5 F



AR200- COUPLER 350 BAR M30 - 2 O-RINGS - BSP

P/N	Inlet	Type	Weight			
			gr	oz		
26.0840.60	3/4 Bsp F	A	147	5,2	2	
26.0850.60	3/4 Bsp F	B 3 pcs	410	14,5	2	

Rated Pressure 350 bar - 35 MPa 5100 psi
 Permissible Pressure 390 bar - 39 MPa 5650 psi
 Rated Flow 200 l/min 53 USGpm
 Rated Temperature 60 °C 140 °F

Pin Ø21,5 mm - M30×1,5 F





AR9 - COUPLER 600 BAR M24 - 2 O-RINGS - BSP **NEW**

P/N	Inlet	Type	Weight			
			gr	oz		
26.0940.40	3/8 Bsp F	A	82	2,89	10	✓
26.0940.50	3/8 Bsp M	A	71	2,5	10	✓
26.0940.70	1/2 Bsp M	A	74	2,61	10	✓
26.0940.80	M24 M	A	87	3,07	10	
26.0950.40	3/8 Bsp F	B 3 pcs	145	5,1	10	✓
26.0950.30	1/4 Bsp M	B 3 pcs	136	4,8	10	
26.0950.50	3/8 Bsp M	B 3 pcs	142	5	10	✓
26.0950.70	1/2 Bsp M	B 3 pcs	145	5,1	10	✓

Rated Pressure	600 bar - 60 MPa	8700 psi
Permissible Pressure	660 bar - 66 MPa	9500 psi
Rated Flow	80 l/min	21 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel	

Pin Ø15 mm - M24×1,5 F



BAYONET COUPLING - 14 MM

P/N	Inlet	Type	Weight			
			gr	oz		
26.0605.00	1/4 Bsp F	A	42	1,48	10	✓
26.0604.31	1/4 Bspt M taper 60°	B	84	2,96	10	✓

Rated Pressure	120 bar - 12 MPa	1750 psi
Permissible Pressure	140 bar - 14 MPa	2000 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Material	Brass	

Pin Ø14 mm



BAYONET COUPLING - 14 MM

P/N	Inlet	Type	Weight			
			gr	oz		
26.0590.00	1/4 Bsp F	A	50	1,76	10	✓

Rated Pressure	160 bar - 16 MPa	2300 psi
Permissible Pressure	180 bar - 18 MPa	2600 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Material	Brass	

Pin Ø14 mm



BAYONET COUPLING - 8 MM

P/N	Inlet	Weight			
		gr	oz		
26.0606.00	1/4 Bsp F	100	3,53	10	✓
26.0610.00	1/4 Bspt M	116	4,09	10	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Material	Brass	

Pin Ø 8 mm



ARS 178 L - BALL-TYPE QUICK COUPLING 12,5 MPA -SST

P/N	Inlet	Type	Weight			
			gr	oz		
26.2500.10	3/8 Bsp F	B	105	3,7	5	✓
26.2500.30	1/2 Bsp F	B	132	4,66	5	✓
26.2500.40	1/2 Bsp M	B	140	4,94	5	✓
26.2530.00	1/4 Bsp F	A	50	1,7	5	✓
26.2530.10	3/8 Bsp F	A	50	1,7	5	✓
26.2530.30	1/2 Bsp F	A	86	3,03	5	✓
26.2530.40	1/2 Bsp M	A	50	1,7	5	✓
Rated Pressure			125 bar - 12,5 MPa		1825 psi	
Permissible Pressure			140 bar - 14 MPa		2025 psi	
Rated Flow			50 l/min		13,2 USGpm	
Rated Temperature			90 °C		195 °F	
Material			Stainless steel			

Pin Ø17,8 mm - Internal hole Ø12 mm



ARS 220 - BALL-TYPE QUICK COUPLING 220 BAR **NEW**

P/N	Inlet	Type	Weight			
			gr	oz		
26.2030.20	1/4 Bsp F	B	184	6,49	25	
26.2030.25	1/4 Bsp M	B	196	6,91	25	
26.2030.00	3/8 Bsp F	B	173	6,12	25	✓
26.2030.80	M 22 F	B	156	5,5	25	✓
26.2040.61	1/4 Bsp F	A	69	2,43	25	✓
26.2045.61	1/4 Bsp M	A	60	2,12	25	
26.2035.61	3/8 Bsp F	A	58	2,05	25	✓
Rated Pressure			220 bar - 22 MPa		3200 psi	
Permissible Pressure			250 bar - 25 MPa		3650 psi	
Rated Flow			50 l/min		13,2 USGpm	
Rated Temperature			90 °C		195 °F	

Pin Ø19,9 mm - Internal hole Ø12 mm- Compatible with ARS350



ARS 178 - BALL-TYPE QUICK COUPLING 25 MPA -SST

P/N	Inlet	Type	Weight			
			gr	oz		
26.2500.10	3/8 Bsp F	B	105	3,7	5	✓
26.2500.30	1/2 Bsp F	B	132	4,66	5	✓
26.2500.40	1/2 Bsp M	B	140	4,94	5	✓
26.2520.00	1/4 Bsp F	A	47	1,66	5	✓
26.2520.10	3/8 Bsp F	A	50	1,7	5	✓
26.2520.30	1/2 Bsp F	A	87	3,07	5	✓
26.2520.40	1/2 Bsp M	A	60	2,12	5	✓
Rated Pressure		250 bar - 25 MPa			3650 psi	
Permissible Pressure		280 bar - 28 MPa			4050 psi	
Rated Flow		50 l/min			13,2 USGpm	
Rated Temperature		90 °C			195 °F	
Material		Stainless steel				

Pin in hardened stainless steel Ø17,8 mm - Internal hole Ø12 mm





ARS 178 P - BALL-TYPE QUICK COUPLING 25 MPA -SST

P/N	Inlet	Type	Weight			
			gr	oz		
26.2555.30	1/2 Bsp F	B	154	5,43	5	✓
26.2555.40	1/2 Bsp M	B	164	5,78	5	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	50 l/min	13,2 USGpm
Rated Temperature	90 °C	195 °F
Material	Stainless steel	
Casing colour	Blue	

Pin in hardened stainless steel Ø17,8 mm - Internal hole Ø12 mm



ARS 250 - BALL-TYPE QUICK COUPLING 250 BAR

P/N	Inlet	Type	Weight			
			gr	oz		
26.2010.20	1/4 Bsp F	B	114	4,02	25	✓
26.2010.00	3/8 Bsp M	B	101	3,56	25	✓
26.2010.10	3/8 Bsp F	B	118	4,16	25	✓
26.2010.40	1/2 Bsp M	B	114	4,02	25	✓
26.2010.30	1/2 Bsp F	B	123	4,34	25	✓
26.2016.61	1/4 Bsp F	A	45	1,59	25	✓
26.2023.61	3/8 Bsp M	A	44	1,55	25	✓
26.2015.61	3/8 Bsp F	A	50	1,7	25	✓
26.2024.61	1/2 Bsp M	A	52	1,83	25	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F

Pin Ø15 mm - Internal hole Ø8,5 mm



ARS 23 - SST BALL-TYPE QUICK COUPLING

P/N	Inlet	Type	Weight			
			gr	oz		
26.2300.00	1/4 Bsp F	B	278	9,81	5	✓
26.2350.51	1/4 Bsp F	A	116	4,1	5	✓
26.2360.51	1/4 Bsp M	A	115	4,1	5	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F
Material	Stainless steel	

Pin Ø14 mm - Internal hole Ø8 mm



ARS 25 -BALL-TYPE QUICK COUPLING - KW

P/N	Inlet	Type	Mat.	Weight			
				gr	oz		
26.2400.00	1/4 Bsp F	B	Sst.+ brass	290	10,23	5	
26.2400.60	1/4 Bsp M	B1	Sst.+ brass	270	9,52	5	✓
26.2450.51	1/4 Bsp F	A	St. steel	68	2,4	5	✓
26.2453.51	1/4 Bsp M	A1	St. steel	82	2,89	5	✓
26.2451.51	1/4 Bsp F x R5	A2	St. steel	74	2,61	3	✓

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Pin Ø12 mm (0,47") - Internal hole Ø7 mm (0,28")




ARS 25 P -BALL-TYPE QUICK COUPLING - KW

P/N	Inlet	Type	Mat.	Weight			
				gr	oz		
26.2410.60	1/4 Bsp M	B	Brass	232	8,18	5	✓
Rated pr. 250bar – 25MPa – 3650psi Permiss.press. 280bar – 28MPa – 4050psi							
26.2415.60	1/4 Bsp M	B1	Sst.+ brass	232	8,18	5	
Rated pr. 250bar – 25MPa – 3650psi Permiss.press. 280bar – 28MPa – 4050psi							
26.2440.60	1/4 Bsp M	B2	St. steel	216	7,62	5	✓
Rated pr. 310bar – 31MPa – 4500psi Permiss.press. 350bar – 35MPa – 5100psi							
26.2450.51	1/4 Bsp F	A	St. steel	68	2,4	5	✓
Rated pr. 310bar – 31MPa – 4500psi Permiss.press. 350bar – 35MPa – 5100psi							
26.2451.51	1/4 Bsp F x R5	A1	St. steel	68	2,4	3	✓
Rated pr. 310bar – 31MPa – 4500psi Permiss.press. 350bar – 35MPa – 5100psi							

Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Pin Ø12 mm (0,47") - Internal hole Ø7 mm (0,28")

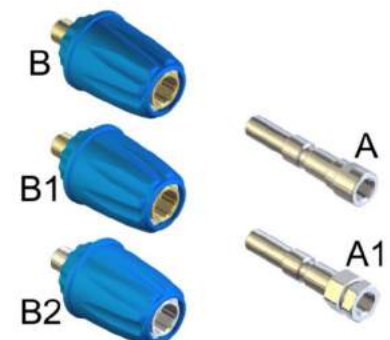

ARSU - BALL-TYPE QUICK COUPLING FOR "Q-STYLE"-NOZZLE

P/N	Inlet	Hole size		Weight			
		mm	in	gr	oz		
26.2060.00	1/4 Npt F	12	0,47	68	2,4	25	✓

Rated Pressure	310 bar - 31 MPa	4500 psi
Permissible Pressure	350 bar - 35 MPa	5000 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	160 °C	320 °F

Pin Ø12 mm





Ball-type quick couplings


ARS250-35MPa-SST BALL-TYPE QUICK COUPLING 35MPa

NEW

P/N	Inlet	Type	Weight			
			gr	oz		
26.2005.00	3/8 Bsp M	B	101	3,56	25	 
26.2005.10	3/8 Bsp F	B1	118	4,16	25	
26.2006.51	3/8 Bsp M	A	44	1,55	25	
26.2007.51	3/8 Bsp F	A1	50	1,7	25	

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Material	Stainless steel	

Pin Ø15 mm - Internal hole Ø8,5 mm

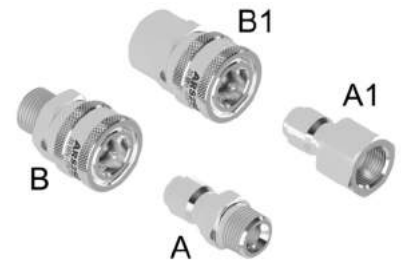


ARS 350 -STAINLESS STEEL BALL-TYPE QUICK COUPLING 350 BAR

NEW

P/N	Inlet	Type	Mat.	Weight			
				gr	oz		
26.2045.51	1/4 Bsp M	A	St. steel	59	2,08	25	 
26.2040.51	1/4 Bsp F	A	St. steel	68	2,4	25	
26.2048.51	3/8 Bsp M	A	St. steel	74	2,61	25	
26.2035.51	3/8 Bsp F	A	St. steel	57	2,01	25	
26.2050.20	1/4 Bsp F	B	St. steel	166	5,85	25	
26.2050.25	1/4 Bsp M	B	St. steel	158	5,59	25	
26.2050.00	3/8 Bsp F	B	St. steel	158	5,57	25	

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	50 l/min	13,2 USGpm
Rated Temperature	90 °C	195 °F

Pin Ø19,9 mm - Internal hole Ø12 mm - Compatible with ARS220



ARS 350 P -STAINLESS STEEL BALL-TYPE QUICK COUPLING 35MPa

P/N	Inlet	Type	Mat.	Weight			
				gr	oz		
26.2055.25	1/4 Bsp M	B	St. steel	192	6,77	25	 

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	50 l/min	13,2 USGpm
Rated Temperature	90 °C	195 °F
Casing colour	Black	

Pin Ø19,9 mm - Internal hole Ø12 mm



SW65 - LARGE FLOW BALL SWIVEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.6480.00	1/2 Bsp F	1/2 Bsp M	120	4,23	5	✓
Rated Pressure			24 bar - 2,4 MPa		350 psi	
Rated Flow			100 l/min		26,5 USGpm	
Rated Temperature			100 °C		212 °F	
Max. working temperature			90 °C		194 °F	
Max. RPM					30 giri/min	
Material					Brass	



SW5- LARGE FLOW SWIVEL

P/N	Inlet	Outlet	Mat.	Weight			
				gr	oz		
26.1070.00	1/2 Bsp M	1/2 Bsp F	Sst Ai 303	102	3,6	10	✓
26.1076.00	1/2 Bsp M	1/2 Bsp F	Sst Ai 316L	102	3,6	5	✓
26.1080.00	1/2 Bsp M	1/2 Bsp F	Brass	117	4,13	10	✓
Rated Pressure		200 bar - 20 MPa		2900 psi			
Permissible Pressure		220 bar - 22 MPa		3200 psi			
Rated Flow		160 l/min		42 USGpm			
Rated Temperature		90 °C		194 °F			
Max. temperature for short		160 °C		320 °F			



LR - LIGHT DUTY SWIVEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1000.00	3/8 Bsp M	3/8 Bsp F	75	2,65	10	✓
26.1000.05	3/8 Bsp M	1/4 Bsp F	82	2,89	10	✓
26.1000.10	3/8 Npt M	3/8 Npt F	76	2,6	10	✓
Rated Pressure			220 bar - 22 MPa		3200 psi	
Permissible Pressure			250 bar - 25 MPa		3650 psi	
Rated Flow			30 l/min		8 USGpm	
Rated Temperature			90 °C		195 °F	
Max. working temperature			60 °C		140 °F	
Material					Brass	



MR-O - BRASS SWIVEL


P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1040.00	1/4 Bspt M taper 60°	1/4 Bsp F	173	6,1	10	✓
26.1050.00	3/8Bspt M taper 60°	3/8 Bsp F	173	6,1	10	✓
26.1055.00	1/2 Bsp M	1/2 Bsp F	216	7,62	10	✓
Rated Pressure			250 bar - 25 MPa		3650 psi	
Permissible Pressure			280 bar - 28 MPa		4050 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	
Max. working temperature			90 °C		194 °F	
Material					Brass	





SWIVEL FOR HIGH PRESSURE HOSE REEL -SST/BRASS

P/N	Type	Fitting	Inlet	Outlet	Material	Weight			
						gr	oz		
26.1100.20	A	2 seeger	3/8 Bsp M	3/8 Bsp M	Brass	386	13,62	5	✓
26.1100.30	B	3 seeger	3/8 Bsp M	3/8 Bsp M	Brass	386	13,62	5	
26.1150.00	C	2 seeger	3/8 Bsp M	3/8 Bsp M	Stainless steel 303	386	13,62	3	
Rated Pressure		250 bar - 25 MPa		3650 psi					
Permissible Pressure		280 bar - 28 MPa		4050 psi					
Rated Flow		40 l/min		10,5 USGpm					
Rated Temperature		160 °C		320 °F					
Max. working temperature		90 °C		194 °F					



SW25 - SST. BALL BEARING SWIVEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1200.20	1/4 Bsp M	1/4 Bsp F	147	5,18	5	✓
26.1200.42	1/4 Bsp M	3/8 Bsp F	155	5,5	5	✓
26.1200.22	3/8 Bsp M	1/4 Bsp F	146	5,15	5	✓
26.1200.40	3/8 Bsp M	3/8 Bsp F	155	5,5	5	✓
26.1200.45	3/8 Bsp F	3/8 Bsp F	198	6,98	5	✓
26.1200.28	3/8 Bsp F	1/4 Bsp F	190	6,7	5	✓
Rated Pressure		250 bar - 25 MPa		3650 psi		
Permissible Pressure		280 bar - 28 MPa		4050 psi		
Rated Flow		40 l/min		10,5 USGpm		
Rated Temperature		120 °C		250 °F		
Max. working temperature		90 °C		194 °F		
Max. RPM				30 giri/min		
Material				Sst.+ nick.pl. brass		



SW25-E - SST. BALL BEARING SWIVEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1250.20	1/4 Bsp M	1/4 Bsp F	148	5,22	5	
26.1250.40	3/8 Bsp M	3/8 Bsp F	155	5,5	5	✓
Rated Pressure		250 bar - 25 MPa		3650 psi		
Permissible Pressure		280 bar - 28 MPa		4050 psi		
Rated Flow		40 l/min		10,5 USGpm		
Rated Temperature		120 °C		250 °F		
Max. working temperature		90 °C		194 °F		
Max. RPM				30 giri/min		
Material				Sst.+ nick.pl. brass		
Seals material				Epdm		



Sturdy construction in nickel-plated brass and stainless steel, with compact dimensions with high performance.
EPDM seals ensure chemical compatibility of the swivels with detergents which can damage standard Viton seals.

SW90 - 90° SWIVEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1300.20	1/4 Bsp M	1/4 Bsp F	195	7	5	✓
26.1300.40	3/8 Bsp M	3/8 Bsp F	187	6,6	5	✓
26.1300.42	3/8 Bsp M	1/4 Bsp F	198	6,98	5	
Rated Pressure			250 bar - 25 MPa		3650 psi	
Permissible Pressure			280 bar - 28 MPa		4050 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	
Max. working temperature			90 °C		194 °F	
Max. RPM					30 giri/min	
Screw material					Stainless steel	



SW90- E - 90° SWIVEL EPDM

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1350.20	1/4 Bsp M	1/4 Bsp F	195	7	5	✓
Rated Pressure			250 bar - 25 MPa		3650 psi	
Permissible Pressure			280 bar - 28 MPa		4050 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	
Max. working temperature			90 °C		194 °F	
Max. RPM					30 giri/min	
Screw material					Stainless steel	
Seals material					Epdm	



Sturdy construction in nickel-plated brass and stainless steel, with compact dimensions with high performance.

EPDM seals ensure chemical compatibility of the swivels with detergents which can damage standard Viton seals.

MR-I - STAINLESS STEEL SWIVEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1060.00	1/4 Bspt M taper 60°	1/4 Bsp F	162	5,71	10	✓
26.1061.00	3/8Bspt M taper 60°	3/8 Bsp F	160	5,64	10	✓
26.1060.50	1/4 Npt M	1/4 Npt F	168	5,93	10	✓
26.1061.50	3/8 Npt M	3/8 Npt F	166	5,85	10	✓
26.1062.00	3/8Bspt M taper 60°	1/4 Bsp F	168	5,93	10	
Rated Pressure			350 bar - 35 MPa		5100 psi	
Permissible Pressure			390 bar - 39 MPa		5650 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			160 °C		320 °F	
Max. working temperature			90 °C		194 °F	
Max. RPM					30 giri/min	
Material					Stainless steel	





SW35 - SST. BALL BEARING SWIVEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1412.40	3/8 Bsp M	3/8 Bsp F	489	17,25	1	✓
26.1412.43	3/8 Bsp M	3/8 Bsp M	461	16,26	1	✓
26.1412.45	3/8 Bsp F	3/8 Bsp F	585	20,64	1	✓
26.1412.48	3/8 Bsp F	3/8 Bsp M	544	19,19	1	✓

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	120 °C	250 °F
Max. working temperature	90 °C	194 °F
Max. RPM		2000 giri/min
Material	Sst. + nick.pl. brass	



SW90 - 90° STAINLESS STEEL SWIVEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1320.00	1/2 Bsp M	1/2 Bsp F	437	15,41	5	✓

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	80 l/min	21 USGpm
Rated Temperature	160 °C	320 °F
Max. working temperature	90 °C	194 °F
Max. RPM		30 giri/min
Material	Stainless steel	



SW 600 -660 BAR- STAINLESS STEEL SWIVEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
30.5840.00	3/8 Bsp F	3/8 Bsp M	400	14,11	1	

Rated Pressure	600 bar - 60 MPa	8700 psi
Permissible Pressure	660 bar - 66 MPa	9570 psi
Rated Flow	60 l/min	15,8 USGpm
Rated Temperature	100 °C	212 °F
Max. working temperature	90 °C	194 °F
Max. RPM		30 giri/min
Material	Stainless steel	



SW90-600 - 90° STAINLESS STEEL SWIVEL

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1330.00	1/2 Bsp M	1/2 Bsp F	636	22,43	2	✓

Rated Pressure	600 bar - 60 MPa	8700 psi
Permissible Pressure	660 bar - 66 MPa	9570 psi
Rated Flow	80 l/min	21 USGpm
Max. working temperature	90 °C	194 °F
Max. RPM		30 giri/min
Material	Stainless steel	



FOAM INJECTOR

P/N	Inlet	Outlet	Nozzle	Weight			
			mm	gr	oz		
21.0800.25	1/4 Bsp F	1/4 Bspt M	2,5	49	1,73	5	✓
Rated Pressure		120 bar - 12 MPa		1750 psi			
Rated Flow		40 l/min		10,5 USGpm			
Material		Stainless steel 303					



EXTENDED CHEMICAL INJECTOR 3/8 BSP MM

P/N	Nozzle	Col.	Hose barb		Weight			
	mm		mm	in	gr	oz		
21.0600.12	1,2	Black	7	0,27	314	11,07	1	
21.0600.14	1,4	Red	7	0,27	315	11,11	1	
21.0600.18	1,8	Blue	7	0,27	315	11,11	1	
21.0600.21	2,1	Blue	7	0,27	300	10,6	1	
Rated Pressure		220 bar - 22 MPa				3200 psi		
Permissible Pressure		250 bar - 25 MPa				3650 psi		
Rated Flow		30 l/min				8 USGpm		
Rated Temperature		90 °C				195 °F		
Inlet		3/8 Bsp M						
Outlet		3/8 Bsp M						
Material		Brass						
Type		Adjust.						



Injector with high suction power


CHEMICAL INJECTOR 3/8 BSP MM

P/N	Type	Nozzle		Hose barb		Weight			
		mm	mm	in	gr	oz			
21.0000.00	Fixed	0	7	0,27	136	4,8	15	✓	
21.0000.18	Fixed	1,8	7	0,27	140	4,9	15	✓	
21.0000.21	Fixed	2,1	7	0,27	140	4,9	15	✓	
21.0000.23	Fixed	2,3	7	0,27	140	4,9	15	✓	
21.0000.25	Fixed	2,5	7	0,27	140	4,9	15		
21.0150.02	Adjust.	0	7	0,27	160	5,64	15	✓	
21.0150.18	Adjust.	1,8	7	0,27	162	5,71	15	✓	
21.0150.21	Adjust.	2,1	7	0,27	162	5,71	15	✓	
21.0150.23	Adjust.	2,3	7	0,27	162	5,71	15	✓	
Rated Pressure		280 bar - 28 MPa				4050 psi			
Permissible Pressure		310 bar - 31 MPa				4500 psi			
Rated Flow		30 l/min				8 USGpm			
Rated Temperature		90 °C				195 °F			
Inlet		3/8 Bsp M							
Outlet		3/8 Bsp M							



CHEMICAL INJECTOR 3/8 BST-P MM-H.BARB SW.

P/N	Type	Nozzle		Hose barb		Weight			
		mm	mm	in	gr	oz			
21.0080.21	(A) Fixed	2,1	7	0,27	155	5,47	15		
21.0130.21	(B) Adjust.	2,1	7	0,27	160	5,64	12		
Rated Pressure		280 bar - 28 MPa			4050 psi				
Permissible Pressure		310 bar - 31 MPa			4500 psi				
Rated Flow		30 l/min			8 USGpm				
Rated Temperature		90 °C			195 °F				
Inlet					3/8 Bsp M				
Outlet					3/8 Bsp M				





CHEMICAL INJECTOR 3/8NPT MM

P/N	Type	Nozzle	Hose barb		Weight			
		mm	mm	in	gr	oz		
21.0012.18	Fixed	1,8	7	0,27	140	4,9	15	✓
21.0012.21	Fixed	2,1	7	0,27	142	5,01	15	✓
21.0012.23	Fixed	2,3	7	0,27	140	4,9	15	✓
21.0154.15	Adjust.	1,5	7	0,27	164	5,78	15	
21.0154.18	Adjust.	1,8	7	0,27	164	5,78	15	✓
21.0154.21	Adjust.	2,1	7	0,27	164	5,78	15	✓
21.0154.23	Adjust.	2,3	7	0,27	164	5,78	15	✓
Rated Pressure		280 bar - 28 MPa		4050 psi				
Permissible Pressure		310 bar - 31 MPa		4500 psi				
Rated Flow		30 l/min		8 USGpm				
Rated Temperature		90 °C		195 °F				
Inlet				3/8 Npt M				
Outlet				3/8 Npt M				



CHEMICAL INJECTOR 3/8NPT MM EPDM O-RING

NEW

P/N	Type	Nozzle	Hose barb		Weight			
		mm	mm	in	gr	oz		
21.0145.18	Adjust.	1,8	7	0,27	164	5,78	15	
21.0145.21	Adjust.	2,1	7	0,27	164	5,78	15	
21.0145.23	Adjust.	2,3	7	0,27	164	5,78	15	
Rated Pressure		280 bar - 28 MPa		4050 psi				
Permissible Pressure		310 bar - 31 MPa		4500 psi				
Rated Flow		30 l/min		8 USGpm				
Rated Temperature		90 °C		195 °F				
Inlet				3/8 Npt M				
Outlet				3/8 Npt M				

Epdm O-rings



CHEMICAL INJECTOR 3/8 BSP FM

P/N	Type	Nozzle	Hose barb		Weight			
		mm	mm	in	gr	oz		
21.0015.12	Fixed	1,2	7	0,27	170	6	15	✓
21.0015.18	Fixed	1,8	7	0,27	170	6	15	✓
21.0015.21	Fixed	2,1	7	0,27	170	6	15	✓
21.0015.23	Fixed	2,3	7	0,27	170	6	15	✓
21.0170.15	Adjust.	1,5	7	0,27	193	6,81	15	
21.0170.18	Adjust.	1,8	7	0,27	192	6,77	15	✓
21.0170.21	Adjust.	2,1	7	0,27	192	6,77	15	✓
21.0170.23	Adjust.	2,3	7	0,27	192	6,77	15	✓
Rated Pressure		280 bar - 28 MPa		4050 psi				
Permissible Pressure		310 bar - 31 MPa		4500 psi				
Rated Flow		30 l/min		8 USGpm				
Rated Temperature		90 °C		195 °F				
Inlet				3/8 Bsp F				
Outlet				3/8 Bsp M				



CHEMICAL INJECTOR 3/8 BSP MF

P/N	Type	Nozzle	Hose barb		Weight			
		mm	mm	in	gr	oz		
21.0020.18	Fixed	1,8	7	0,27	152	5,36	15	✓
21.0020.21	Fixed	2,1	7	0,27	152	5,36	15	✓
21.0020.23	Fixed	2,3	7	0,27	152	5,36	15	
21.0175.18	Adjust.	1,8	7	0,27	175	6,17	15	
21.0175.21	Adjust.	2,1	7	0,27	175	6,17	15	✓
21.0175.23	Adjust.	2,3	7	0,27	174	6,14	15	✓
21.0175.25	Adjust.	2,5	7	0,27	174	6,14	15	
21.0175.27	Adjust.	2,7	7	0,27	174	6,14	15	

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Inlet		3/8 Bsp M
Outlet		3/8 Bsp F



CHEMICAL INJECTOR 3/8 BSP M × M22 M

P/N	Type	Nozzle	Hose barb		Weight			
		mm	mm	in	gr	oz		
21.0030.18	Fixed	1,8	7	0,27	137	4,83	15	✓
21.0030.21	Fixed	2,1	7	0,27	137	4,83	15	✓
21.0030.23	Fixed	2,3	7	0,27	137	4,83	15	
21.0180.18	Adjust.	1,8	7	0,27	160	5,64	15	✓
21.0180.21	Adjust.	2,1	7	0,27	160	5,64	15	✓
21.0180.23	Adjust.	2,3	7	0,27	160	5,64	15	✓

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Inlet		3/8 Bsp M
Outlet		AR1 A M22

Inlet 3/8 Bsp M - outlet M 21 M version available on request



CHEMICAL INJECTOR M22 × 1,5 FM

P/N	Type	Nozzle	Hose barb		Weight			
		mm	mm	in	gr	oz		
21.0035.18	Fixed	1,8	7	0,27	220	7,76	10	✓
21.0035.21	Fixed	2,1	7	0,27	250	8,8	10	
21.0185.18	Adjust.	1,8	7	0,27	243	8,57	10	✓
21.0185.21	Adjust.	2,1	7	0,27	243	8,57	10	
21.0185.23	Adjust.	2,3	7	0,27	243	8,57	10	

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Inlet		AR1 B M22
Outlet		AR1 A M22





SST EXTENDED CHEMICAL INJECTOR 3/8 BSP MM

P/N	Nozzle		Hose barb		Weight			
	mm	mm	in	gr	oz			
21.0500.12	1,2	7	0,27	282	9,95	1		
21.0500.14	1,4	7	0,27	282	9,95	1		
21.0500.18	1,8	7	0,27	282	9,95	1		
21.0500.21	2,1	7	0,27	282	9,95	1		

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4100 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Inlet		3/8 Bsp M
Outlet		3/8 Bsp M
Material	Stainless steel 303	
Type	Adjust.	

Injector with high suction power



SST CHEMICAL INJECTOR 3/8 BSP MM - TEFLON O-RING

P/N	Couplings	Type	Nozzle		Weight			
			mm	gr	oz			
21.0018.12	3/8 Bsp MM	Fixed	1,2	125	4,41	10	✓	
21.0018.15	3/8 Bsp MM	Fixed	1,5	125	4,41	10	✓	
21.0018.21	3/8 Bsp MM	Fixed	2,1	124	4,37	10	✓	
21.0018.68	3/8 Npt MM	Fixed	1,8	125	4,41	10	✓	
21.0018.71	3/8 Npt MM	Fixed	2,1	124	4,37	10		
21.0119.15	3/8 Bsp MM	Adjust.	1,5	146	5,15	10		
21.0119.18	3/8 Bsp MM	Adjust.	1,8	146	5,15	10		
21.0119.21	3/8 Bsp MM	Adjust.	2,1	146	5,15	10	✓	
21.0120.18	3/8 Npt MM	Adjust.	1,8	146	5,15	10		
21.0120.21	3/8 Npt MM	Adjust.	2,1	146	5,15	10	✓	
21.0120.23	3/8 Npt MM	Adjust.	2,3	146	5,15	10		

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Hose barb	7 mm	0,27 in
Material	Stainless steel	
Inlet		3/8 Bsp M
Outlet		3/8 Bsp M

Teflon O-rings



EXTENDED CHEMICAL INJECTOR+ARS220 A+B

P/N	Material	Nozzle	Col.	Hose length		Weight			
		mm		m	yd	gr	oz		
21.0622.14	Brass	1,4	Red	1,5	1,64	642	22,83	1	
21.0622.18	Brass	1,8	Blue	1,5	1,64	642	22,83	1	
21.0520.18	Stainless steel 303	1,8	Black	1,5	1,64	606	21,37	1	

Rated Pressure	220 bar - 22 MPa	3200 psi
Permissible Pressure	250 bar - 25 MPa	3650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	90 °C	195 °F
Inlet		ARS 220 "A"
Outlet		ARS 220 "B"
Type	Adjust.	

Injector with high suction power



LS3-2 - FOAMER WITH TANK **NEW**

P/N	Inlet	Nozzle		Weight			
		mm	Nozzle type	gr	oz		
25.1520.12	1/4 Bsp F	1,25	Horizontal	470	16,58	6	✓
25.1520.14	1/4 Bsp F	1,40	Horizontal	468	16,51	6	✓
25.1526.62	1/4 Bsp F	1,25	Vertical	470	16,6	6	✓
Rated Pressure		160 bar - 16 MPa		2300 psi			
Permissible Pressure		180 bar - 18 MPa		2600 psi			
Rated Flow		12 l/min		3,2 USGpm			
Rated Temperature		60 °C		140 °F			
Tank		1 L		0,264 USg			



LS 3 - FOAMER - SUCTION THROUGH EXTERNAL INJECTOR

P/N	Inlet	Nozzle		Weight			
		mm		gr	oz		
25.1530.18	1/4 F-3/8 MM Bsp	1,8		584	20,6	5	
Rated Pressure		160 bar - 16 MPa		2300 psi			
Permissible Pressure		180 bar - 18 MPa		2600 psi			
Rated Flow		20 l/min		5,3 USGpm			
Rated Temperature		60 °C		140 °F			



LS 12 - FOAMER

P/N	Mat.	Inlet	Nozzle		Weight			
			mm		gr	oz		
25.1800.65	Brass	1/4 Bsp F	1,5		390	13,76	5	✓
25.1815.65	St. steel	1/4 Bsp F	1,5		370	13	5	
Rated Pressure		200 bar - 20 MPa		2900 psi				
Permissible Pressure		220 bar - 22 MPa		3200 psi				
Rated Flow		25 l/min		6,5 USGpm				
Rated Temperature		60 °C		140 °F				



LS 12 - FOAMER WITH TANK **NEW**

P/N	Inlet	Nozzle		Tank	Mat.	Weight			
		mm	L USg			gr	oz		
25.1840.65	1/4 Bsp F	1,5	1 0,26	Brass	497	17,53	5	✓	
25.1840.68	1/4 Bsp F	1,8	1 0,26	Brass	497	17,53	5		
25.1840.71	1/4 Bsp F	2,1	1 0,26	Brass	494	17,42	5	✓	
25.1842.65	1/4 Bsp F	1,5	2 0,52	Brass	540	19,05	5	✓	
Rated Pressure		200 bar - 20 MPa		2900 psi					
Permissible Pressure		220 bar - 22 MPa		3200 psi					
Rated Flow		25 l/min		6,5 USGpm					
Rated Temperature		60 °C		140 °F					





LS12 ASP.E - FOAMER - SUCTION THROUGH EXTERNAL INJECTOR

P/N	Max. flow rate		Col.	Weight			
	l/min	USGpm		gr	oz		
25.1845.18	10	2,6	Black	618	21,8	5	✓
25.1845.21	15	4	Red	617	21,76	5	✓
25.1845.25	25	6,5	Blue	617	21,76	5	✓

Rated Pressure 200 bar - 20 MPa 2900 psi
 Permissible Pressure 220 bar - 22 MPa 3200 psi
 Rated Temperature 60 °C 140 °F
 Inlet 1/4 F-3/8 MM Bsp



LS 10 - FOAMER

P/N	Inlet	Nozzle		Weight			
		mm		gr	oz		
25.1860.50	1/4 Bsp F	1,5		367	12,94	5	✓
25.1860.65	3/8 Bsp M	1,5		366	12,91	5	✓

Rated Pressure 200 bar - 20 MPa 2900 psi
 Permissible Pressure 220 bar - 22 MPa 3200 psi
 Rated Flow 25 l/min 6,5 USGpm
 Rated Temperature 65 °C 150 °F



LS 10 - FOAMER WITH TANK

P/N	Inlet	Nozzle		Tank		Weight			
		mm		L	USg	gr	oz		
25.1865.65	3/8 Bsp M	1,5		1	0,26	468	16,5	5	✓
25.1868.65	3/8 Bsp M	1,5		2	0,52	508	17,9	5	✓

Rated Pressure 200 bar - 20 MPa 2900 psi
 Permissible Pressure 220 bar - 22 MPa 3200 psi
 Rated Flow 25 l/min 6,5 USGpm
 Rated Temperature 65 °C 150 °F



BTZ - SINGLE ROTATING CEILING BOOM

P/N	Type	Length		Inlet	Weight		
		mm	in.		gr	oz	
28.3500.00	Straight	1500	59	1/4 Bsp F	7400	261	2
28.3530.00	Straight	1650	65	1/4 Bsp F	7800	275,11	2



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	90 °C	195 °F
Angle of rotation		360°
Material	Zinc plated steel	



BTD /I -S - SINGLE ROTATING CEILING BOOM

P/N	Type	Length		Inlet	Weight		
		mm	in.		gr	oz	
28.3320.00	Inclined	1815	71,45	1/4 Bsp F	8000	282,17	2
28.3370.00	Straight	1815	71,45	1/4 Bsp F	8000	282,17	2



Entirely built in Stainless steel, with 2 maintenance-free, double-sealed ball bearings, which allow an easy, 360° rotation. EPDM seals ensure chemical compatibility of the boom with detergents which can damage the standard Viton seals.

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	90 °C	195 °F
Angle of rotation		360°
Outlet		3/8 Bsp M
Material	Stainless steel	
Seals material	Epdm	



Entirely built in Stainless steel, with 2 maintenance-free, double-sealed ball bearings, which allow an easy, 360° rotation. EPDM seals ensure chemical compatibility of the boom with detergents which can damage the standard Viton seals.

BTE - SINGLE ROTATING CEILING BOOM

P/N	Type	Length		Inlet	Weight		
		mm	in.		gr	oz	
28.3300.00	Inclined	1980	77,95	1/4 Bsp F	8980	317	2
28.3350.00	Straight	1980	77,95	1/4 Bsp F	9000	317,43	1



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	90 °C	195 °F
Angle of rotation		360°
Material	Stainless steel	



BTI - SINGLE ROTATING CEILING BOOM - INCLINED

P/N	Length		Inlet	Weight		
	mm	in.		gr	oz	
28.3150.00	1820	71,7	1/4 Bsp F	12200	430,3	2



Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	40 l/min	10,5 USGpm
Rated Temperature	90 °C	195 °F
Angle of rotation		360°
Material	Stainless steel	





BTC - BENT ROTATING CEILING BOOM

P/N	Length		Inlet	Weight		
	mm	in.		gr	oz	
28.3080.00	1550	61,1	1/4 Bsp F	11000	388	2
Rated Pressure		250 bar - 25 MPa		3650 psi		
Permissible Pressure		280 bar - 28 MPa		4050 psi		
Rated Flow		40 l/min		10,5 USGpm		
Rated Temperature		90 °C		195 °F		
Angle of rotation				360°		
Material				Stainless steel		



BTR - SINGLE ROTATING CEILING BOOM - 2 SPRINGS

P/N	Length		Inlet	Weight		
	mm	in.		gr	oz	
28.3000.00	1750	68,9	1/4 Bsp F	11400	402,09	1
28.3020.00	2000	78,75	1/4 Bsp F	11800	416,2	1
28.3025.00	2500	98,42	1/4 Bsp F	13000	458,52	1
Rated Pressure		250 bar - 25 MPa		3650 psi		
Permissible Pressure		280 bar - 28 MPa		4050 psi		
Rated Flow		40 l/min		10,5 USGpm		
Rated Temperature		90 °C		195 °F		
Angle of rotation				360°		
Material				Stainless steel		



BTD - DOUBLE CEILING ROTATING BOOM

P/N	Length			Weight		
	mm	in.		gr	oz	
28.3100.00	1750 - 1600	68,9 - 63		20600	726,58	1
28.3100.20	2000 - 1750	78,7 - 68,9		21600	761,85	1
28.3100.25	2500 - 2000	100 - 78,7		23200	818,28	1
Rated Pressure		250 bar - 25 MPa		3650 psi		
Permissible Pressure		280 bar - 28 MPa		4050 psi		
Rated Flow		40 l/min		10,5 USGpm		
Rated Temperature		90 °C		195 °F		
Inlet				1/4 Bsp F		
Angle of rotation				360°		
Material				Stainless steel		



WALL MOUNT FRAME

P/N	Height		Width		Weight		
	mm	in.	mm	in.	gr	oz	
28.3045.21	190	7,48	217	8,54	5000	176,4	1
Angle of rotation						180°	
Material						Zinc plated steel	



BGMS STANDING BOOM + SST. HOLDER

P/N	Height		Width		Weight		
	mm	in	mm	in	gr	oz	
28.3400.00	3082	121,33	2603	102,5	18300	645,5	1
Rated Pressure	250 bar - 25 MPa				3650 psi		
Permissible Pressure	280 bar - 28 MPa				4050 psi		
Rated Flow	40 l/min				10,5 USGpm		
Rated Temperature	90 °C				195 °F		
Angle of rotation					180°		
Material					Stainless steel		
Inlet					3/8 Bsp F		
Outlet					3/8 Bsp M		



SLP- PLAS.LANCE HOLDER

P/N	Material	Col.	Weight			
			gr	oz		
28.3230.00	PE	Blue	1276	45	2	✓
28.3230.30	PE	Gray	1276	45	2	✓



SLI - STAINLESS STEEL LANCE HOLDER

P/N	Hose Ø		Weight			
	mm	in	gr	oz		
28.3200.00	73	2,87	2424	85,5	1	✓
Material	Stainless steel					



VP - PE BRUSH TANK

P/N	Material	Col.	Weight			
			gr	oz		
28.3270.00	PE	Blue	3400	120	1	✓
28.3270.30	PE	Gray	3361	118,55	1	✓
Length			424 mm		16,7 in.	
Width			197 mm		7,76 in	
Height			585 mm		23,03 in	





URF 180 - ROTATING HEAD

P/N	Inlet	Outlet	Weight			
			gr	oz		
25.1130.00	1/4 Npt M	2 × 1/8 Bsp F	170	6	5	✓
Rated Pressure			250 bar - 25 MPa		3650 psi	
Permissible Pressure			280 bar - 28 MPa		4050 psi	
Rated Flow			30 l/min		8 USGpm	
Rated Temperature			0-80 °C		32-175 °F	



URF 400 - ROTATING HEAD

P/N	Inlet	Outlet	Weight			
			gr	oz		
25.1170.00	1/2 Bsp F	2 × 1/4 Bsp F	440	15,52	1	✓
Rated Pressure			350 bar - 35 MPa		5100 psi	
Permissible Pressure			390 bar - 39 MPa		5650 psi	
Rated Flow			80 l/min		21 USGpm	
Rated Temperature			0-80 °C		32-175 °F	



GR 38 - ROTATING TANK CLEANER

P/N	Inlet	Outlet	Weight			
			gr	oz		
26.1400.00	3/8 Bsp M	2 x M12 F	637	22,47	1	✓
Rated Pressure			350 bar - 35 MPa		5100 psi	
Permissible Pressure			390 bar - 39 MPa		5650 psi	
Rated Flow			40 l/min		10,5 USGpm	
Rated Temperature			120 °C		250 °F	
Max. working temperature			0-90 °C		32-195 °F	



GR38/200-400 - ROTATING HEAD

P/N	Width		Inlet	Outlet	Weight			
	mm	in			gr	oz		
26.1420.00	210	8,26	3/8 Bsp M	2 × 1/8 Npt F	759	26,77	1	✓
26.1440.00	400	15,75	3/8 Bsp M	2 × 1/8 Npt F	852	30,05	1	✓
Rated Pressure			350 bar - 35 MPa		5100 psi			
Permissible Pressure			390 bar - 39 MPa		5650 psi			
Rated Flow			40 l/min		10,5 USGpm			
Rated Temperature			120 °C		250 °F			
Max. working temperature			0-90 °C		32-195 °F			



GR58/400 - ROTATING HEAD **NEW**

P/N	Width		Inlet	Outlet	Weight			
	mm	in			gr	oz		
26.1460.00	400	15,75	1/2 Bsp F	2 × 1/8 Npt F	900	31,75	1	
Rated Pressure			500 bar - 50 MPa		7250 psi			
Permissible Pressure			560 bar - 56 MPa		8100 psi			
Rated Flow			40 l/min		10,5 USGpm			
Rated Temperature			120 °C		250 °F			
Max. working temperature			0-90 °C		32-195 °F			



M21E - ELECTRIC-DRIVEN BARREL CLEANER

P/N	Length		Power supply	Weight			
	mm	in.		gr	oz		
25.4300.00	550	21,7	230V 50Hz AC	3378	119,15	1	✓
25.4300.62	550	21,7	110V 60Hz AC Jap.	3200	111	1	
12.5073.00	0	0	115V Usa+230V Aust.	30	1	1	



Inlet			AR1 A M22
Rated Pressure	220 bar - 22 MPa		3200 psi
Permissible Pressure	250 bar - 25 MPa		3650 psi
Rated Flow	21 l/min		5,5 USGpm
Rated Temperature	0-90 °C		32-195 °F
Electric motor			12 V DC - 8 W
Cable length	10.000 mm		394 in
Min.overall Ø	40 mm		1,57 in
Nozzle type			2 × M4

Standard M4 nozzles supplied: 02-025-03-035-04



M25E - ELECTRIC-DRIVEN BARREL CLEANER + FLUID SUCTION

P/N	Barrel Ø		Power supply	Weight			
	mm	in		gr	oz		
25.4350.00	730	28,7	230V 50Hz AC	5570	196,46	1	
25.4350.25	730	28,7	24V AC	5100	180	1	
25.4363.00	680	26,7	220V AC	5405	190,64	1	
Shortened flexible version for reduced space							
25.4363.25	680	26,7	24V AC	5730	202,1	1	
Shortened flexible version for reduced space							
12.5073.00	0	0	115V Usa+230V Aust.	30	1	1	



Inlet			AR1 A M22
Rated Pressure	140 bar - 14 MPa		2000 psi
Permissible Pressure	160 bar - 16 MPa		2300 psi
Rated Flow	10-25 l/min		2,6-6,5 USGpm
Rated Temperature	0-90 °C		32-195 °F
Electric motor			12 V DC - 8 W
Cable length	10.000 mm		394 in
Min.overall Ø	40 mm		1,57 in
Nozzle type			2 × M4

Standard M4 nozzles supplied: 02-025-03-035-04



M28E - ELECTRIC-DRIVEN BARREL CLEANER + FLUID SUCTION

P/N	Barrel Ø		Power supply	Weight			
	mm	in		gr	oz		
25.4380.00	640	25,2	220V AC	5955	210,04	1	
Shortened flexible version for reduced space							
12.5073.00	0	0	115V Usa+230V Aust.	30	1	1	
Shortened flexible version for reduced space							



Inlet			AR1 A M22
Rated Pressure	140 bar - 14 MPa		2000 psi
Permissible Pressure	160 bar - 16 MPa		2300 psi
Rated Flow	10-25 l/min		2,6-6,5 USGpm
Rated Temperature	0-90 °C		32-195 °F
Electric motor			12 V DC - 8 W
Cable length	10.000 mm		394 in
Min.overall Ø	40 mm		1,57 in
Nozzle type			2 × M4

Standard M4 nozzles supplied: 02-025-03-035-04





HOLDER FOR M28E L-SHAPED BARREL CLEANER

P/N	Hole size		Length		Weight		
	mm	in	mm	in.	gr	oz	
25.4385.00	62,8	2,47	150	5,9	282	10	1



CABLE EXTENSION - 20 M - 12 V DC - MF

P/N	Couplings	Weight		
		gr	oz	
25.4353.20	M - F	1147	40,5	1



Cable length 20.000 mm 786 in

Suitable for M21 and M25



M63E - M63PA ATEX - SELF-PROPELLED TANK CLEANER HEAD- Ø45 MM -ATEX

P/N	Type	Certification	Length		Weight		
			mm	in.	gr	oz	
25.4500.04	Electr.- CE	CE	915	36	5075	179	1
25.4520.04	Air-driven	ATEX	915	36	4698	165,7	1
25.4526.04	Air-driven	ATEX	650	25,6	4248	149,83	1



Inlet 3/8 Bsp F
 Rated Pressure 140 bar - 14 MPa 2000 psi
 Min. operating pressure 40 bar - 4 MPa 580 psi
 Permissible Pressure 160 bar - 16 MPa 2300 psi
 Rated Flow 15-50 l/min 4-13,2 USGpm
 Rated Temperature 0-90 °C 32-195 °F
 Max. Voltage 24V AC
 Min. overall Ø 45 mm 1,8 in
 Nozzle type 4 x M4



M63E - M63PA ATEX - SELF-PROPELLED TANK CLEANER - Ø50 MM -ATEX

P/N	Type	Certification	Length		Weight		
			mm	in.	gr	oz	
25.4500.00	Electr.- CE	CE	915	36	5086	179,39	1
25.4506.00	Electr.- CE	CE	650	25,6	4626	164,5	1
25.4520.00	Air-driven	ATEX	915	36	4766	168,1	1
25.4526.00	Air-driven	ATEX	650	25,6	3940	138,9	1



Inlet 3/8 Bsp F
 Rated Pressure 140 bar - 14 MPa 2000 psi
 Permissible Pressure 160 bar - 16 MPa 2300 psi
 Rated Flow 15 - 50 l/min 4 - 13,2 USGpm
 Rated Temperature 0-90 °C 32-195 °F
 Max. Voltage 24V AC
 Min. overall Ø 65 mm 2,5 in
 Nozzle type 4 x 1/8 Npt



MI63 - HYDRAULIC-DRIVEN TANK CLEANER - Ø45 MM

P/N	Length		Max. flow rate		Weight		
	mm	in.	l/min	USGpm	gr	oz	
25.4600.24	915	36	15-21	4-5,5	7176	253,1	1



Inlet						3/4 Bsp F
Rated Pressure			140 bar - 14 MPa			2000 psi
Min. operating pressure			30 bar - 3 MPa			435 psi
Permissible Pressure			160 bar - 16 MPa			2300 psi
Rated Flow			15-50 l/min		4-13,2 USGpm	
Rated Temperature			0-90 °C			32-195 °F
Min. overall Ø			45 mm			1,8 in
Nozzle type						4 × M4
Rotational Speed						10-16 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.



MI63 - HYDRAULIC-DRIVEN TANK CLEANER - Ø50 MM

P/N	Length		Max. flow rate		Weight		
	mm	in.	l/min	USGpm	gr	oz	
25.4600.20	915	36	15-21	4-5,5	7049	248,62	1
25.4603.20	363	14,3	15-21	4-5,5	6153	217,02	1
25.4600.30	915	36	25-30	6,6-8	7219	254,62	1
25.4600.40	915	36	30-40	8-10	7219	254,62	1
25.4600.50	915	36	40-50	10,6-13,2	7235	255,18	1



Inlet						3/4 Bsp F
Rated Pressure			140 bar - 14 MPa			2000 psi
Min. operating pressure			30 bar - 3 MPa			435 psi
Permissible Pressure			160 bar - 16 MPa			2300 psi
Rated Flow			15-50 l/min		4-13,2 USGpm	
Rated Temperature			0-90 °C			32-195 °F
Min. overall Ø			65 mm			2,5 in
Nozzle type						4 × 1/8 Npt
Rotational Speed						10-16 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.



MI63A - HYDRAULIC-DRIVEN TANK CLEANER - ATEX 0575



P/N	Min. overall Ø		Length		Nozzle type	Max. flow rate		Weight		
	mm	in.	mm	in.		l/min	USGpm	gr	oz	
25.4902.25	65	2,5	915	36	4 × 1/8 Npt	20-25	5,3-6,6	7268	256,35	1
25.4902.29	45	1,8	915	36	4 × M4	20-25	5,3-6,6	7268	256,35	1



Rated Pressure			140 bar - 14 MPa					2000 psi
Min. operating pressure			30 bar - 3 MPa					435 psi
Permissible Pressure			160 bar - 16 MPa					2300 psi
Rated Flow			15-50 l/min			4-13,2 USGpm		
Rated Temperature			0-90 °C					32-195 °F
Rotational Speed								10-16 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.





MI85 - M85E - M85PA - SELF-PROPELLED TANK CLEANER - ATEX



P/N	Type	Certification	Inlet	Length		Weight		
				mm	in.	gr	oz	
25.4750.20	Hydr.-driven		3/4 Bsp F	915	36	7200	254	1
25.4770.00	Electr.- CE	CE	3/8 Bsp F	915	36	5452	192,3	1
25.4720.00	Air-driven	ATEX	3/8 Bsp F	915	36	5062	178,54	1



Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	30 bar - 3 MPa	435 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20-80 l/min	5,3-21 USGpm
Rated Temperature	0-90 °C	32-195 °F
Nozzle type		4 × 1/4 Npt
Max. Voltage		24V AC
Min. overall Ø	86 mm	3,4 in
Rotational Speed		10-16 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

A80R - SELF-PROPELLED TANK CLEANER

P/N	Max. flow rate		Min. overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.4820.00	-	-	165	6,4	5892	207,81	1
25.4820.20	15-21	4-5,5	165	6,4	6034	212,82	1
25.4820.25	20-25	5,3-6,6	165	6,4	6048	213,32	1
25.4820.30	25-30	6,6-8	165	6,4	6074	214,24	1
25.4820.40	30-40	8-10,6	165	6,4	6136	216,42	1
25.4820.50	40-50	10,6-13,2	165	6,4	6120	215,86	1
25.4820.60	50-60	13,2-16	165	6,4	6096	215,01	1
25.4820.70	60-70	16-18,5	165	6,4	6100	215,15	1
25.4820.80	70-85	18,5-22,5	165	6,4	5900	208,1	1
25.4820.90	85-120	22,5-31,7	165	6,4	6825	240,72	1



Inlet		3/4 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	30 bar - 3 MPa	435 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20-120 l/min	5,3-32 USGpm
Rated Temperature	0-90 °C	32-195 °F
Material		Stainless steel 303
Nozzle type		4 × 1/4 Npt
Rotational Speed		10-16 giri/min
Max. RPM		20 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

A80RA - SELF-PROPELLED TANK CLEANER - ATEX 0575



P/N	Max. flow rate		Min. overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.4872.50	40-50	10,6-13,2	165	6,4	5992	211,34	1
25.4872.60	50-60	13,2-16	165	6,4	5976	210,78	1
25.4872.80	70-85	18,5-22,5	165	6,4	5975	210,74	1



Inlet		3/4 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	30 bar - 3 MPa	435 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20-120 l/min	5,3-32 USGpm
Rated Temperature	0-90 °C	32-195 °F
Material		Stainless steel 303
Nozzle type		4 × 1/4 Npt
Rotational Speed		10-16 giri/min
Max. RPM		20 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

A80LU - SELF-PROPELLED TANK CLEANER - HF HNO3

P/N	Max. flow rate		Min. overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.4860.00	-	-	165	6,4	5300	184	1
25.4860.50	60-70	16-18,5	165	6,4	6000	211,6	1
25.4860.80	100-120	26,4-31,7	165	6,4	6000	211,6	1



Inlet		3/4 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	30 bar - 3 MPa	435 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	30-100 l/min	8-26,5 USGpm
Rated Temperature	0-90 °C	32-195 °F
Material		Stainless steel 303
Nozzle type		4 × 1/4 Npt
Rotational Speed		10-20 giri/min

Suitable for use with chemicals containing nitric acid (HNO₃) and hydrofluoric acid (HF)

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

A80R2 - SELF-PROPELLED TANK CLEANER

P/N	Rated Flow		Min. overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.4850.00	-	-	165	6,4	5300	184	1
25.4850.50	40-50	10,6-13,2	165	6,4	5900	208,1	1
25.4850.70	60-70	16-18,5	165	6,4	6674	235,4	1



Inlet		3/4 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	30 bar - 3 MPa	435 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20-80 l/min	5,3-21 USGpm
Rated Temperature	0-90 °C	32-195 °F
Material		Stainless steel 303
Nozzle type		4 × 1/4 Npt
Max. RPM		150 giri/min
Rotational Speed		60-120 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

A80FR2 - SELF-PROPELLED TANK CLEANER - FRONT AND SIDE CLEANING

P/N	Max. flow rate		Min. overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.4840.00	-	-	800	32	5004	176,5	1
25.4840.25	20-25	5,3-6,6	800	32	5053	178,22	1
25.4840.40	30-40	8-10,6	800	32	4500	158,7	1
25.4840.50	40-50	10,6-13,2	800	32	5096	179,74	1



Inlet		3/4 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	30 bar - 3 MPa	435 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20-80 l/min	5,3-21 USGpm
Rated Temperature	0-90 °C	32-195 °F
Material		Stainless steel 303
Nozzle type		2 × 1/4 Npt
Max. RPM		150 giri/min


Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.



A80RF- SELF-PROPELLED TANK CLEANER -

P/N	Max. flow rate		Min. overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.4890.00	-	-	150,7	5,94	7600	268	1
25.4890.90	85-120	22,5-31,7	150,7	5,94	7600	268	1



Inlet		3/4 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	30 bar - 3 MPa	435 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20-120 l/min	5,3-32 USGpm
Rated Temperature	0-90 °C	32-195 °F
Material		Stainless steel 303
Nozzle type		4 × 1/4 Npt
Rotational Speed		10-16 giri/min
Max. RPM		20 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

A300R - SELF-PROPELLED TANK CLEANER

P/N	Rated Flow		Nozzle type	Min. overall Ø		Weight		
	l/min	USGpm		mm	in	gr	oz	
25.6000.10	100	26,45	4 × 1/4 Npt	183	7,19	10200	360	1
25.6000.15	130	34,36	4 × 1/4 Npt	183	7,19	10200	360	1
25.6000.17	150	38,86	4 × 1/4 Npt	183	7,19	10200	360	1
25.6000.20	180	46,63	4 × 1/4 Npt	183	7,19	10200	360	1
25.6000.24	220	57	4 × 1/4 Npt	183	7,19	10200	360	1
25.6000.30	300	79,3	4 × 1/4 Npt	183	7,19	10200	360	1



Inlet		1" 1/4 Bsp F
Rated Pressure	70 bar - 7 MPa	1015 psi
Min. operating pressure	30 bar - 3 MPa	435 psi
Rated Flow	100-300 l/min	26,4-79,3 USGpm
Rated Temperature	0-90 °C	32-195 °F
Material		Stainless steel 303
Rotational Speed		4-5 giri/min
Max. RPM		6 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

PROTECTION FOR A80 R WITH EXTENDED NOZZLES

P/N	Mat.	Weight		
		gr	oz	
25.4822.00	St. steel	642	22,6	1



Fixing screws and nuts included



MI42-316- HYDRAULIC-DRIVEN TANK CLEANER - Ø62,5 MM - - ATEX (0575) CE Ex
APPROVED- NSF-FDA CONFORM

P/N	Rated Flow Rate		Length		Weight		
	l/min	USGpm	mm	in.	gr	oz	
25.3650.40	35-45	9,2-12	650	25,6	5950	210	1
25.3650.50	45-55	12-14,5	650	25,6	5950	210	1

Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	40 bar - 4 MPa	580 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20 - 65 l/min	5,3 - 17,2 USGpm
Rated Temperature	0-90 °C	32-195 °F
Rotational Speed		18-24 giri/min
Inlet		1/2 Bsp F
Nozzle type		4 × 1/8 Npt
Min. overall Ø	62,5 mm	2,46 in
Material		Stainless steel Ai316



Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

Made completely of Stainless steel Aisi316 L. Suitable for utilization in the food Industry since materials used for manufacturing have NSF approval.

SST 316 TC3 FLANGE- TRI-CLAMP 3"+SCREWS+O-RING

P/N	Hole size		Fitting	Type	Weight		
	mm	in			gr	oz	
25.3601.24	37	1,45	M 63 - M 85	A	239	8,43	1
25.3602.42	37	1,45	MI 42	B	239	8,43	1

Material

Stainless steel Ai316


KIT TLR M4 AI316 -TANK CLEANER M 4 HEAD - Ø40,5MM - X MI42-316-MI63

P/N	Inlet	Nozzle type	Weight		
			gr	oz	
25.3610.24	M25x1 M	2 × M4	3752	132,34	1

Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	40 bar - 4 MPa	580 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	15 - 35 l/min	4 - 9,2 USGpm
Rated Temperature	0-90 °C	32-195 °F
Rotational Speed		18-24 giri/min
Min. overall Ø	40,5 mm	1,6 in
Material		Stainless steel Ai316



Nozzles not included. Cod. nozzles 80.0882.60>80.0889.60

To choose the right part no., please fill in the selection questionnaire.

Made completely of Stainless steel Aisi316 L. Suitable for utilization in the food Industry since materials used for manufacturing have NSF approval.



A42R-316 - SELF-PROPELLED TANK CLEANER - ATEX (0575)) APPROVED -NSF



FDA CONFORM

P/N	Rated Flow		Min.overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.5600.20	15-25	4-6,5	86	3,39	3590	126,6	1
25.5600.30	25-35	6,5-9,2	86	3,39	3590	126,6	1
25.5600.40	35-45	9,2-12	86	3,39	3590	126,6	1
25.5600.50	45-55	12-14,5	86	3,39	3590	126,6	1



Inlet		1/2 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	40 bar - 4 MPa	580 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20 - 55 l/min	5,3 - 14,5 USGpm
Rated Temperature	0-90 °C	32-195 °F
Nozzle type		3 × 1/8 Npt
Rotational Speed		18 - 24 giri/min
Material		Stainless steel Aisi316

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

Made completely of Stainless steel Aisi316 L. Suitable for utilization in the food Industry since materials used for manufacturing have NSF approval.

A42R-316 -360° SELF-PROPELLED TANK CLEANER - ATEX (0575) APPROVED



-NSF FDA CONFORM

P/N	Rated Flow		Min.overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.5700.40	35-45	9,2-12	108	4,25	5600	197,5	1
25.5700.50	45-55	12-14,5	108	4,25	5600	197,5	1



Inlet		1/2 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	40 bar - 4 MPa	580 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20 - 55 l/min	5,3 - 14,5 USGpm
Rated Temperature	0-90 °C	32-195 °F
Nozzle type		4 × 1/8 Npt
Rotational Speed		18 - 24 giri/min
Material		Stainless steel Aisi316

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

Made completely of Stainless steel Aisi316 L. Suitable for utilization in the food Industry since materials used for manufacturing have NSF approval.

A30 R - SELF-PROPELLED TANK CLEANER **NEW**

P/N	Max. flow rate		Min.overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.3300.12	9 - 12	2,3 - 3,1	60	2,36	2030	71,61	1
25.3300.15	11 - 15	2,85 - 3,9	60	2,36	2030	71,61	1
25.3300.18	14 - 18	3,6 - 4,6	60	2,36	2030	71,61	1
25.3300.25	18 - 25	4,6 - 6,5	60	2,36	2030	71,61	1
25.3300.33	25 - 33	6,5 - 8,6	60	2,36	2030	71,61	1



Inlet		1/2 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	30 bar - 3 MPa	435 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	9-33 l/min	2,4-8,7 USGpm
Rated Temperature	0-90 °C	32-195 °F
Material		Stainless steel 303
Nozzle type		4 × M4
Rotational Speed		20-30 giri/min
Max. RPM		30 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

A42 R - SELF-PROPELLED TANK CLEANER


P/N	Rated Flow		Min. overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.5180.20	20	5,3	86	3,39	3752	132,34	1
25.5180.30	20-30	5,3-8	86	3,39	3648	128,66	1
25.5180.40	30-40	8-10,5	86	3,39	3648	128,67	1



Inlet		1/2 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	40 bar - 4 MPa	580 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20 - 50 l/min	5-13,2 USGpm
Rated Temperature	0-90 °C	32-195 °F
Nozzle type		3 × 1/8 Npt
Rotational Speed		29 - 36 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.



A42 R-360° - SELF-PROPELLED TANK CLEANER

P/N	Rated Flow		Min. overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.5360.15	13-17	3,4-4,5	108	4,25	3752	132,34	1
25.5360.20	20	5,2	108	4,25	3752	132,34	1
25.5360.25	25	6,6	108	4,25	3752	132,34	1
25.5360.30	30	8	108	4,25	3752	132,34	1
25.5360.35	35	9,2	108	4,25	3752	132,34	1
25.5360.40	40	10,6	108	4,25	3752	132,34	1
25.5360.50	50	13	108	4,25	3752	132,34	1



Inlet		1/2 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	40 bar - 4 MPa	580 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	13 - 50 l/min	3,4-13,2 USGpm
Rated Temperature	0-90 °C	32-195 °F
Nozzle type		4 × 1/8 Npt
Rotational Speed		18 - 24 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.



A42 R2 - SELF-PROPELLED TANK CLEANER


P/N	Rated Flow		Min. overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.5200.20	20	5,2	86	3,39	3436	121,19	1
25.5200.24	20-25	5,3-6,5	86	3,39	3337	117,7	1
25.5200.28	25-30	6,5-8	86	3,39	3434	121,12	1
25.5200.34	30-40	8-10,5	86	3,39	3405	120,1	1
25.5200.33	40-50	10,5-13,2	86	3,39	3434	121,12	1



Inlet		1/2 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	40 bar - 4 MPa	580 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20 - 50 l/min	5 - 13,2 USGpm
Rated Temperature	0-90 °C	32-195 °F
Nozzle type		3 × 1/8 Npt
Rotational Speed		110-180 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.






A42 FR 2- SELF-PROP. FRONT CLEANER - 3 NOZZLES - SAME ANGLE

P/N	Rated Flow		Min.overall Ø		Weight			
	l/min	USGpm	mm	in	gr	oz		
25.5150.20	20	5,3	72	2,8	3246	114,49	1	
25.5150.26	20-30	5,3-8	72	2,8	3151	111,14	1	
25.5150.40	30-40	8-10,5	72	2,8	3148	111,03	1	
25.5150.33	50-60	13,2-16	72	2,8	3218	113,5	1	

Inlet		1/2 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	40 bar - 4 MPa	580 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20 - 60 l/min	5 - 16 USGpm
Rated Temperature	0-90 °C	32-195 °F
Nozzle type		3 × 1/4 Npt
Rotational Speed		180 - 260 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

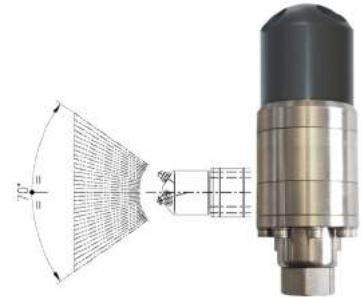


A42 FR 2-45°- SELF-PROP. FRONT CLEANER - 3 NOZZLES 45°

P/N	Rated Flow		Min.overall Ø		Weight			
	l/min	USGpm	mm	in	gr	oz		
25.5194.26	20-30	5,3-8	72	2,8	3162	111,53	1	
25.5194.35	30-35	8-9,2	72	2,8	3165	111,63	1	

Inlet		1/2 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	40 bar - 4 MPa	580 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20 - 60 l/min	5 - 16 USGpm
Rated Temperature	0-90 °C	32-195 °F
Nozzle type		3 × 1/4 Npt
Rotational Speed		180 - 260 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

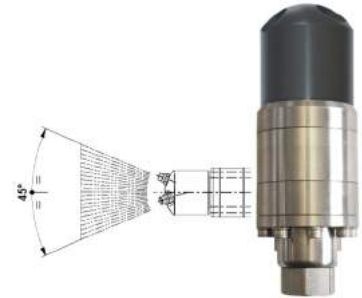


A43 FR 2- SELF-PROP.FRONT CLEANER - 3 NOZZLES - DIFFERENT SPRAY ANGLES

P/N	Rated Flow		Min.overall Ø		Weight			
	l/min	USGpm	mm	in	gr	oz		
25.5190.25	20-25	5-6,5	72	2,8	3244	114,42	1	
25.5190.26	25-30	6,5-8	72	2,8	3155	111,28	1	
25.5190.30	35-40	9-10,5	72	2,8	3152	111,17	1	
25.5190.34	45-50	12-13,2	72	2,8	3150	111,1	1	
25.5190.33	50-60	13,2-16	72	2,8	3144	110,89	1	

Inlet		1/2 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	40 bar - 4 MPa	580 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	20 - 60 l/min	5 - 16 USGpm
Rated Temperature	0-90 °C	32-195 °F
Nozzle type		3 × 1/4 Npt
Rotational Speed		180 - 260 giri/min

Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.

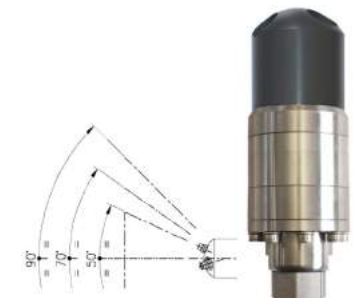

A44 FR 2- SELF-PROP.FRONT CLEANER - 4 NOZZLES - DIFFERENT SPRAY ANGLES

P/N	Rated Flow		Min.overall Ø		Weight		
	l/min	USGpm	mm	in	gr	oz	
25.5400.30	35	9	72	2,8	3070	108,3	1
25.5400.40	40	10,5	72	2,8	3070	108,3	1
25.5400.60	50-60	13,2-16	72	2,8	3157	111,35	1



Inlet		1/2 Bsp F
Rated Pressure	140 bar - 14 MPa	2000 psi
Min. operating pressure	40 bar - 4 MPa	580 psi
Permissible Pressure	160 bar - 16 MPa	2300 psi
Rated Flow	15 - 60 l/min	4 - 16 USGpm
Rated Temperature	0-90 °C	32-195 °F
Nozzle type		4 × 1/4 Npt
Rotational Speed		180 - 260 giri/min



Nozzles not included.

To choose the right part no., please fill in the selection questionnaire.


HOOK ATTACHMENT FOR TANK CLEANERS **NEW**

P/N	Hole size		Type	Version	Weight		
	mm	in			gr	oz	
25.3301.53	11	0,433	A 30	C	15	0,53	2
25.4821.53	11	0,433	A 80	B	15	0,53	2
25.5562.53	11	0,433	A300 - A 42	A	15	0,53	2



Material

Stainless steel Ai 304


TEFLON GREASE FOR TANK CLEANERS

P/N	Type	Weight		
		gr	oz	
14.6550.00	Teflon grease	0	0	2
14.6552.00	Teflon silicon grease	0	0	2





LP1 - STAINLESS STEEL FLOOR CLEANER

P/N	Width		Inlet	Gun type	Weight			
	mm	in			gr	oz		
29.0600.00	410	16	A M22	-	4321	152,41	1	✓
Spray gun not included								
30.1558.00	+ sw.8 3/8 Bsp F		RL 36		728	25,68	1	

Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	20 l/min	5,3 USGpm
Rated Temperature	160 °C	320 °F
Nozzle Size		06
Material		Stainless steel

Nozzles included



LPR8/2 - STAINLESS STEEL FLOOR CLEANER-ROTATING NOZZLES

NEW

P/N	Width		Inlet	Gun type	Weight			
	mm	in			gr	oz		
29.0700.10	450	17,72	3/8 Bsp F	RL 56	12200	430,3	1	✓

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Rated Flow	30 l/min	8 USGpm
Rated Temperature	80 °C	175 °F
Material		Stainless steel
Nozzle type		1/8 Npt M

Nozzles not included



FL7 - FLOW SWITCH WITH PROBE

P/N	Standing posit.*		Level posit.*		Weight			
	l/min	USGpm	l/min	USGpm	gr	oz		
28.0400.10	9	2,4	6	1,6	436	15,38	20	
28.0400.38	4	1,06	3	0,79	441	15,55	20	

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Max. flow rate on delivery	60 l/min	15.9 USGpm
Max flow rate on feed side	30 l/min	7.9 USGpm
Max. working temperature	75 °C	165 °F
Max. Voltage		230 V
Max.switch capacity		60 VA
Max. Curr. Strength		3 A
Electric cable		2x0,5 mmq.
Cable length	1250 mm	49,2 in
Electrical insulation		55 IP
Inlet		3/8 Bsp F
Outlet		3/8 Bsp F

* Minimum operating flow rate



FL7 MS- FLOW SWITCH WITH PROBE

P/N	Standing posit.*		Weight			
	l/min	USGpm	gr	oz		
28.0430.00	0,3	0,1	455	16,05	5	

Rated Pressure	350 bar - 35 MPa	5100 psi
Permissible Pressure	390 bar - 39 MPa	5650 psi
Max. flow rate on delivery	60 l/min	15.9 USGpm
Max flow rate on feed side	30 l/min	7.9 USGpm
Max. working temperature	75 °C	165 °F
Max. Voltage		230 V
Max.switch capacity		60 VA
Max. Curr. Strength		3 A
Electric cable		2x0,5 mmq.
Cable length	1250 mm	49,2 in
Electrical insulation		55 IP
Inlet		3/8 Bsp F
Outlet		3/8 Bsp F

* Minimum operating flow rate



FL7 INOX - FLOW SWITCH WITH PROBE-50 MPA

P/N	Standing posit.*		Level posit.*		Weight			
	l/min	USGpm	l/min	USGpm	gr	oz		
28.0450.00	9	2,4	6	1,6	430	15,17	5	

Rated Pressure	500 bar - 50 MPa	7300 psi
Permissible Pressure	560 bar - 56 MPa	8120 psi
Max flow rate on feed side	30 l/min	8 USGpm
Max. flow rate on delivery	60 l/min	16 USGpm
Max. working temperature	75 °C	165 °F
Max. Voltage		230 V
Max.switch capacity		60 VA
Max. Curr. Strength		3 A
Electric cable		2x0,5 mmq.
Cable length	1250 mm	49,2 in
Electrical insulation		55 IP
Inlet		3/8 Bsp F
Outlet		3/8 Bsp F
Material		Stainless steel 303

* Minimum operating flow rate



FL3 - FLOW SWITCH WITH PROBE

P/N	Shutter	Gauge bolt	Weight			
			gr	oz		
28.0500.10	Delrin	-	288	10,16	25	✓
28.0540.10	Brass	-	300	10,58	25	✓
Brass piston covering						
28.0530.10	Delrin	1x 1/4 Bsp F	308	10,86	25	✓
With 1/4 Bsp F gauge port						
28.0535.00	Brass	1x 1/4 Bsp F	318	11,22	25	✓
With 1/4 Bsp F gauge port						



Inlet		3/8 Bsp M
Outlet		3/8 Bsp M
Rated Pressure	250 bar - 25 MPa	3650 psi
Permissible Pressure	280 bar - 28 MPa	4050 psi
Rated Flow	30 l/min	8 USGpm
Level posit.*	3 l/min	0,8 USGpm
Standing posit.*	3 l/min	0,8 USGpm
Max. working temperature	75 °C	165 °F
Max. Voltage		230 V
Max. Curr. Strength		3 A
Max.switch capacity		60 VA
Electric cable		2x0,5 mmq.
Cable length	1250 mm	49,2 in
Electrical insulation		55 IP

*Minimum operating flow rate

FL 12 - FLOW SWITCH WITH PROBE

P/N	Standing posit.*		Level posit.*		Couplings	Weight			
	l/min	USGpm	l/min	USGpm		gr	oz		
28.0460.15	12,5	3,3	7,5	2	3/4 Bsp FF	975	34,4	4	
28.0460.00	12,5	3,3	7,5	2	3/4 F Npt	975	34,4	4	

Rated Pressure	280 bar - 28 MPa	4000 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Max. flow rate on delivery	100 l/min	26,4 USGpm
Max flow rate on feed side	50 l/min	13,2 USGpm
Max. working temperature	75 °C	165 °F
Max. Voltage		230 V
Max.switch capacity		60 VA
Max. Curr. Strength		3 A
Electric cable		2x0,5 mmq.
Cable length	1250 mm	49,2 in
Electrical insulation		55 IP

* Minimum operating flow rate



PR5 - PRESSURE SWITCH

P/N	Inlet	Operat. press.		Col.	Weight			
		bar - MPa	psi		gr	oz		
29.0080.55	1/8 Bsp M	40 - 4	580	Black	136	4,8	50	✓
29.0080.18	1/8 Bsp M	25 - 2,5	360	Red	134	4,73	50	✓
29.0080.05	1/8 Bsp M	15 - 1,5	220	Blue	130	4,6	50	✓
29.0080.75	1/8 Bsp M	10 - 1	140	Yellow	138	4,87	50	
29.0080.50	1/4 Bsp M	40 - 4	580	Black	139	4,9	50	✓
29.0080.00	1/4 Bsp M	25 - 2,5	360	Red	137	4,83	50	✓
29.0080.10	1/4 Bsp M	15 - 1,5	220	Blue	137	4,83	50	✓
29.0080.80	3/8 Bsp M	40 - 4	580	Black	148	5,22	50	✓
29.0080.85	3/8 Bsp M	25 - 2,5	360	Red	145	5,11	50	✓
29.0080.88	3/8 Bsp M	15 - 1,5	220	Blue	146	5,15	50	

Rated Pressure 250 bar - 25 MPa 3650 psi
 Permissible Pressure 280 bar - 28 MPa 4050 psi
 Rated Temperature 75 °C 165 °F
 Max. Voltage 250 V
 Max. Curr. Strength 6 (2) A
 Electrical insulation 55 IP
 Material Brass



PR16 - PRESSURE SWITCH WITH BRASS NIPPLE

P/N	Inlet	Operat. press.		Col.	Weight			
		bar - MPa	psi		gr	oz		
29.0040.20	1/4 Bsp M	40 - 4	580	Black	186	6,56	20	✓
29.0040.30	1/4 Bsp M	25 - 2,5	360	Red	186	6,56	20	✓
29.0040.40	1/4 Bsp M	15 - 1,5	220	Blue	189	6,67	20	✓
29.0040.00	3/8 Bsp M	40 - 4	580	Black	197	6,95	20	✓
29.0040.15	3/8 Bsp M	25 - 2,5	360	Red	195	6,88	20	✓
29.0040.11	3/8 Bsp M	15 - 1,5	220	Blue	196	6,91	20	

Rated Pressure 250 bar - 25 MPa 3650 psi
 Permissible Pressure 280 bar - 28 MPa 4050 psi
 Rated Temperature 75 °C 165 °F
 Max. Voltage 250 V
 Max. Curr. Strength 16 (6) A
 Electrical insulation 55 IP
 Material Brass



PR16 - PRESSURE SWITCH WITH SST NIPPLE

P/N	Inlet	Operat. press.		Col.	Weight			
		bar - MPa	psi		gr	oz		
29.0035.30	1/4 Bsp M	40 - 4	580	Black	186	6,56	20	✓
29.0035.25	1/4 Bsp M	25 - 2,5	360	Red	184	6,49	20	✓
29.0035.10	3/8 Bsp M	40 - 4	580	Black	192	6,77	20	✓
29.0035.15	3/8 Bsp M	25 - 2,5	360	Red	194	6,84	20	✓
29.0035.50	1/4 Npt M	40 - 4	580	Black	186	6,56	20	✓
29.0035.52	1/4 Npt M	25 - 2,5	360	Red	189	6,67	20	✓
29.0035.51	1/4 Npt M	15 - 1,5	220	Blue	188	6,63	20	✓
29.0035.62	3/8 Npt M	25 - 2,5	360	Red	195	6,88	20	✓

Rated Pressure 250 bar - 25 MPa 3650 psi
 Permissible Pressure 280 bar - 28 MPa 4050 psi
 Rated Temperature 75 °C 165 °F
 Max. Voltage 250 V
 Max. Curr. Strength 16 (6) A
 Electrical insulation 55 IP
 Material Stainless steel



PR1 - 600 BAR STAINLESS STEEL PRESSURE SWITCH

P/N	Mat.	Operat. press.		Col.	Weight				
		bar - MPa	psi		gr	oz			
29.0000.00	St. steel	45 - 4,5	650	Black	294	10,37	20		✓
29.0000.25	St. steel	25 - 2,5	360	Red	292	10,3	20		✓

Inlet		3/8 Bsp M
Rated Pressure	600 bar - 60 MPa	8700 psi
Permissible Pressure	660 bar - 66 MPa	9570 psi
Rated Temperature	90 °C	195 °F
Max. Voltage		250 V
Max. Curr. Strength		16 (6) A
Electrical insulation		55 IP



THERMOSTAT WITH EXTERNAL PROBE

P/N	Length of coil		Probe		Weight				
	mm	in	mm	in	gr	oz			
12.5050.00	900	35,4	7 x 95	0,28 x 3,74	116	4,09	10		✓

Rated Temperature	120 °C	250 °F
Max. Voltage		240 V
Max. Curr. Strength		16 (6) A



THERMOSTAT WITH INTERNAL PROBE

P/N	Length of coil		Probe		Weight				
	mm	in	mm	in	gr	oz			
12.5060.00	1500	59	7x95	0,28 x 3,74	146	5,15	10		✓

Couplings		M 14 x 1 M
Rated Pressure	200 bar - 20 MPa	2880 psi
Rated Temperature	120 °C	250 °F
Max. Voltage		250 V
Max. Curr. Strength		16(4) A



PROBE CASE

P/N	Couplings	Hole size		Type	Weight				
		mm	in		gr	oz			
29.0250.00	1/2 Bspt M	7 x 90	0,27x 3,5	A	78	2,75	10		✓
Suitable for 12.5050.00									
29.0254.31	1/2 Bspt M	M 14 x 1		B	47	1,66	10		✓
Suitable for 12.5060.00									

Material	Brass
----------	-------



PS1 PROBE POCKET

P/N	Couplings	Weight				
		gr	oz			
29.0260.35	3x3/8 Bsp F+1/2Bsp F	284	10,02	10		✓

Rated Pressure	280 bar - 28 MPa	4050 psi
Permissible Pressure	310 bar - 31 MPa	4500 psi
Rated Temperature	160 °C	320 °F
Material		Brass




STAINLESS STEEL LANCE HOLDER

P/N	No. of Ports	Hole size		Weight		
		mm	in	gr	oz	
28.0790.53	5	16	0,63	378	13,33	5
28.0794.53	4	16	0,63	102	3,6	5

Material

Stainless steel Ai 304



PLASTIC HIGH PRESSURE HOSE REEL -SST/BRASS

P/N	Type	Hose length		Mat.	Weight		
		m	yd		gr	oz	
29.0710.00	T 16	10	11	Brass	2800	98,8	1 ✓
29.0720.00	T 26	20	22	Brass	3418	120,56	1 ✓
29.0727.00	T 27	20	22	St. steel	3480	122,74	1 ✓
29.0740.00	T 46	40	43,6	Brass	3826	134,95	1 ✓
29.0747.00	T 47	40	43,6	St. steel	3866	136,36	1 ✓

Inlet 3/8 Bsp M
Hose Ø 20 mm 3/8 in
Rated Pressure 250 bar - 25 MPa 3650 psi
Permissible Pressure 280 bar - 28 MPa 4050 psi
Rated Temperature 90 °C 195 °F

Hose not supplied

Mat. Brass : Brass swivels and painted steel rest

Mat. Sst : Sst swivel and rest



HIGH PRESSURE ALUMINIUM HOSE REEL

P/N	Type	Rated pr.		Inlet	Hose length		Hose Ø		Weight		
		bar - MPa	psi		m	yd	mm	in	gr	oz	
29.0360.00	T 52	300 - 30	4350	3/8 Bsp M	80	87,5	16,8	0,66	13000	458,52	1 ✓
29.0375.00	T 53	200 - 20	2900	1/2 Bsp M	58	63,4	19,5	0,77	13000	458,52	1 ✓
29.0390.00	T 100	200 - 20	2900	1/2 Bsp M	100	109	19,5	0,77	16400	578,44	1

Rated Temperature 90 °C 195 °F

Hose not supplied



BRASS ELBOW FITTINGS

P/N	Inlet	Outlet	Weight		
			gr	oz	
12.2000.00	1/4 Bsp M	1/4 Bsp M	64	2,2	25 ✓
12.2004.00	1/4 Bsp M	1/4 Bsp F	76	2,68	25 ✓
12.2002.00	1/4 Bsp F	1/4 Bsp F	90	3,17	25 ✓
12.2006.00	3/8 Bsp M	3/8 Bsp M	70	2,47	25 ✓
12.2010.00	3/8 Bsp M	3/8 Bsp F	92	3,24	25 ✓
12.2012.00	3/8 Bsp M	1/4 Bsp M	64	2,26	25 ✓
12.2014.00	3/8 Bsp M	1/4 Bsp F	79	2,79	25 ✓
12.2008.00	3/8 Bsp F	3/8 Bsp F	112	3,95	25 ✓
12.2018.00	3/8 Bsp F	1/4 Bsp M	85	3	5
12.2020.00	1/2 Bsp M	1/2 Bsp M	94	3,32	25 ✓
12.2022.00	1/2 Bsp M	3/8 Bsp F	118	4,1	25 ✓
12.2024.00	1/2 Bsp M	3/8 Bsp M	82	2,89	25 ✓
12.2026.00	1/2 Bsp M	1/4 Bsp M	75	2,65	25 ✓

Rated Pressure 350 bar - 35 MPa

5100 psi

Material

Brass






BRASS TII-FITTINGS

P/N	Couplings	Weight				
		gr	oz			
12.2050.00	3/8 FF+F Bsp	161	5,68	25	✓	
12.2050.10	3/8 FF+F+1/8F Bsp	157	5,54	25	✓	
12.2053.00	3/8 MF+1/4 F Bsp	132	4,66	25	✓	
12.2054.00	3/8 MF+ F Bsp	138	4,87	25	✓	
12.2055.00	3/8 FF+M Bsp	139	4,9	25	✓	
12.2058.00	3/8 F-1/4 F+3/8 M Bsp	130	4,6	25	✓	
Rated Pressure		350 bar - 35 MPa		5100 psi		
Material				Brass		




SST ELBOW FITTINGS AI303 -60MPA

P/N	Inlet	Outlet	Type	Weight			
				gr	oz		
12.3000.55	3/8 Bsp F	3/8 Bsp F	A	144	5,08	5	✓
12.3001.55	1/2 Bsp F	1/2 Bsp F	B	237	8,36	5	✓
Rated Pressure		600 bar - 60 MPa		8760 psi			
Material				Stainless steel 303			



SST TII-FITTINGS TII -AI303 - 60MPA

P/N	Couplings	Type	Weight			
			gr	oz		
12.3050.55	3/8 FF+F Bsp	A	208	7,34	5	✓
12.3051.55	1/2 Bsp FF+F	B	334	11,78	5	✓
Rated Pressure		600 bar - 60 MPa		8760 psi		
Material				Stainless steel 303		



ZINC PLATED COUPLINGS AND HOSE BARB FITTINGS

P/N	Inlet	Outlet	Weight			
			gr	oz		
13.5006.00	1/4 Bsp M	1/4 Bsp M	26	0,92	25	✓
40.5002.61	1/4 Bsp M	1/4 Bsp F	41	1,4	10	
13.5011.00	1/4 Bsp M	3/8 Bsp M	42	1,4	25	✓
13.5007.00	1/4 Bsp F	1/4 Bsp F	24	0,8	25	✓
13.5025.00	3/8 Bsp M	3/8 Bsp M	42	1,48	25	✓
13.5030.00	3/8 Bsp M	1/2 Bsp M	72	2,54	25	✓
13.5031.00	1/2 Bsp M	1/2 Bsp M	72	2,5	25	✓
13.5008.08	3/8 Bsp M	8mm hose barb	42	1,48	25	
13.5032.08	1/2 Bsp M	8mm hose barb	49	1,7	10	
40.5005.61	1/4 Npt M	1/4 Npt F	41	1,4	10	
40.0006.61	1/4 Npt M	1/4 Bsp F	41	1,4	10	
Rated Pressure		250 bar - 25 MPa		3650 psi		
Material				Zinc plated steel		



BRASS COUPLINGS AND HOSE BARB FITTINGS **NEW**

P/N	Inlet	Outlet	Weight		
			gr	oz	
40.5008.31	1/4 Bspt M	1/4 Bsp F	44	1,5	10
26.0036.31	1/4 Bsp F	3/8 Bsp M	44	1,5	10
26.0037.31	1/4 Bsp F	3/8 Bsp F	44	1,5	25
13.5027.31	3/8 Bsp F	1/4 Bsp M	44	1,5	25 ✓
13.5024.31	3/8 Bsp M	3/8 Bsp M	40	1,41	25 ✓
29.0103.31	1/8 Bsp M	8mm hose barb	20	0,7	10

 Rated Pressure
Material

250 bar - 25 MPa

 3650 psi
Brass

STAINLESS STEEL COUPLINGS **NEW**

P/N	Inlet	Outlet	Weight		
			gr	oz	
40.5002.51	1/4 Bsp F	1/4 Bsp M	41	1,4	10
40.0007.51	1/4 Bsp F	1/4 Npt F	23	0,8	10
40.0251.51	1/4 Bsp F	1/4 Bspt M	41	1,4	5
40.0252.51	1/4 Bsp F	1/4 Npt M	41	1,4	5
13.5009.51	1/4 Bsp M	1/4 Npt M	44	1,5	5 ✓
26.0232.51	1/4 Bsp F	3/8 Bsp F	41	1,4	5
13.5025.51	3/8 Bsp M	3/8 Bsp M	44	1,5	5 ✓

 Rated Pressure
Material

250 bar - 25 MPa

 3650 psi
Stainless steel

STAINLESS STEEL COUPLINGS-60MPA

P/N	Inlet	Outlet	Type	Weight		
				gr	oz	
13.5050.51	1/4 Bsp M	1/4 Bsp M	A	34	1,2	5 ✓
13.5051.51	3/8 Bsp M	3/8 Bsp M	B	52	1,83	5 ✓
13.5052.51	1/2 Bsp M	1/2 Bsp M	C	88	3,1	5 ✓
13.5060.51	1/4 Bsp M	3/8 Bsp M	D	44	1,55	5 ✓
13.5061.51	3/8 Bsp M	1/2 Bsp M	E	78	2,75	5 ✓
13.5062.51	3/8 Bsp M	1/4 Npt M	F	46	1,62	5
13.5070.51	1/4 Bsp F	3/8 Bsp M	G	55	1,94	5 ✓
13.5071.51	1/4 Bsp F	1/2 Bsp M	H	96	3,39	5
13.5072.51	3/8 Bsp F	1/2 Bsp M	L	94	3,32	5

 Rated Pressure
Material

600 bar - 60 MPa

 8760 psi
Stainless steel 303

BRASS PLUGS AND GRUB SCREWS

P/N	Couplings	Type	Weight		
			gr	oz	
30.0008.31	1/8 Bspt	Hex.10	18	0,65	10
28.0013.31	1/4 Bsp	Hex.17	18	0,65	25 ✓
60.0022.31	1/4 Bsp	Grub screw	4	0,14	5
60.0028.31	3/8 Bsp	Hex.19	18	0,65	25
60.0413.31	1/2 Bsp	Hex.27	51	1,8	10 ✓
60.0026.31	1/4 Npt M	Grub screw	4	0,14	1
60.0025.31	3/8 Npt M	Grub screw	4	0,14	10
60.0444.31	1/2 Npt	Grub screw	24	0,9	10
21.0199.31	M 12 × 1 mm	Grub screw	4	0,14	5

 Rated Pressure
Material

250 bar - 25 MPa

 3650 psi
Brass


STAINLESS STEEL PLUGS AND GRUB SCREWS

P/N	Couplings	Type	Weight			
			gr	oz		
60.0413.51	1/2 Bsp	Hex.27	56	2	3	
15.3711.18	1/8 Npt M	Grub screw	9	0,3	4	
15.3721.14	1/4 Npt M	Grub screw	18	0,6	10	
60.0444.51	1/2 Npt	Grub screw	22	0,8	1	
60.0444.60	1/2 Npt	Grub screw	22	0,8	3	
Ai 316						
60.0552.51	M 24 × 1,5 M	Hex.27	88	3,1	5	
Rated Pressure		250 bar - 25 MPa		3650 psi		
Material		Stainless steel				



FILLER AND CAP FOR GAS OIL

P/N	Type	Hole size		Length		Material	Weight		
		mm	in	mm	in.		gr	oz	
29.0197.84	Fillercap	39	1,54	-	-	PE	22	0,78	25 ✓
29.0196.66	Filler	39	1,54	70	2,76	Steel	76	2,68	25 ✓
29.0198.66	Filler	39	1,54	105	4,13	Steel	120	4,2	25



PULSATION DAMPENER

P/N	Volume		Inlet	Type	Weight		
	L	USg			gr	oz	
29.0200.05	0,1	0,026	3/8 Npt F	A	874	30,83	1 ✓
29.0202.05	0,35	0,093	1/2 Npt F	B	1768	62,36	1 ✓
Rated Pressure			210 bar - 21 MPa		3050 psi		
Charge press.			40 bar - 4 MPa		580 psi		
Rated Temperature			80 °C		176 °F		



PRESSURE GAUGE - ND 63

P/N	Scale	Inlet	Type	Version	Weight		
					gr	oz	
13.0025.16	160 - 16	1/4 Bspt M	Radial	B	155	5,46	15 ✓
13.0025.25	250 - 25	1/4 Bspt M	Radial	B	148	5,22	15 ✓
13.0025.31	315 - 31,5	1/4 Bspt M	Radial	B	154	5,43	15 ✓
13.0025.40	400 - 40	1/4 Bspt M	Radial	B	148	5,22	15 ✓
13.0035.16	160 - 16	1/4 Bspt M	Back entry	A	168	5,93	15 ✓
13.0035.25	250 - 25	1/4 Bspt M	Back entry	A	170	6	15 ✓
13.0035.31	315 - 31,5	1/4 Bspt M	Back entry	A	168	5,93	15 ✓
13.0035.40	400 - 40	1/4 Bspt M	Back entry	A	168	5,93	15 ✓



Case ABS

B5 - PUMPS' GEARBOX

P/N	Drive shaft Ø		Pump shaft Ø		Weight			
	mm	in	mm	in	gr	oz		
50.0600.00	19,05	3/4"	24	0,9449	2048	72,23	5	✓

Gear ratio 2,3 : 1
 Engine power 4,8 kw 6,5 hp
 Oil capacity 0,15 l 4,5 oz

Lubricating oil : Sae 90
 Engine flange : Sae J609a
 Pumps : AR-Bertolini-Comet-Interpump-Leuco-Hawk-Udor



B10 - PUMPS' GEARBOX

P/N	Drive shaft Ø		Pump shaft Ø		Weight			
	mm	in	mm	in	gr	oz		
50.0100.00	25,4	1"	24	0,9449	3754	132,41	5	

Gear ratio 2,176 : 1
 Engine power 5 - 7 kw 7 - 10 hp
 Oil capacity 0,35 l 10 oz

Lubricating oil : Sae 90
 Engine flange : Sae J609b
 Pumps : AR-Bertolini-Comet-Interpump-Leuco-Hawk-Udor



B18 - PUMPS' GEARBOX

NEW

P/N	Drive shaft Ø		Pump shaft Ø		Weight			
	mm	in	mm	in	gr	oz		
50.0000.00	25,4	1"	24	0,9449	3841	135,47	5	✓
50.0090.00	25,4	1"	24	0,9449	3841	135,47	5	
Pumps: IP EVO 2- Speck NP10-15-16								
50.0040.00	28,6	1" 1/8	24	0,9449	3765	132,79	5	
50.0000.25	25,0	0,984	24	0,9449	3809	134,35	5	✓
50.0015.00	25,4	1"	25	0,984	3902	137,63	5	

Pumps : Leuco LT-XLT

Gear ratio 2,176 : 1
 Engine power 8 - 13 kw 11 - 18 hp
 Oil capacity 0,35 l 10 oz

Lubricating oil : Sae 90
 Engine flange : Sae J609b
 Pumps: AR-Bertolini-Comet-Interpump-Leuco-Hawk-Udor



B18H - PUMPS' GEARBOX

P/N	Drive shaft Ø		Pump shaft Ø		Weight			
	mm	in	mm	in	gr	oz		
50.0050.00	25,4	1"	24	0,9449	4304	151,81	5	✓

Gear ratio 2,176 : 1
 Engine power 8 - 13 kw 11 - 18 hp
 Oil capacity 0,35 l 10 oz

Lubricating oil : Sae 90
 Engine flange : Sae J609b
 Pumps: AR-Bertolini-Comet-Interpump-Leuco-Hawk-Udor



B24 - PUMPS' GEARBOX

P/N	Drive shaft Ø		Pump shaft Ø		Weight			
	mm	in	mm	in	gr	oz		
50.0060.00	28,6	1"1/8	24	0,9449	3768	132,9	5	✓
50.0062.00	25,4	1"	24	0,9449	3862	136,22	5	✓
50.0064.00	28,6	1"1/8	25	0,9842	3759	132,58	5	✓



Gear ratio
 Engine power
 Oil capacity

2,176 : 1
 13-17 kw
 0,35 l

18-24 hp
 10 oz

Lubricating oil : Sae 90
 Engine flange : Sae J609b
 Pumps: AR-Bertolini-Comet-Interpump-Leuco-Hawk-Udor

B31 - PUMPS' GEARBOX

P/N	Drive shaft Ø		Pump shaft Ø		Weight			
	mm	in	mm	in	gr	oz		
50.0071.00	28,6	1"1/8	24	0,9449	3804	134,17	5	✓
50.0071.30	28,6	1"1/8	30	1,181	3732	131,63	5	✓



Gear ratio
 Engine power
 Oil capacity

2,176 : 1
 17-23 kw
 0,35 l

24-31 hp
 10 oz

Lubricating oil : Sae 90
 Engine flange : Sae J609b
 Pumps: AR-Bertolini-Comet-Interpump-Leuco-Hawk-Udor

TABELLA RIEPILOGATIVA PORTAUGELLI SPECIALI
SPECIAL NOZZLES CHART

Tutti gli ugelli PA sono forniti con tolleranze di ±5% sui dati riportati nella tabella
All PA nozzles are supplied with a ±5% tolerance on data reported in this table

Fatt. Port. Capac. Size	Colore Color	Portata (l/min) a 100 bar - 10 MPa										Flow rate (GPM) at 1450 PSI										★ ➡	Fatt. Port. Capac. Size	Colore Color
		HL250	HL280	VAN	VAN250	UR1		UR3		UR16	UR25	UR32		UR20		UR35		UR50	TS2	TS3	TS8			
						Monot.	Biturbo	Monot.	Biturbo		GAS	GAS	GAS	NPT	GAS	NPT								
O2	Verde chiaro Light green	4,6 1,2	25.0700.10	25.0950.10									25.1720.20		25.1735.20					25.0000.10	O2	Verde chiaro Light green		
O23	Giallo chiaro Light yellow	5,0 1,3		25.0950.11																	O23	Giallo chiaro Light yellow		
O25	Rosa Pink	5,7 1,5	25.0700.11		25.0900.10	25.0850.11				25.1680.25									25.0080.11		O25	Rosa Pink		
O27	Nero Black	6,1 1,6																			O27	Nero Black		
O3	Bianco White	6,8 1,8	25.0700.12	25.0950.12	25.0900.11	25.0850.12	25.1100.11			25.1680.30	25.1620.30	25.1690.30	25.1720.30	25.1700.30	25.1735.30			25.0020.12	25.0080.12	25.0000.12	O3	Bianco White		
O32	Viola scuro Dark purple	7,1 1,9	25.0700.25																		O32	Viola scuro Dark purple		
O35	Marrone Brown	8,0 2,1	25.0700.13	25.0950.13	25.0900.12	25.0850.13	25.1100.12	25.1148.12		25.1680.35	25.1620.35	25.1690.35	25.1720.35	25.1700.35	25.1735.35	25.1935.35					O35	Marrone Brown		
O37	Rosso chiaro Light red	8,4 2,2	25.0700.35																		O37	Rosso chiaro Light red		
O4	Giallo scuro Dark yellow	9,1 2,4	25.0700.14	25.0950.14	25.0900.13	25.0850.14	25.1100.13			25.1680.40	25.1620.40	25.1690.40	25.1720.40	25.1700.40	25.1735.40		25.1750.40	25.0020.14 25.0020.54	25.0080.14	25.0000.14	O4	Giallo scuro Dark yellow		
O43	Grigio scuro Dark gray	9,7 2,6	25.0700.45																		O43	Grigio scuro Dark gray		
O45	Blu Blue	10,3 2,7	25.0700.15	25.0950.15	25.0900.14	25.0850.15	25.1100.14	25.1148.14		25.1680.45	25.1620.45	25.1690.45	25.1720.45	25.1700.45	25.1735.45	25.1935.45	25.1750.45	25.0020.15	25.0080.15	25.0000.15	O45	Blu Blue		
O5	Viola chiaro Light purple	11,4 3,0	25.0700.55				25.1100.15		25.1150.10	25.1680.50	25.1620.50	25.1690.50	25.1720.50		25.1735.50		25.1750.50	25.0020.16		25.0000.16	O5	Viola chiaro Light purple		
O53	Beige Beige	12,0 3,2	25.0700.16	25.0950.16		25.0850.16															O53	Beige Beige		
O55	Rosso scuro Dark red	12,5 3,3	25.0700.65	25.0950.55	25.0900.15			25.1148.16		25.1680.55	25.1620.55	25.1690.55	25.1720.55	25.1700.55	25.1735.55	25.1935.55	25.1750.55				O55	Rosso scuro Dark red		
O6	Verde scuro Dark green	13,7 3,6	25.0700.66	25.0950.60	25.0900.16		25.1100.16	25.1148.17	25.1150.11	25.1680.60	26.1620.60	25.1690.60	25.1720.60		25.1735.60		25.1750.60				O6	Verde scuro Dark green		
O65	Celeste Light blue	14,8 3,9	25.0700.72							25.1680.65	25.1620.65	25.1690.65	25.1720.65	25.1700.65	25.1735.65	25.1935.65	25.1750.65				O65	Celeste Light blue		
O7	Arancio Orange	16,0 4,2	25.0700.18	25.0950.18					25.1150.12	25.1680.70	25.1620.70	25.1690.70	25.1720.70	25.1700.70			25.1750.70				O7	Arancio Orange		
O75		17,1 4,5																		25.0000.18	O75			
O8	Argento Silver	18,2 4,8	25.0700.20		25.0900.18		25.1100.17		25.1150.13		25.1620.80	25.1690.80			25.1735.80						O8	Argento Silver		
O85	Bianco-Rosa White-Rose	19,4 5,1																		25.0000.20	O85	Bianco-Rosa White-Rose		
O9	Oro Gold	21,0 5,5		25.0950.22			25.1100.18		25.1150.14						25.1735.90	25.1935.90					O9	Oro Gold		
10	Bianco-Blu White-Blue	23,0 6,1							25.1150.15						25.1735.10						10	Bianco-Blu White-Blue		
12	Bianco-Giallo White-Yellow	27,0 7,1		25.0950.24					25.1150.17						25.1735.12						12	Bianco-Giallo White-Yellow		
13	Bianco-Verde White-Green	30,0 7,9			25.0900.23																13	Bianco-Verde White-Green		
20	Bianco-Rosso White-Red	46,0 12,2			25.0900.28																20	Bianco-Rosso White-Red		

Fattore di Portata		Portata (l/min) alla Pressione (bar)																		Fattore di Portata	
Capacity Size		Flow rate (GPM) at Pressure (PSI)																		Capacity Size	
	bar MPa PSI	1 0,1 15	2 0,2 29	3 0,3 44	4 0,4 58	5 0,5 73	6 0,6 87	7 0,7 102	8 0,8 116	9 0,9 131	10 1 145	15 1,5 218	20 2 290	25 2,5 363	30 3 435	40 4 580	50 5 725	60 6 870	bar MPa PSI		
* F.P. UGELLI SPECIALI	01		0,2 0,1	0,3 0,1	0,4 0,1	0,5 0,1	0,6 0,1	0,6 0,2	0,7 0,2	0,7 0,2	0,7 0,2	0,9 0,2	1,0 0,3	1,2 0,3	1,3 0,3	1,5 0,4	1,6 0,4	1,8 0,5	1,8 0,5	01	
	015		0,3 0,1	0,5 0,1	0,6 0,2	0,7 0,2	0,8 0,2	0,8 0,2	0,9 0,3	1,0 0,3	1,1 0,3	1,3 0,4	1,5 0,4	1,7 0,5	1,9 0,5	2,2 0,6	2,4 0,6	2,6 0,7	2,6 0,7	015	
	02		0,5 0,1	0,7 0,2	0,8 0,2	0,9 0,2	1,0 0,3	1,1 0,3	1,2 0,3	1,3 0,3	1,4 0,4	1,5 0,4	1,8 0,5	2,1 0,6	2,3 0,6	2,5 0,7	2,9 0,8	3,3 0,9	3,6 0,9	02	
	023*		0,5 0,1	0,7 0,2	0,9 0,2	1,0 0,3	1,1 0,3	1,2 0,3	1,3 0,3	1,4 0,4	1,5 0,4	1,6 0,4	1,9 0,5	2,2 0,6	2,5 0,7	2,7 0,7	3,2 0,8	3,5 0,9	3,9 1,0	023*	
	025*		0,6 0,1	0,8 0,2	1,0 0,3	1,1 0,3	1,3 0,4	1,4 0,4	1,5 0,4	1,6 0,4	1,7 0,4	1,8 0,5	2,2 0,6	2,5 0,7	2,8 0,7	3,1 0,8	3,5 0,9	4,0 1,0	4,3 1,1	025*	
	027*		0,6 0,2	0,9 0,2	1,1 0,3	1,2 0,3	1,4 0,4	1,5 0,4	1,6 0,4	1,7 0,5	1,8 0,5	1,9 0,5	2,4 0,6	2,7 0,6	3,1 0,8	3,3 0,9	3,9 1,0	4,3 1,1	4,7 1,2	027*	
	03		0,7 0,2	1,0 0,3	1,2 0,3	1,4 0,4	1,5 0,4	1,7 0,4	1,8 0,5	1,9 0,5	2,0 0,6	2,2 0,6	2,6 0,7	3,0 0,8	3,4 0,9	3,7 1,0	4,3 1,1	4,8 1,3	5,3 1,4	03	
	032*		0,7 0,2	1,0 0,3	1,2 0,4	1,4 0,4	1,6 0,4	1,7 0,5	1,9 0,5	2,0 0,6	2,1 0,6	2,2 0,6	2,7 0,7	3,2 0,8	3,6 0,9	3,9 1,0	4,5 1,2	5,0 1,3	5,5 1,5	032*	
	035*		0,8 0,2	1,1 0,3	1,4 0,4	1,6 0,4	1,8 0,5	2,0 0,5	2,1 0,6	2,3 0,6	2,4 0,6	2,5 0,7	3,1 0,8	3,6 0,9	4,0 1,1	4,4 1,2	5,1 1,3	5,7 1,5	6,2 1,6	035*	
	037*		0,8 0,2	1,2 0,3	1,5 0,4	1,7 0,4	1,9 0,5	2,1 0,5	2,2 0,6	2,4 0,6	2,5 0,7	2,7 0,7	3,3 0,9	3,8 1,0	4,2 1,1	4,6 1,2	5,3 1,4	5,9 1,6	6,5 1,7	037*	
04		0,9 0,2	1,3 0,3	1,6 0,4	1,8 0,5	2,0 0,5	2,2 0,6	2,4 0,6	2,6 0,7	2,7 0,7	2,9 0,8	3,5 1,1	4,1 1,2	4,6 1,3	5,0 1,5	5,8 1,7	6,4 1,9	7,0 1,9	04		
043*		1,0 0,3	1,4 0,4	1,7 0,5	1,9 0,6	2,2 0,6	2,4 0,7	2,6 0,7	2,7 0,7	2,9 0,8	3,1 0,9	3,8 1,1	4,3 1,3	4,9 1,4	5,3 1,6	6,1 1,8	6,9 2,0	7,5 2,0	043*		
045		1,0 0,3	1,5 0,4	1,8 0,5	2,1 0,6	2,3 0,6	2,5 0,7	2,7 0,7	2,9 0,8	3,1 0,9	3,3 1,0	4,0 1,1	4,6 1,2	5,2 1,4	5,6 1,5	6,5 1,7	7,3 1,9	8,0 2,1	045		
05		1,1 0,3	1,6 0,4	2,0 0,5	2,3 0,6	2,5 0,7	2,8 0,7	3,0 0,8	3,2 0,9	3,4 0,9	3,6 1,0	4,4 1,2	5,1 1,3	5,7 1,5	6,2 1,6	7,2 1,9	8,1 2,1	8,8 2,3	05		
Tutti gli ugelli PA sono forniti con tolleranze di ±5% sui dati riportati nella tabella All PA nozzles are supplied with a ±5% tolerance on data reported in this table	053*		1,2 0,3	1,7 0,4	2,1 0,5	2,4 0,6	2,7 0,7	2,9 0,8	3,2 0,8	3,4 0,9	3,6 1,0	4,6 1,2	5,4 1,4	6,0 1,6	6,6 1,7	7,6 2,0	8,5 2,2	9,3	9,3	053*	
	055		1,3 0,3	1,8 0,5	2,2 0,6	2,5 0,7	2,8 0,7	3,1 0,8	3,3 0,9	3,5 0,9	3,8 1,0	4,8 1,3	5,6 1,5	6,3 1,7	6,8 1,8	7,9 2,1	8,8 2,3	9,7	9,7	055	
	06		1,4 0,4	1,9 0,5	2,4 0,6	2,7 0,7	3,1 0,8	3,4 0,9	3,6 1,0	3,9 1,1	4,1 1,1	4,3 1,2	5,3 1,5	6,1 1,6	6,9 2,0	7,5 2,1	8,7 2,3	9,7 2,6	10,6	06	
	065		1,5 0,4	2,1 0,6	2,6 0,7	3,0 0,8	3,3 0,9	3,6 0,9	3,9 1,0	4,2 1,1	4,4 1,2	5,4 1,5	6,6 1,7	7,4 2,0	8,1 2,1	9,4 2,5	10,5 2,8	11,5	11,5	065	
	07		1,6 0,4	2,3 0,6	2,8 0,7	3,2 0,8	3,6 0,9	3,9 1,0	4,2 1,1	4,5 1,2	4,8 1,3	5,1 1,3	6,2 1,6	7,2 1,9	8,0 2,1	8,8 2,3	10,1 2,7	11,3 3,0	12,4	07	
	075		1,7 0,5	2,4 0,6	3,0 0,8	3,4 0,9	3,8 1,0	4,2 1,1	4,5 1,2	4,8 1,3	5,1 1,4	5,4 1,4	6,6 1,7	7,6 2,0	8,6 2,3	9,4 2,5	10,8 2,9	12,1 3,2	13,2	075	
	08		1,8 0,5	2,6 0,7	3,2 0,8	3,6 1,0	4,1 1,1	4,5 1,2	4,8 1,3	5,1 1,4	5,5 1,4	5,8 1,5	7,0 1,9	8,1 2,2	9,1 2,4	10,0 2,6	11,5 3,0	12,9 3,4	14,1	08	
	085		1,9 0,5	2,7 0,7	3,4 0,9	3,9 1,1	4,3 1,3	4,8 1,4	5,1 1,4	5,5 1,5	5,8 1,6	6,1 1,6	7,5 2,0	8,7 2,3	9,7 2,6	10,6 2,8	12,3 3,2	13,7 3,6	15,0	085	
	09		2,1 0,6	3,0 0,8	3,6 1,0	4,2 1,1	4,7 1,2	5,1 1,4	5,6 1,5	5,9 1,6	6,3 1,7	6,6 1,8	8,1 2,1	9,4 2,5	10,5 2,8	11,5 3,0	13,3 3,5	14,8 3,9	16,3	09	
	095		2,2 0,6	3,1 0,8	3,8 1,0	4,4 1,2	4,9 1,3	5,4 1,4	5,8 1,5	6,2 1,6	6,6 1,7	7,0 1,8	8,5 2,3	9,8 2,6	11,0 2,9	12,0 3,2	13,9 3,7	15,6 4,1	17,0	095	
10		2,3 0,6	3,3 0,9	4,0 1,1	4,6 1,2	5,1 1,4	5,6 1,5	6,1 1,6	6,5 1,7	6,9 1,8	7,3 1,9	8,9 2,4	10,3 2,7	11,5 3,0	12,6 3,3	14,5 3,8	16,3 4,3	17,8	10		
11		2,5 0,7	3,5 0,9	4,3 1,1	5,0 1,3	5,6 1,5	6,1 1,6	6,6 1,7	7,1 1,9	7,5 2,0	7,9 2,1	9,7 2,6	11,2 3,0	12,5 3,3	13,7 3,6	15,8 4,2	17,7 4,7	19,4	11		
115		2,6 0,7	3,7 1,0	4,5 1,2	5,2 1,4	5,8 1,5	6,4 1,7	6,9 1,8	7,4 1,9	7,8 2,1	8,2 2,2	10,1 2,7	11,6 3,1	13,0 3,4	14,2 3,8	16,4 4,3	18,4 4,9	20,1	115		
12		2,7 0,7	3,8 1,0	4,7 1,2	5,4 1,4	6,0 1,6	6,6 1,7	7,1 1,9	7,6 2,0	8,1 2,1	8,5 2,2	10,5 2,8	12,1 3,2	13,5 3,5	14,8 4,0	17,1 4,5	19,1 5,0	20,9	12		
125		2,8 0,7	4,0 1,0	4,8 1,3	5,6 1,5	6,3 1,7	6,9 1,8	7,4 2,0	7,9 2,1	8,4 2,2	8,9 2,3	10,8 2,9	12,5 3,3	14,0 3,7	15,3 4,1	17,7 4,7	19,8 5,2	21,7	125		
13		3,0 0,8	4,2 1,1	5,2 1,4	6,0 1,6	6,7 1,8	7,3 1,9	7,9 2,1	8,5 2,2	9,0 2,4	9,5 2,5	11,6 3,1	13,4 3,5	15,0 4,0	16,4 4,3	19,0 5,0	21,2 5,6	23,2	13		
14		3,2 0,8	4,5 1,2	5,5 1,5	6,4 1,7	7,2 1,9	7,8 2,1	8,5 2,2	9,1 2,4	9,6 2,5	10,1 2,7	12,4 3,3	14,3 3,8	16,0 4,2	17,5 4,6	20,2 5,3	22,6 6,0	24,8	14		
15		3,4 0,9	4,8 1,3	5,9 1,6	6,8 1,8	7,6 2,0	8,3 2,2	9,0 2,5	9,6 2,7	10,2 2,8	10,8 3,0	13,2 3,5	15,2 4,0	17,0 4,5	18,6 4,9	21,5 5,7	24,0 6,4	26,3	15		
16		3,6 1,0	5,1 1,3	6,2 1,6	7,2 1,9	8,0 2,1	8,8 2,3	9,5 2,5	10,2 2,7	10,8 2,9	11,4 3,0	13,9 3,7	16,1 4,3	18,0 4,8	19,7 5,2	22,8 6,0	25,5 6,7	27,9	16		
18		4,1 1,1	5,8 1,5	7,1 1,9	8,2 2,2	9,2 2,4	10,0 2,7	10,8 2,9	11,6 3,1	12,3 3,2	13,0 3,4	15,9 4,2	18,3 4,8	20,5 5,4	22,5 5,9	25,9 6,9	29,0 7,7	31,8	18		
19		4,3 1,1	6,1 1,6	7,4 2,0	8,6 2,3	9,6 2,5	10,5 2,8	11,4 3,0	12,2 3,2	12,9 3,4	13,6 3,6	16,7 4,4	19,2 5,1	21,5 5,7	23,6 6,2	27,2 7,2	30,4 8,0	33,3	19		
20		4,6 1,2	6,5 1,7	8,0 2,1	9,2 2,4	10,3 2,7	11,3 3,0	12,2 3,2	13,0 3,4	13,8 3,6	14,5 3,8	17,8 4,7	20,6 5,4	23,0 6,1	25,2 6,7	29,1 7,7	32,5 8,6	35,6	20		
25		5,7 1,5	8,1 2,1	9,9 2,6	11,4 3,0	12,7 3,4	14,0 3,7	15,1 4,0	16,1 4,3	17,1 4,5	18,0 4,8	22,1 5,8	25,5 6,7	28,5 7,5	31,2 8,2	36,0 9,5	40,3 10,6	44,2	25		
30		6,8 1,8	9,6 2,5	11,8 3,1	13,6 3,6	15,2 4,0	16,7 4,4	18,0 4,8	19,2 5,1	20,4 5,4	21,5 5,7	26,3 7,0	30,4 8,0	34,0 9,0	37,2 9,8	43,0 11,4	48,1 12,7	52,7	30		
35		8,0 2,1	11,3 3,0	13,9 3,7	16,0 4,2	17,9 4,7	19,6 5,2	21,2 5,6	22,6 6,0	24,0 6,3	25,3 6,7	31,0 8,2	35,8 9,5	40,0 10,6	43,8 11,6	50,6 13,4	56,6 14,9	62,0	35		
40		9,1 2,4	12,9 3,4	15,8 4,2	18,2 4,8	20,3 5,4	22,2														

Fattore di Portata		Portata (l/min) alla Pressione (bar)																				Fattore di Portata	
Capacity Size		Flow rate (GPM) at Pressure (PSI)																				Capacity Size	
	bar MPa PSI	70 1015	80 1160	90 1305	100 1450	110 1595	120 1740	130 1885	140 2030	150 2175	160 2320	170 2465	180 2610	190 2755	200 2900	210 3045	220 3190	230 3335	bar MPa PSI				
* F.P. UGELLI SPECIALI	01	1,9 0,5	2,1 0,5	2,2 0,6	2,3 0,6	2,4 0,6	2,5 0,7	2,6 0,7	2,7 0,7	2,8 0,7	2,9 0,8	3,0 0,8	3,1 0,8	3,2 0,8	3,3 0,9	3,3 0,9	3,4 0,9	3,5 0,9		01			
	015	2,8 0,8	3,0 0,8	3,2 0,9	3,4 0,9	3,6 0,9	3,7 1,0	3,9 1,0	4,0 1,1	4,2 1,1	4,3 1,1	4,4 1,2	4,6 1,2	4,7 1,2	4,8 1,3	4,9 1,3	5,0 1,3	5,2 1,4		015			
	02	3,8 1,0	4,1 1,1	4,4 1,2	4,6 1,3	4,8 1,4	5,0 1,3	5,2 1,4	5,4 1,4	5,6 1,5	5,8 1,5	6,0 1,6	6,2 1,6	6,3 1,7	6,5 1,7	6,7 1,8	6,8 1,8	7,0 1,8		02			
	023*	4,2 1,1	4,5 1,2	4,7 1,3	5,0 1,3	5,2 1,4	5,5 1,4	5,7 1,5	5,9 1,6	6,1 1,6	6,3 1,7	6,5 1,7	6,7 1,8	6,9 1,8	7,1 1,9	7,2 1,9	7,4 2,0	7,6 2,0		023*			
	025*	4,7 1,2	5,0 1,3	5,3 1,4	5,6 1,5	5,9 1,6	6,1 1,6	6,4 1,7	6,6 1,8	6,9 1,8	7,1 1,9	7,3 1,9	7,5 2,0	7,7 2,0	7,9 2,1	8,1 2,1	8,3 2,2	8,5 2,2		025*			
	027*	5,1 1,3	5,5 1,4	5,8 1,5	6,1 1,6	6,4 1,7	6,7 1,8	7,0 1,8	7,2 1,9	7,5 1,9	7,7 2,0	8,0 2,1	8,2 2,1	8,4 2,2	8,6 2,3	8,8 2,3	9,0 2,4	9,3 2,4		027*			
	03	5,7 1,5	6,1 1,6	6,5 1,7	6,8 1,8	7,1 1,9	7,4 2,0	7,8 2,1	8,0 2,1	8,3 2,2	8,6 2,3	8,9 2,3	9,1 2,4	9,4 2,5	9,6 2,5	9,9 2,6	10,1 2,7	10,3 2,7		03			
	032*	5,9 1,6	6,4 1,7	6,7 1,8	7,1 1,9	7,4 2,0	7,8 2,1	8,1 2,1	8,4 2,2	8,7 2,3	9,0 2,4	9,3 2,4	9,5 2,5	9,8 2,6	10,0 2,7	10,3 2,7	10,5 2,8	10,8 2,8		032*			
	035*	6,7 1,8	7,2 1,9	7,6 2,0	8,0 2,1	8,4 2,2	8,8 2,3	9,1 2,3	9,5 2,4	9,8 2,5	10,1 2,6	10,4 2,7	10,7 2,8	11,0 2,9	11,3 3,0	11,6 3,1	11,9 3,1	12,1 3,2		035*			
	037*	7,0 1,9	7,5 2,0	8,0 2,1	8,4 2,2	8,8 2,3	9,2 2,4	9,6 2,5	9,9 2,6	10,3 2,7	10,6 2,8	11,0 2,9	11,3 3,0	11,6 3,1	11,9 3,1	12,2 3,2	12,5 3,3	12,7 3,4		037*			
* F.P. UGELLI SPECIALI	04	7,6 2,0	8,1 2,2	8,6 2,3	9,1 2,4	9,5 2,5	10,0 2,6	10,4 2,7	10,8 2,8	11,1 2,9	11,5 3,0	11,9 3,1	12,2 3,2	12,5 3,3	12,9 3,4	13,2 3,5	13,5 3,6	13,8 3,6		04			
	043*	8,1 2,1	8,7 2,3	9,2 2,4	9,7 2,6	10,2 2,7	10,6 2,8	11,1 2,9	11,5 3,0	11,9 3,1	12,3 3,2	12,6 3,3	13,0 3,4	13,4 3,5	13,7 3,6	14,1 3,7	14,4 3,8	14,7 3,9		043*			
	045	8,6 2,3	9,2 2,4	9,8 2,6	10,3 2,7	10,8 2,9	11,3 3,0	11,7 3,1	12,2 3,2	12,6 3,3	13,0 3,4	13,4 3,5	13,8 3,7	14,2 3,8	14,6 3,9	14,9 4,0	15,3 4,0	15,6 4,1		045			
	05	9,5 2,5	10,2 2,7	10,8 2,9	11,4 3,0	12,0 3,2	12,5 3,3	13,0 3,4	13,5 3,6	14,0 3,7	14,4 3,8	14,9 3,9	15,3 4,0	15,7 4,2	16,1 4,3	16,5 4,4	16,9 4,5	17,3 4,6		05			
	053*	10,0 2,7	10,7 2,8	11,4 3,0	12,0 3,2	12,6 3,3	13,1 3,5	13,7 3,6	14,2 3,8	14,7 3,9	15,2 4,0	15,6 4,1	16,1 4,3	16,5 4,4	17,0 4,5	17,4 4,6	17,8 4,7	18,2 4,8		053*			
	055	10,5 2,8	11,2 3,0	11,9 3,1	12,5 3,3	13,1 3,5	13,7 3,6	14,3 3,8	14,8 3,9	15,3 4,0	15,8 4,2	16,3 4,3	16,8 4,4	17,2 4,6	17,7 4,7	18,1 4,8	18,5 4,9	19,0 5,0		055			
	06	11,5 3,0	12,3 3,2	13,0 3,4	13,7 3,6	14,4 3,8	15,0 4,0	15,6 4,1	16,2 4,3	16,8 4,4	17,3 4,6	17,9 4,7	18,4 4,9	18,9 5,0	19,4 5,1	19,9 5,2	20,3 5,4	20,8 5,5		06			
	065	12,4 3,3	13,2 3,5	14,0 3,7	14,8 3,9	15,5 4,1	16,2 4,3	16,9 4,5	17,5 4,6	18,1 4,8	18,7 4,9	19,3 5,1	19,9 5,2	20,4 5,4	20,9 5,5	21,4 5,7	22,0 5,8	22,4 5,9		065			
	07	13,4 3,5	14,3 3,8	15,2 4,0	16,0 4,2	16,8 4,4	17,5 4,6	18,2 4,8	18,9 5,0	19,6 5,2	20,2 5,3	20,9 5,5	21,5 5,7	22,1 5,8	22,6 6,0	23,2 6,1	23,7 6,3	24,3 6,4		07			
	075	14,3 3,8	15,3 4,0	16,2 4,3	17,1 4,5	17,9 4,7	18,7 4,9	19,5 5,2	20,2 5,3	20,9 5,5	21,6 5,7	22,3 5,9	22,9 6,1	23,6 6,2	24,2 6,4	24,8 6,5	25,4 6,7	25,9 6,9		075			
Tutti gli ugelli PA sono forniti con tolleranze di ±5% sui dati riportati nella tabella All PA nozzles are supplied with a ±5% tolerance on data reported in this table	08	15,2 4,0	16,3 4,3	17,3 4,6	18,2 4,8	19,1 5,0	19,9 5,3	20,8 5,5	21,5 5,7	22,3 5,9	23,0 6,1	23,7 6,3	24,4 6,5	25,1 6,6	25,7 6,8	26,4 7,0	27,0 7,1	27,6 7,3		08			
	085	16,2 4,3	17,4 4,6	18,4 4,9	19,4 5,1	20,3 5,4	21,3 5,6	22,1 5,8	23,0 6,1	23,8 6,3	24,5 6,5	25,3 6,7	26,0 6,9	26,7 7,1	27,4 7,2	28,1 7,4	28,8 7,6	29,4 7,8		085			
	09	17,6 4,6	18,8 5,0	19,9 5,3	21,0 5,5	22,0 5,8	23,0 6,1	23,9 6,3	24,8 6,6	25,7 6,8	26,6 7,0	27,4 7,2	28,2 7,4	28,9 7,6	29,7 7,8	30,4 8,0	31,1 8,2	31,8 8,4		09			
	095	18,4 4,9	19,7 5,2	20,9 5,5	22,0 5,8	23,1 6,1	24,1 6,4	25,1 6,6	26,0 6,9	26,9 7,1	27,8 7,4	28,7 7,6	29,5 7,8	30,3 8,0	31,1 8,2	31,9 8,4	32,6 8,6	33,4 8,8		095			
	10	19,2 5,1	20,6 5,4	21,8 5,8	23,0 6,1	24,1 6,4	25,2 6,7	26,2 6,9	27,2 7,2	28,2 7,6	29,1 7,9	30,0 8,2	30,9 8,4	31,7 8,6	32,5 8,8	33,3 9,0	34,1 9,2	34,9 9,4		10			
	11	20,9 5,5	22,4 5,9	23,7 6,3	25,0 6,6	26,2 6,9	27,4 7,2	28,5 7,5	29,6 7,8	30,6 8,1	31,6 8,4	32,6 8,6	33,5 8,9	34,5 9,1	35,4 9,3	36,2 9,6	37,1 9,8	37,9 10,0		11			
	115	21,8 5,7	23,3 6,1	24,7 6,5	26,0 6,9	27,3 7,2	28,5 7,5	29,6 7,8	30,8 8,1	31,8 8,4	32,9 8,7	33,9 9,0	34,9 9,2	35,8 9,5	36,8 9,7	37,7 10,0	38,6 10,2	39,4 10,4		115			
	12	22,6 6,0	24,1 6,4	25,6 6,8	27,0 7,1	28,3 7,5	29,6 7,8	30,8 8,1	31,9 8,4	33,1 8,7	34,2 9,0	35,2 9,3	36,2 9,6	37,2 9,8	38,2 10,1	39,1 10,3	40,0 10,6	40,9 10,8		12			
	125	23,4 6,2	25,0 6,6	26,6 7,0	28,0 7,4	29,4 7,8	30,7 8,1	31,9 8,4	33,1 8,8	34,3 9,1	35,4 9,4	36,5 9,6	37,6 9,9	38,6 10,2	39,6 10,5	40,6 10,7	41,5 11,0	42,5 11,2		125			
	13	25,1 6,6	26,8 7,1	28,5 7,5	30,0 7,9	31,5 8,3	32,9 8,7	34,2 9,0	35,5 9,4	36,7 9,7	37,9 10,0	39,1 10,3	40,2 10,6	41,4 10,9	42,4 11,2	43,5 11,5	44,5 11,8	45,5 12,0		13			
	14	26,8 7,1	28,6 7,6	30,4 8,0	32,0 8,5	33,6 8,9	35,1 9,3	36,5 9,6	37,9 10,0	39,2 10,4	40,5 10,7	41,7 11,0	42,9 11,3	44,1 11,7	45,3 12,0	46,4 12,3	47,5 12,5	48,5 12,8		14			
	15	28,4 7,5	30,4 8,0	32,3 8,5	34,0 9,0	35,7 9,4	37,2 9,8	38,8 10,2	40,2 10,6	41,6 11,0	43,0 11,4	44,3 11,7	45,6 12,1	46,9 12,4	48,1 12,7	49,3 13,0	50,4 13,3	51,6 13,6		15			
Tutti gli ugelli PA sono forniti con tolleranze di ±5% sui dati riportati nella tabella All PA nozzles are supplied with a ±5% tolerance on data reported in this table	16	30,1 8,0	32,2 8,5	34,2 9,0	36,0 9,5	37,8 10,0	39,4 10,4	41,0 10,8	42,6 11,3	44,1 11,6	45,5 12,0	46,9 12,4	48,3 12,8	49,6 13,1	50,9 13,5	52,2 13,8	53,4 14,1	54,6 14,4		16			
	18	34,3 9,1	36,7 9,7	38,9 10,3	41,0 10,8	43,0 11,4	44,9 11,9	46,7 12,4	48,5 12,8	50,2 13,3	51,9 13,7	53,5 14,1	55,0 14,5	56,5 14,9	58,0 15,3	59,4 15,7	60,8 16,1	62,2 16,4		18			
	19	36,0 9,5	38,5 10,2	40,8 10,8	43,0 11,4	45,1 11,9	47,1 12,4	49,0 13,0	50,9 13,4	52,7 13,9	54,4 14,4	56,1 14,8	57,7 15,2	59,3 15,7	60,8 16,1	62,3 16,5	63,8 16,9	65,2 17,2		19			
	20	38,5 10,2	41,1 10,9	43,6 11,5	46,0 12,2	48,2 12,7	50,4 13,3	52,4 13,9	54,4 14,4	56,3 14,9	58,2 15,4	60,0 15,8	61,7 16,3	63,4 16,8	65,1 17,2	66,7 17,6	68,2 18,0	69,8 18,4		20			
	25	47,7 12,6	51,0 13,5	54,1 14,3	57,1 15,1	59,8 15,8	62,4 16,5	65,0 17,2	67,4 17,8	69,8 18,4	72,1 19,0	74,3 19,6	76,5 20,2	78,6 20,8	80,6 21,3	82,6 21,8	84,5 22,3	86,4 22,8		25			
	30	56,9 15,0	60,8 16,1	64,5 17,0	68,0 18,0	71,3 18,8	74,5 19,7	77,5 20,5	80,5 21,3	83,3 22,0	86,0 22,7	88,7 23,4	91,2 24,1	93,7 24,8	96,2 25,4	98,5 26,0	100,9 26,6	103,1 27,2		30			
	35	66,9 17,7	71,6 18,9	75,9 20,1	80,0 21,1																		

	Fattore di Portata		Portata (l/min) alla Pressione (bar)																				Fattore di Portata	
	Capacity Size		Flow rate (GPM) at Pressure (PSI)																				Capacity Size	
		bar MPa PSI	420 42 6090	430 43 6235	440 44 6380	450 45 6525	460 46 6670	470 47 6815	480 48 6960	490 49 7105	500 50 7250	510 51 7395	520 52 7540	530 53 7685	540 54 7830	550 55 7975	560 56 8120	570 57 8265	580 58 8410	590 59 8555	600 60 8700	bar MPa PSI		
* F.P. UGELLI SPECIALI	01		4,7 1,2	4,8 1,3	4,8 1,3	4,9 1,3	4,9 1,3	5,0 1,3	5,0 1,3	5,1 1,3	5,1 1,4	5,2 1,4	5,2 1,4	5,3 1,4	5,3 1,4	5,4 1,4	5,4 1,4	5,5 1,5	5,5 1,5	5,6 1,5	5,6 1,5		01	
	015		7,0 1,8	7,1 1,9	7,1 1,9	7,2 1,9	7,3 1,9	7,4 1,9	7,4 2,0	7,5 2,0	7,6 2,0	7,7 2,0	7,8 2,0	7,8 2,1	7,9 2,1	8,0 2,1	8,0 2,1	8,1 2,1	8,2 2,2	8,3 2,2	8,3 2,2		015	
	02		9,4 2,5	9,5 2,5	9,6 2,5	9,8 2,6	9,9 2,6	10,0 2,6	10,1 2,7	10,2 2,7	10,3 2,7	10,4 2,7	10,5 2,8	10,6 2,8	10,7 2,8	10,8 2,9	10,9 2,9	11,0 2,9	11,1 2,9	11,2 3,0	11,3 3,0		02	
	O23*		10,2 2,7	10,4 2,7	10,5 2,8	10,6 2,8	10,7 2,8	10,8 2,9	11,0 2,9	11,1 2,9	11,2 3,0	11,3 3,0	11,4 3,0	11,5 3,0	11,6 3,1	11,7 3,1	11,8 3,1	11,9 3,2	12,0 3,2	12,1 3,2	12,2 3,2		O23*	
	O25*		11,5 3,0	11,6 3,1	11,7 3,1	11,9 3,1	12,0 3,2	12,1 3,2	12,3 3,2	12,4 3,3	12,5 3,3	12,6 3,3	12,8 3,4	12,9 3,4	13,0 3,4	13,1 3,5	13,3 3,5	13,4 3,5	13,5 3,6	13,6 3,6	13,7 3,6		O25*	
	O27*		12,5 3,3	12,6 3,3	12,8 3,4	12,9 3,4	13,1 3,5	13,2 3,5	13,4 3,5	13,5 3,6	13,6 3,6	13,8 3,6	13,9 3,7	14,0 3,7	14,2 3,7	14,3 3,8	14,4 3,8	14,6 3,8	14,7 3,9	14,8 3,9	14,9 3,9		O27*	
	03		13,9 3,7	14,1 3,7	14,3 3,8	14,4 3,8	14,6 3,9	14,7 3,9	14,9 3,9	15,1 4,0	15,2 4,0	15,4 4,1	15,5 4,1	15,7 4,1	15,8 4,2	15,9 4,2	16,1 4,3	16,2 4,3	16,4 4,3	16,5 4,4	16,7 4,4		03	
	O32*		14,6 3,8	14,7 3,9	14,9 3,9	15,1 4,0	15,2 4,0	15,4 4,1	15,6 4,1	15,7 4,2	15,9 4,2	16,0 4,2	16,2 4,3	16,3 4,3	16,5 4,4	16,7 4,4	16,8 4,4	17,0 4,5	17,1 4,5	17,2 4,6	17,4 4,6		O32*	
	O35*		16,4 4,3	16,6 4,4	16,8 4,4	17,0 4,5	17,2 4,5	17,3 4,6	17,5 4,6	17,7 4,7	17,9 4,7	18,1 4,8	18,2 4,8	18,4 4,9	18,6 4,9	18,8 5,0	18,9 5,0	19,1 5,0	19,3 5,1	19,4 5,1	19,6 5,2		O35*	
	O37*		17,2 4,5	17,4 4,6	17,6 4,7	17,8 4,7	18,0 4,8	18,2 4,8	18,4 4,9	18,6 4,9	18,8 5,0	19,0 5,0	19,2 5,1	19,3 5,1	19,5 5,2	19,7 5,2	19,9 5,3	20,1 5,3	20,2 5,3	20,4 5,4	20,6 5,4		O37*	
	04		18,6 4,9	18,9 5,0	19,1 5,0	19,3 5,1	19,5 5,2	19,7 5,2	19,9 5,3	20,1 5,3	20,3 5,4	20,6 5,4	20,8 5,5	20,9 5,5	21,1 5,6	21,3 5,6	21,5 5,7	21,7 5,7	21,9 5,8	22,1 5,8	22,3 5,9		04	
	O43*		19,9 5,3	20,1 5,3	20,3 5,4	20,6 5,4	20,8 5,5	21,0 5,6	21,3 5,6	21,5 5,7	21,7 5,7	21,9 5,8	22,1 5,8	22,3 5,9	22,5 6,0	22,7 6,0	23,0 6,1	23,2 6,1	23,4 6,2	23,6 6,2	23,8 6,3		O43*	
	O45		21,1 5,6	21,4 5,6	21,6 5,7	21,8 5,8	22,1 5,8	22,3 5,9	22,6 6,0	22,8 6,0	23,0 6,1	23,3 6,1	23,5 6,2	23,7 6,3	23,9 6,3	24,2 6,4	24,4 6,4	24,6 6,5	24,8 6,6	25,0 6,6	25,2 6,7		O45	
	05		23,4 6,2	23,6 6,2	23,9 6,3	24,2 6,4	24,5 6,5	24,7 6,5	25,0 6,6	25,2 6,7	25,5 6,7	25,7 6,8	26,0 6,9	26,2 6,9	26,5 7,0	26,7 7,1	27,0 7,1	27,2 7,2	27,5 7,3	27,7 7,3	27,9 7,4		05	
Tutti gli ugelli PA sono forniti con tolleranze di ±5% sui dati riportati nella tabella All PA nozzles are supplied with a ±5% tolerance on data reported in this table	O53*		24,6 6,5	24,9 6,6	25,2 6,7	25,5 6,7	25,7 6,8	26,0 6,9	26,3 6,9	26,6 7,0	26,8 7,1	27,1 7,2	27,4 7,2	27,6 7,3	27,9 7,4	28,1 7,4	28,4 7,5	28,6 7,6	28,9 7,6	29,1 7,7	29,4 7,8		O53*	
	O55		25,6 6,8	25,9 6,8	26,2 6,9	26,5 7,0	26,8 7,1	27,1 7,2	27,4 7,2	27,7 7,3	28,0 7,4	28,2 7,5	28,5 7,5	28,8 7,6	29,0 7,7	29,3 7,7	29,6 7,8	29,8 7,9	30,1 8,0	30,4 8,0	30,6 8,1		O55	
	06		28,1 7,4	28,4 7,5	28,7 7,6	29,1 7,7	29,4 7,8	29,7 7,8	30,0 7,9	30,3 8,0	30,6 8,1	30,9 8,2	31,2 8,3	31,5 8,3	31,8 8,4	32,1 8,5	32,4 8,6	32,7 8,6	33,0 8,7	33,3 8,8	33,6 8,9		06	
	O65		30,3 8,0	30,7 8,1	31,0 8,2	31,4 8,3	31,7 8,4	32,1 8,5	32,4 8,6	32,8 8,7	33,1 8,7	33,4 8,8	33,7 8,9	34,1 9,0	34,4 9,1	34,7 9,2	35,0 9,3	35,3 9,3	35,6 9,4	35,9 9,5	36,3 9,6		O65	
	07		32,8 8,7	33,2 8,8	33,6 8,9	33,9 9,0	34,3 9,1	34,7 9,2	35,1 9,3	35,4 9,4	35,8 9,5	36,1 9,5	36,5 9,6	36,8 9,7	37,2 9,8	37,5 9,9	37,9 10,0	38,2 10,1	38,5 10,2	38,9 10,3	39,2 10,4		07	
	O75		35,0 9,3	35,5 9,4	35,9 9,5	36,3 9,6	36,7 9,7	37,1 9,8	37,5 9,9	37,9 10,0	38,2 10,1	38,6 10,2	39,0 10,3	39,4 10,4	39,7 10,5	40,1 10,6	40,5 10,7	40,8 10,8	41,2 10,9	41,5 11,0	41,9 11,1		O75	
	08		37,3 9,9	37,7 10,0	38,2 10,1	38,6 10,2	39,0 10,3	39,5 10,4	39,9 10,5	40,3 10,6	40,7 10,8	41,1 10,9	41,5 11,0	41,9 11,1	42,3 11,2	42,7 11,3	43,1 11,4	43,5 11,5	43,8 11,6	44,2 11,7	44,6 11,8		08	
	O85		39,8 10,5	40,2 10,6	40,7 10,8	41,2 10,9	41,6 11,0	42,1 11,1	42,5 11,2	42,9 11,3	43,4 11,5	43,8 11,6	44,2 11,7	44,7 11,8	45,1 11,9	45,5 12,0	45,9 12,1	46,3 12,2	46,7 12,3	47,1 12,4	47,5 12,6		O85	
	09		43,0 11,4	43,5 11,5	44,0 11,6	44,5 11,8	45,0 11,9	45,5 12,0	46,0 12,2	46,5 12,3	47,0 12,4	47,4 12,5	47,9 12,7	48,3 12,8	48,8 12,9	49,2 13,0	49,7 13,1	50,1 13,2	50,6 13,4	51,0 13,5	51,4 13,6		09	
	O95		45,1 11,9	45,6 12,1	46,1 12,2	46,7 12,3	47,2 12,5	47,7 12,6	48,2 12,7	48,7 12,9	49,2 13,0	49,7 13,1	50,2 13,3	50,6 13,4	51,1 13,5	51,6 13,6	52,1 13,8	52,5 13,9	53,0 14,0	53,4 14,1	53,9 14,2		O95	
	10		47,1 12,5	47,7 12,6	48,2 12,7	48,8 12,9	49,3 13,0	49,9 13,2	50,4 13,3	50,9 13,5	51,4 13,6	51,9 13,7	52,4 13,9	52,9 14,0	53,4 14,1	53,9 14,3	54,4 14,4	54,9 14,5	55,4 14,6	55,9 14,8	56,3 14,9		10	
	11		51,2 13,5	51,8 13,7	52,4 13,9	53,0 14,0	53,6 14,2	54,2 14,3	54,8 14,5	55,3 14,6	55,9 14,8	56,5 14,9	57,0 15,1	57,6 15,2	58,1 15,3	58,6 15,5	59,2 15,6	59,7 15,8	60,2 15,9	60,7 16,0	61,2 16,2		11	



Terms and conditions of sale

1. OBJECT OF THE SALE

Supplies include only those items included in the order confirmation signed by the seller. Illustrations and data resulting from catalogues and price lists are indicative and subject to modifications without notice.

2. DELIVERIES

Dispatch dates are indicative and not binding. Any delay in the delivery or the partial order dispatch does not give the buyer the right to cancel the sale, to be entitled to direct or indirect damages, or to defer payments for supplies already delivered in relation to the maturity dates previously agreed upon.

3. TRANSPORT

Goods always travel at buyer's own risk whatever the delivery terms may be.

4. PAYMENT

All payments shall be made with no fail in the place of issue of the invoice at the conditions stated on it, independently from any claim or objection. Once the term of maturity is due, the arrears in force will have effect, as stated by the legislative Decree 231 dated 9 October 2002, in addition to a compensation for any higher expenses. The supplies whose gross amount is lower than Euro 300.00 shall be cash on delivery only. The non compliance with the payment conditions enables the seller to suspend the dispatch of new orders.

5. PRICES

Prices shown are for goods delivered ex warehouse from our factory and do not include: value added tax, stamp duty, package and freight taxes and expenses. List prices are not binding and can be changed depending on increased cost of raw materials and manpower.

6. WARRANTY

Our products are guaranteed for 12 months from delivery date. The warranty consists of the free replacement of items due to an ascertained faulty construction and not because of faults deriving from normal deterioration, negligence, inexperience or incompetence in use or application. The above mentioned replacement shall be arranged by the seller after a thorough check of the faults complained about. Transport of the parts to be repaired or replaced is charged to

DNV BUSINESS ASSURANCE
MANAGEMENT SYSTEM CERTIFICATE

Certificato No. / Certificate No. **CERT-02444-98-AQ-BOL-SINCERT**
Si attesta che / This is to certify that
P.A. S.p.A.

Sede Centrale: Via Milano, 13 - 42048 Rubiera (RE) - Italy
Stabilimento operativo Chierici Tito: Via L.B. Alberti, 4 - 42048 Rubiera (RE) - Italy
Stabilimento operativo MEC TO: Via Mantegna, 9/B - 42038 Rubiera (RE) - Italy

è conforme ai requisiti della norma per i sistemi di gestione:
has been found to conform to the management system standard:
UNI EN ISO 9001:2008 (ISO 9001:2008)

Questa Certificazione è valida per il seguente campo applicativo:
This Certificate is valid for the following product or service ranges:

Progettazione, produzione, vendita e commercializzazione di: pistole, valvole, lance, ugelli, componenti elettrici (preaccenditori, flussostati e dosatori) per il lavaggio ad alta pressione; testine rotanti per il lavaggio cisterne. Progettazione, produzione e commercializzazione di articoli per nebulizzazione e trussatura.
Progettazione, costruzione stampi e stampaggio di materie plastiche.
Produzione di particolari meccanici in acciaio inox e in altri metalli su disegno del cliente
(Settore EA : 18 - 14 - 17)

Design, manufacture, sale and trade of: spray guns, valves, lances, nozzles, electrical components (pressure switches, flow switches and injectors) for high pressure washing; rotary nozzles for tank washers. Design, manufacture, trade of spraying and liquid transfer equipment.
Design and manufacture moulds. Moulding plastic material.
Manufacture of inox and other metal mechanical items according to customer drawing
(Sector EA : 18 - 14 - 17)

Date Prima Emissione/Initial Certification Date:
1998-01-05
Il Certificato è valido fino al:
This Certificate is valid until:
2015-08-07
L'audit è stato eseguito sotto la supervisione di:
The audit has been performed under the supervision of:

ACCREDIA
ITALIAN ACCREDITATION BODY

Lungo e Dove/Place and Date:
Agrate Brianza (MB), 2013-06-28
Per l'Organismo di Certificazione:
For the Accredited Unit:
Zeno Beltrami
Zeno Beltrami
Management Representative

Francesco Spaggiari
Lead Auditor

La validità del presente Certificato è subordinata al rispetto delle condizioni contenute nel Contratto di Certificazione.
Each of the terms of conditions on which the Certificate Agreement was made this Certificate is valid.
DIREZIONE GENERALE: CERTIFICAZIONE E SERVIZI - Via Mantegna, 9/B - 42038 Rubiera (RE) - Tel. 0522/810001 - 810002/03/04/05/06/07/08/09/10/11/12/13/14/15/16/17/18/19/20/21/22/23/24/25/26/27/28/29/30/31/32/33/34/35/36/37/38/39/40/41/42/43/44/45/46/47/48/49/50/51/52/53/54/55/56/57/58/59/60/61/62/63/64/65/66/67/68/69/70/71/72/73/74/75/76/77/78/79/80/81/82/83/84/85/86/87/88/89/90/91/92/93/94/95/96/97/98/99/100

the buyer. As for the parts not built by P.A., the warranty is limited to what acknowledged by their suppliers. The seller is exempted from any responsibility and obligation for damages endured by persons or things depending on the use of the goods supplied, possible hidden, construction or material faults or lack of essential requirements. The seller is also exempted from any responsibility deriving from any violation of patents, trade marks or models detected in the goods supplied as a whole. All relationship between various sellers inside the same economic operation is regulated by general law standards. Special regulations concerning consumers' rights are not taken into consideration. In any case the buyer, with the order confirmation, waives the right to recede, even though he is the final seller belonging to one operation. The above mentioned warranty remains anyway valid for the indicated period of time and under the conditions specified.

7. PROPERTY RESERVE

The goods to be sold are exclusive property of the seller up to the total payment of the price agreed upon, as provided for by art. 1523 c.c.

8. CONTROVERSIES

Any controversy is exclusively devolved to the competence of the law court in Reggio Emilia.