


# Annovi Reverberi Motor pump combinations



The choice of perfection


up to 85 °C

ideal for the  
food industry

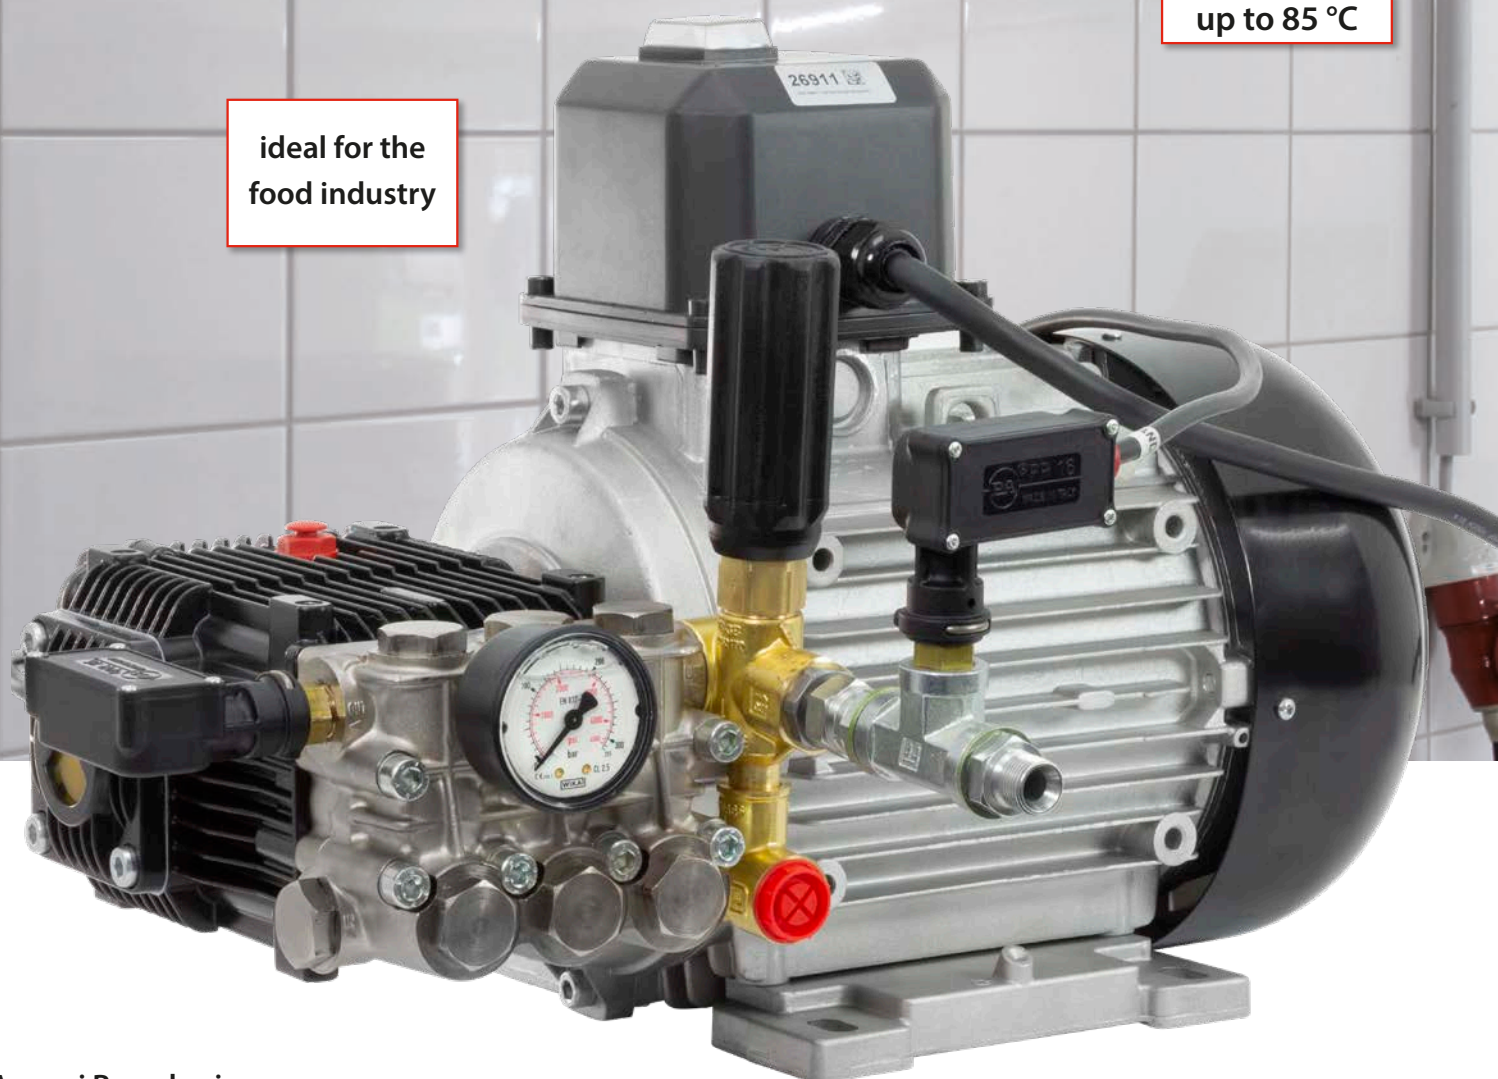

## Annovi Reverberi Hotwater-Motor pump combinations

- Equipped with a regulation valve, delayed total stop control, pressure gauge, 5 m electric cable and an on-off switch
- 1,450 revolutions
- Pressure: 150 bar, flow: 15 l/min / 21 l/min
- Temperature max. 85 °C at min. 2 bar inlet pressure
- 400 Volt, 4 / 5.5 kilowatt

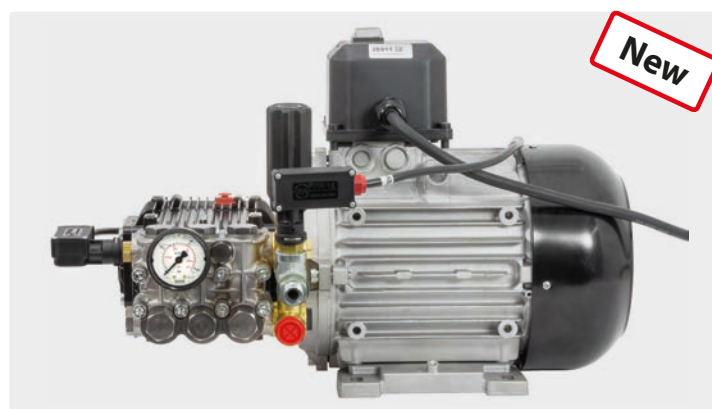

400 V. All models are equipped with a regulation valve, delayed total stop control, pressure gauge, 5 m electric cable and an on-off switch.

⊕ 1/2" F ⊖ 3/8" M.

Max. 85 °C at min. 2 bar inlet pressure

Type:	MTP HRWH 15.15	MTP HRWH 21.15
Max. pressure	150 bar	150 bar
Max. flow	15 l/min	21 l/min
Max. temperature	85 °C	85 °C
Inlet / outlet	1/2" F / 3/8" M	1/2" F / 3/8" M
Volt	400	400
Kilowatt	4	5.5
Revolutions	1,450	1,450

R+M Nr.	Pressure	Flow	Revolutions	KW	Type
170 269 18	150	15	1.450	4	MTP HRWH 15.15
170 269 11	150	21	1.450	5,5	MTP HRWH 21.15