


- ✓ Easy installation
- ✓ Self rotating and stainless steel
- ✓ Adjustable and non adjustable versions
- ✓ Protection plate available
- ✓ Maintenance free

Clean vent hoods, trash chutes, pipes, totes, manholes and most containers. This self rotating unit is completely maintenance free. The rotating head spins within the protective cage directing the high pressure spray to your surface. The installation is simple and fast.

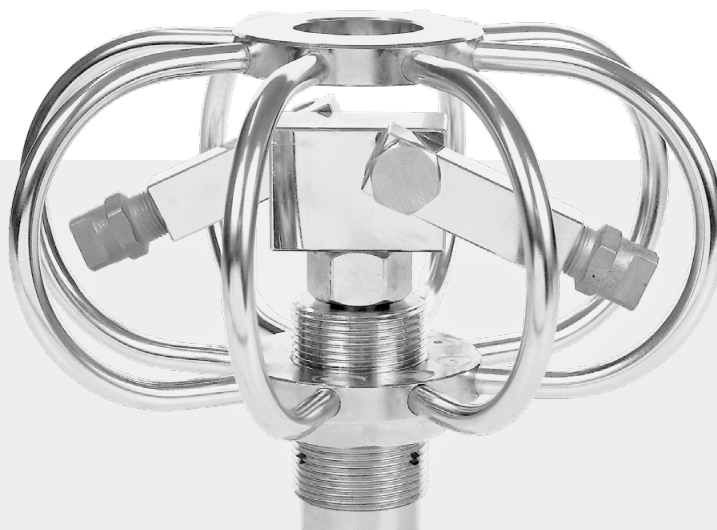

(81.522)

\* Nozzles not included.

**Important:**  
Do not use unprotected!

### TYR \*adjustable\*

The adjustable arms allow different spray angles. Perfect for horizontal ducts and tanks.

warm water		cold water		ø	IN	Height	Weight
TYR-2s	TYR-3s	TRR-2s	TRR-3s				
Part No.	Part No.	Part No.	Part No.				
81.501	81.701	85.501	85.701	75	G1/4" F	60	0.5kg
81.502	81.702	85.502	85.702	75	G3/8" F	60	0.5kg
81.521	81.721	85.521	85.721	150	G1/4" F	70	0.8kg
81.522	81.722	85.522	85.722	150	G3/8" F	70	0.8kg
81.551	81.751	85.551	85.751	300	G1/4" F	70	1.1kg
81.552	81.752	85.552	85.752	300	G3/8" F	70	1.1kg
81.561	81.761	85.561	85.761	400	G1/4" F	70	1.3kg
81.562	81.762	85.562	85.762	400	G3/8" F	70	1.3kg
81.571	81.771	85.571	85.771	500	G1/4" F	70	1.6kg
81.572	81.772	85.572	85.772	500	G3/8" F	70	1.6kg
81.581	81.781	85.581	85.781	600	G1/4" F	70	1.8kg
81.582	81.782	85.582	85.782	600	G3/8" F	70	1.8kg



(81.422)

\* Nozzles not included.

**Important:**  
Do not use unprotected!

### TYR \*fixed\*

The non adjustable arms with fixed spray angle is perfect for vertical chutes.

warm water		cold water		ø	IN	Height	Weight
TYR-2f	TYR-3f	TRR-2f	TRR-3f				
Part No.	Part No.	Part No.	Part No.				
81.401	81.601	85.401	85.601	75	G1/4" F	60	0.5kg
81.402	81.602	85.402	85.602	75	G3/8" F	60	0.5kg
81.421	81.621	85.421	85.621	150	G1/4" F	70	1.0kg
81.422	81.622	85.422	85.622	150	G3/8" F	70	1.0kg
81.451	81.651	85.451	85.651	300	G1/4" F	70	1.3kg
81.452	81.652	85.452	85.652	300	G3/8" F	70	1.3kg
81.461	81.661	85.461	85.661	400	G1/4" F	70	1.5kg
81.462	81.662	85.462	85.662	400	G3/8" F	70	1.5kg
81.471	81.671	85.471	85.671	500	G1/4" F	70	1.6kg
81.472	81.672	85.472	85.672	500	G3/8" F	70	1.6kg
81.481	81.681	85.481	85.681	600	G1/4" F	70	1.8kg
81.482	81.682	85.482	85.682	600	G3/8" F	70	1.8kg

#### TECHNICAL DATA

<b>Pressure</b>	275 bar	<b>Nozzles</b>	2f/2s for 2x 1/8" Nozzles* 3f/3s for 3x 1/8" Nozzles*
<b>Temperature</b>	TYR 120°C / TRR 30°C	<b>Throughput</b>	ph 3 - 12
<b>Inlet</b>	see chart		
<b>Body</b>	stainless steel		
<b>RPM</b>	TYR 2000 rpm / TRR 1000 rpm		