


Everything for professional carwash foaming

easy wash 365+
easy foam 365+

Everything for professional carwash foaming



The choice of perfection

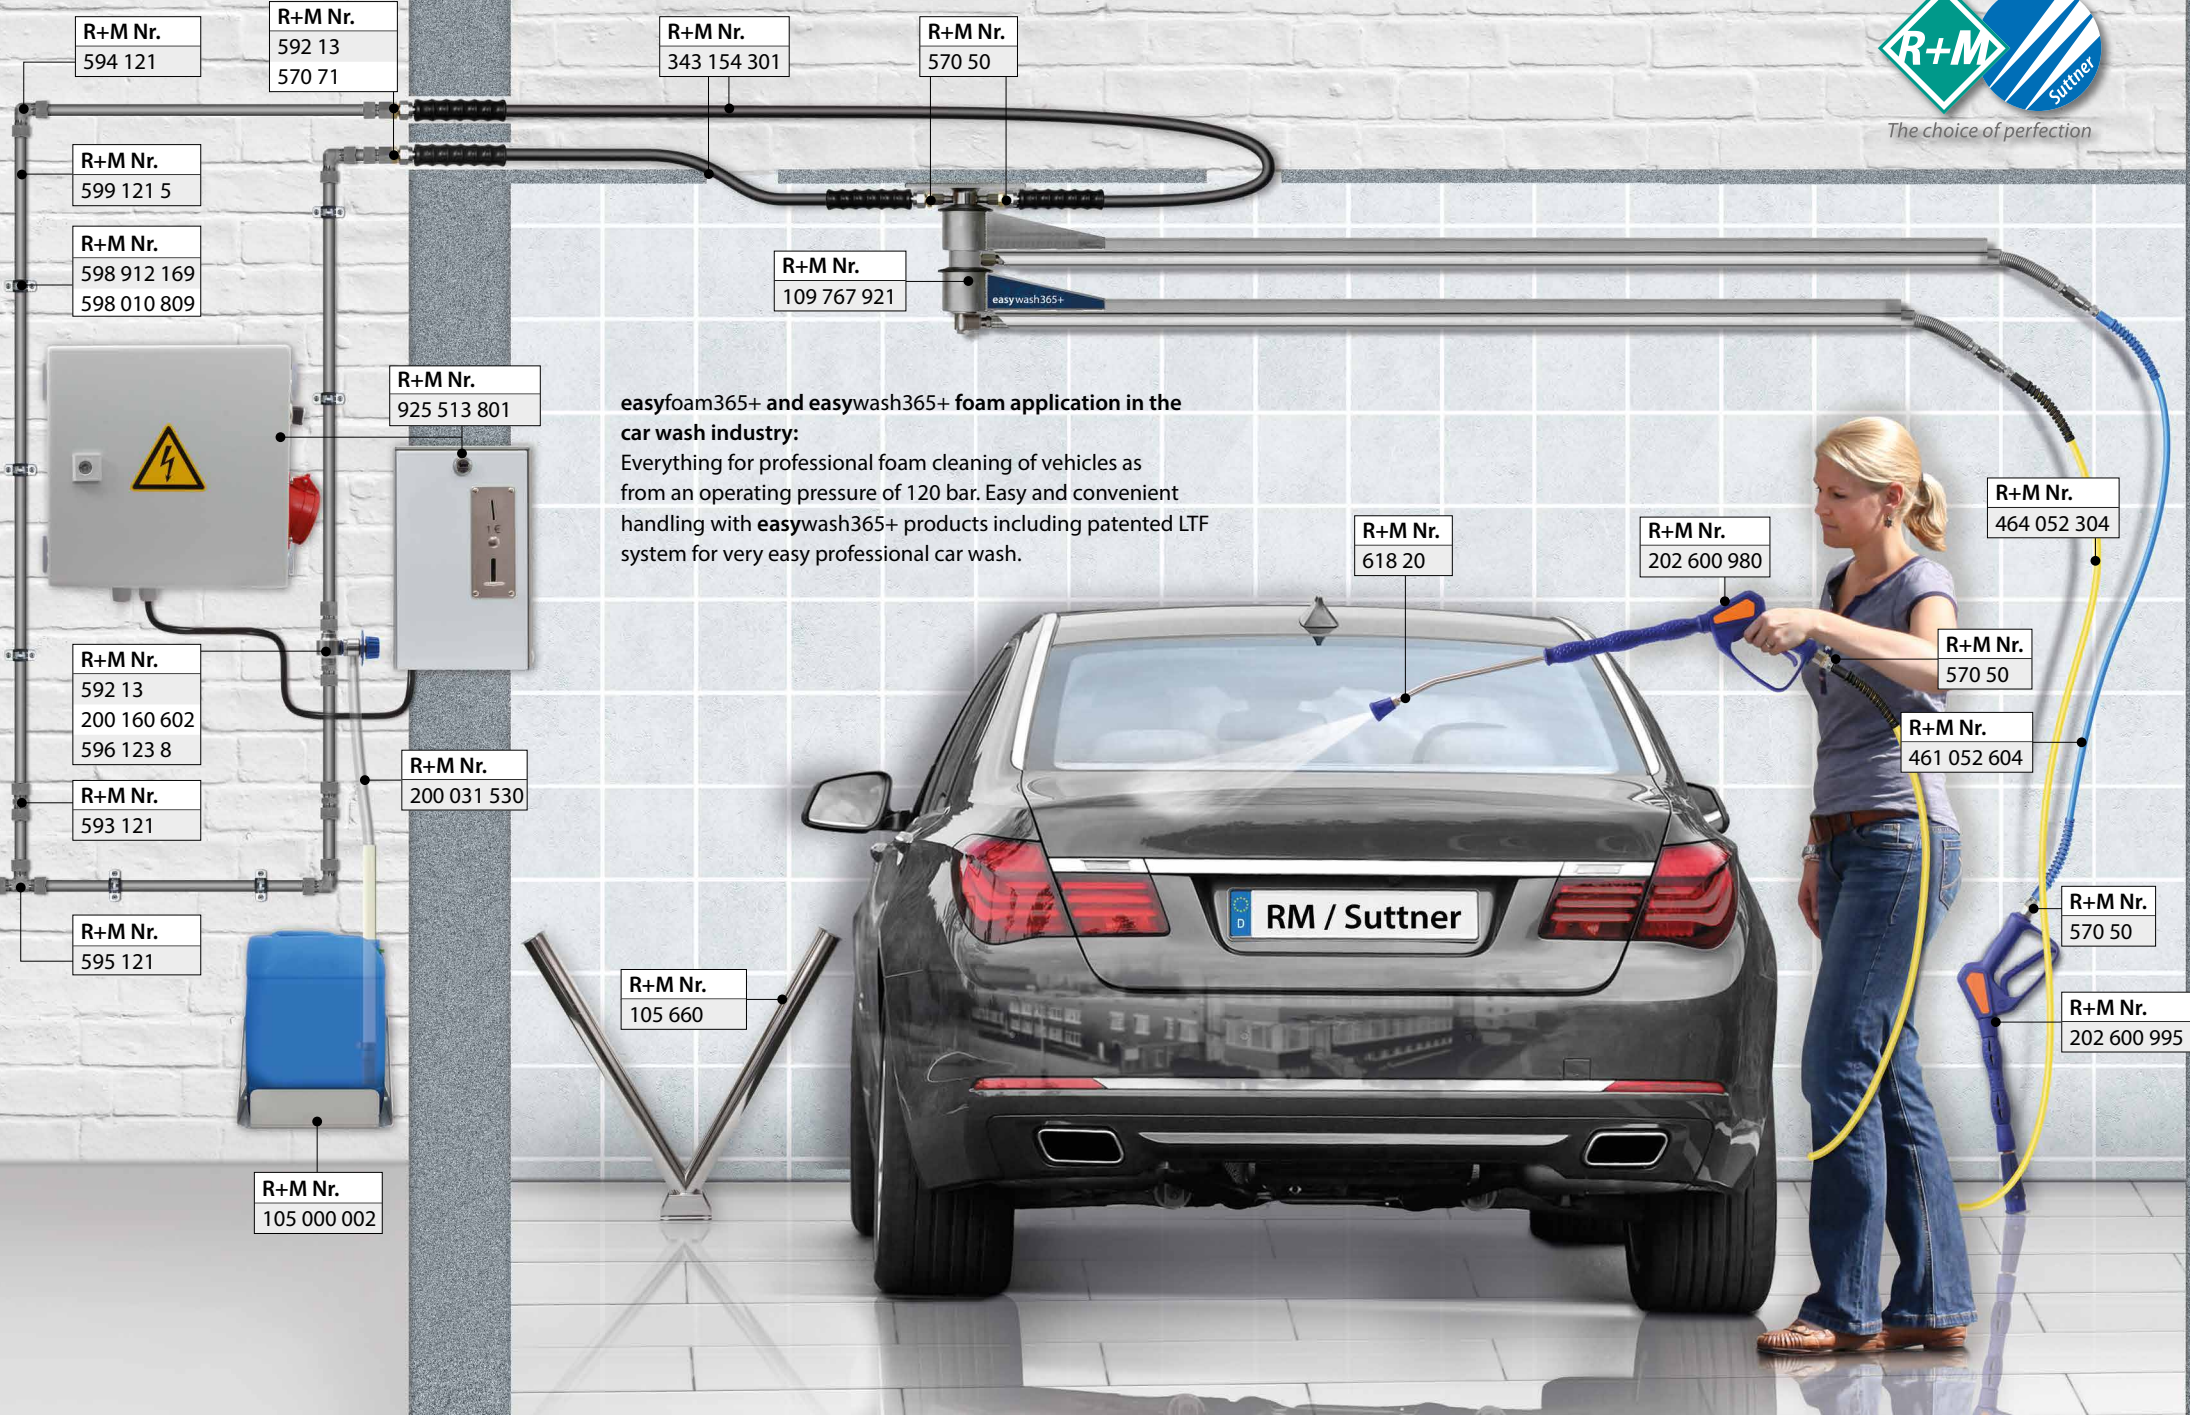

R+M Nr.
594 121

R+M Nr.
592 13
570 71

R+M Nr.
343 154 301

R+M Nr.
570 50

R+M Nr.
599 121 5

R+M Nr.
598 912 169
598 010 809

R+M Nr.
109 767 921

easywash365+

R+M Nr.
925 513 801

easyfoam365+ and easywash365+ foam application in the car wash industry:

Everything for professional foam cleaning of vehicles as from an operating pressure of 120 bar. Easy and convenient handling with **easywash365+** products including patented LTF system for very easy professional car wash.

R+M Nr.
618 20

R+M Nr.
202 600 980

R+M Nr.
464 052 304

R+M Nr.
570 50

R+M Nr.
461 052 604

R+M Nr.
592 13
200 160 602
596 123 8

R+M Nr.
593 121

R+M Nr.
200 031 530

R+M Nr.
595 121

R+M Nr.
105 000 002

R+M Nr.
105 660

R+M Nr.
570 50

R+M Nr.
202 600 995

RM / Suttner

Everything for professional carwash foaming

Very easy handling

LTF

Minimum holding and trigger force by the worldwide unique LTF technology.

Professional high pressure spray gun characterized by the ingenious trigger force - ergonomic and very easy handling.

More performance, more durability and more ergonomics:

Our engineering team always aims at searching for, developing and testing new solutions in order to steadily make high pressure cleaning more effective.

With our patented "Low Trigger Force" your benefit is a very easy handling even in case of long high pressure applications! You are invited to experience 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

You can rely on us. We are aware of your requirements - after all, it is precisely in these that we perceive the key to our success.

Motor pump combination:

Annovi Reverberi type MTP HXM 15.15 400 V. This model is equipped with a regulation valve, delayed total stop control, pressure gauge, 5 m electric cable and an on-off switch.

Inlet 1/2" M, outlet 3/8" M. Max. 30 °C





R+M Nr.
170 208 711

CARWASH COMFORT

The new hose wonder in self-service washing bays

- » light weight, 92 g/m at DN 6. More than half in weight in comparison to an usual self-service hose
- » chemically resistant, smooth interior made out of PES
- » transparent surface made out of a thermoplastic elastomer
- » oil-, UV-, ozone-resistant and weatherproof
- » flexible in case of low temperatures: -40 °C – +60 °C, -40 °F – +140 °F
- » high-tensile polyester reinforcing, working pressure of up to 200 bar
- » burstpressure > 800 bar.

1/4" female thread (DKR) : 1/4" female thread (DKR)



R+M Nr.	length
461 052 603 5	3.5 m
461 052 603 7	3.7 m
461 052 604	4.0 m
461 052 604 2	4.2 m
461 052 604 5	4.5 m
461 052 604 7	4.7 m
461 052 605	5.0 m

R+M Nr.	length
464 052 303 5	3.5 m
464 052 303 7	3.7 m
464 052 304	4.0 m
464 052 304 2	4.2 m
464 052 304 5	4.5 m
464 052 304 7	4.7 m
464 052 305	5.0 m

Quality
Made in Germany
Suttner
certified according
to ISO 9001:2008
and TN-S A75-018



Carwash Solutions



www.rm-suttner.com

Your requirements – our strong point!




The original

Everything for professional carwash foaming



The choice of perfection

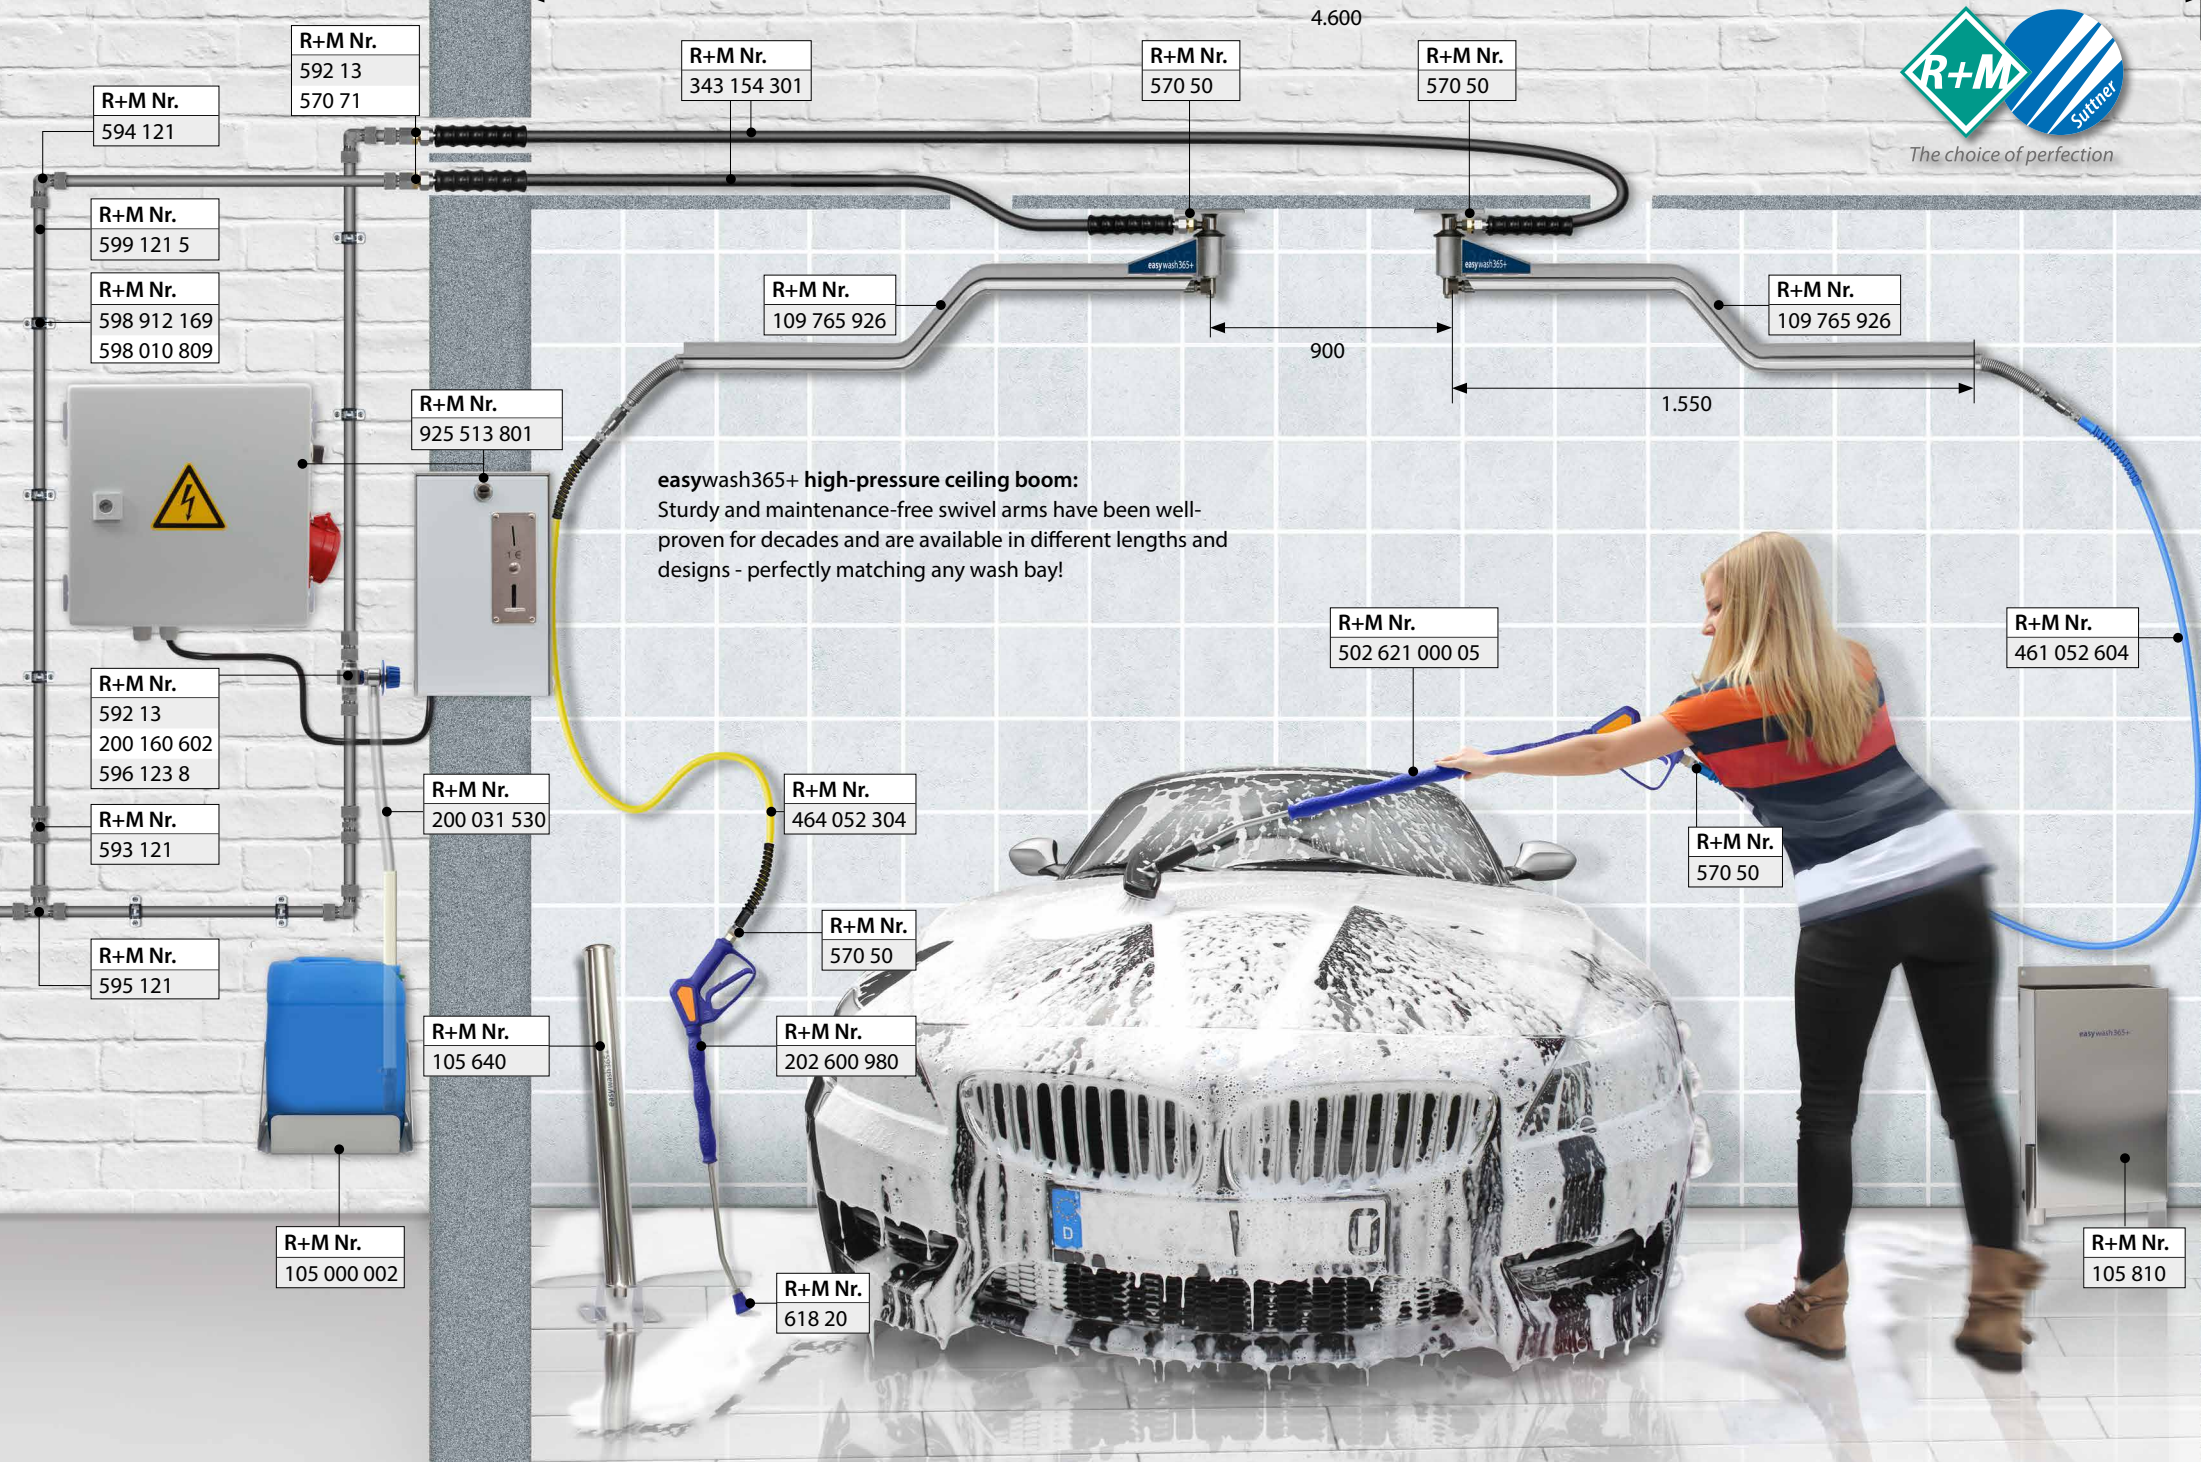

Everything for professional carwash foaming

turbofoam365+ brush lance

easywash365+ spray gun, lance and brush with turbofoam365+ air injector

- » easywash365+ spray gun, lance and brush with turbofoam365+ air injector
- » convincing foam quality due to the newly developed air injector
- » especially soft cleaning with very soft hog bristles with forked ends
- » Cool & Compact insulation for a comfortable use
- » ergonomic handling by means of the well-tried easywash365+ gun with LTF technology
- » lance swivel ST-345 is optionally available



Convincing foam quality!

R+M Nr.
502 621 100 05



turbofoam365+ brush lance:

lance with moulded insulation Cool & Compact, easywash365+ spray gun, easywash365+ lance swivel, air injector turbofoam365+ and brush (bristles 60 mm). 20-150 bar. Max. 50 °C



easywash365+ brush holder:

Container with overflow and lateral drain for cleaning.

For wall and floor mounting.

H x W x D = 670 x 340 x 143 mm

R+M Nr.
105 810



RM Suttner products, perfectly in tune with each other to achieve the best possible cleaning result.

Underbody lance ST-97.1


Underbody lance for self-service underbody washing

- » long underbody lance for best accessibility of the entire underside with smoothly running plastic castors (POM) for easily manoeuvring
- » excellent cleaning effect without affecting moving parts, brakes or electric components
- » max. 120 bar in case of use at self-service washing bays max. 40 l/min. 100 °C
- » stainless steel lance covered with a soft plastic coating




R+M Nr.
200 097 802

High cleaning power!

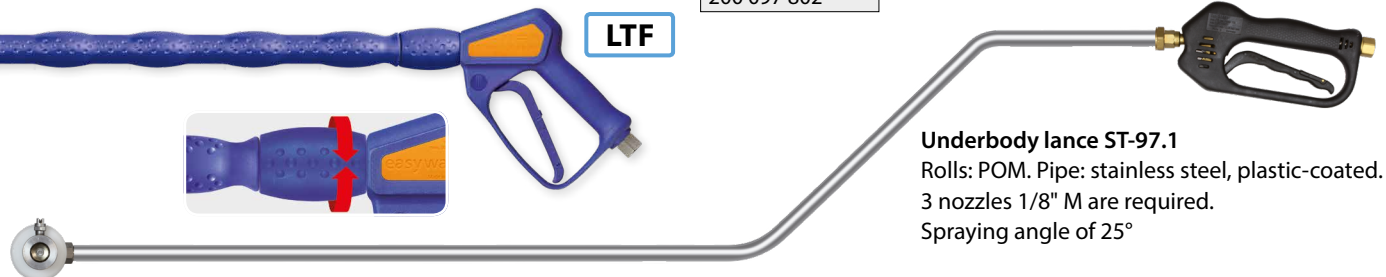

Underbody lance ST-97.1

Rolls: POM. Pipe: stainless steel, plastic-coated. 3 nozzles 1/8" M are required. Spraying angle of 25°

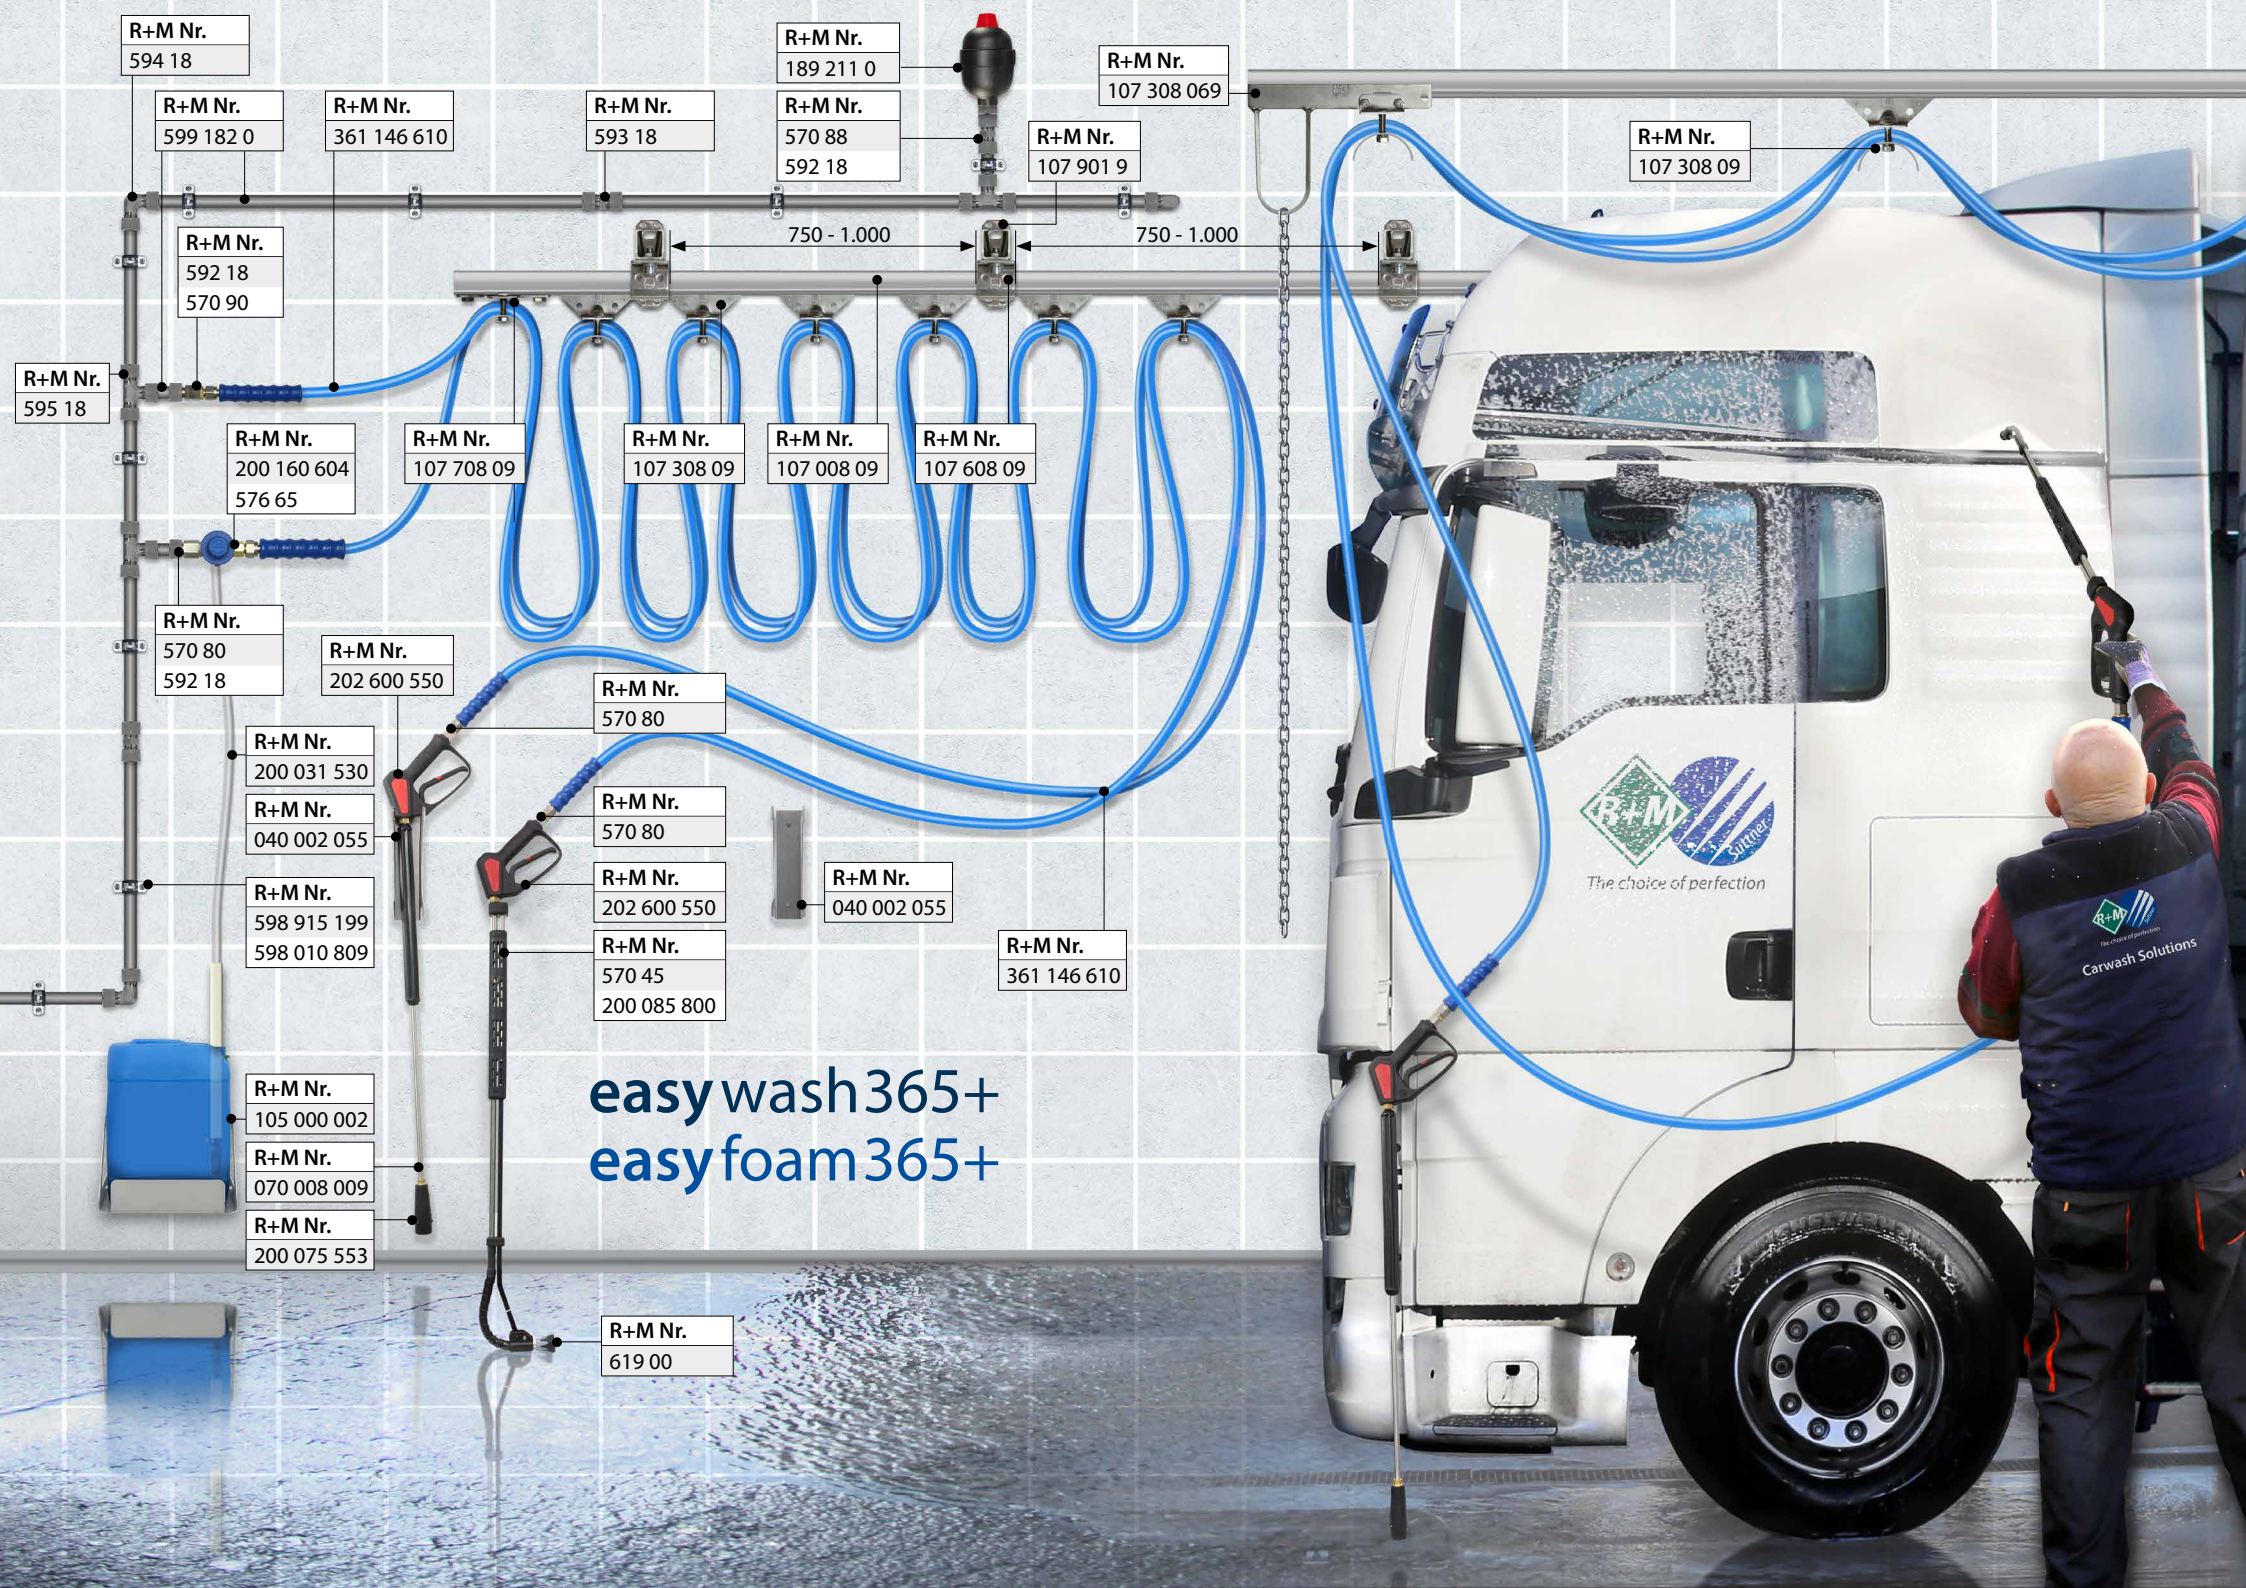

R+M Nr.
594 18

R+M Nr.
189 211 0

R+M Nr.
107 308 069

R+M Nr.
599 182 0

R+M Nr.
361 146 610

R+M Nr.
593 18

R+M Nr.
570 88
592 18

R+M Nr.
107 901 9

R+M Nr.
107 308 09

750 - 1.000

750 - 1.000

R+M Nr.
592 18
570 90

R+M Nr.
595 18

R+M Nr.
200 160 604
576 65

R+M Nr.
107 708 09

R+M Nr.
107 308 09

R+M Nr.
107 008 09

R+M Nr.
107 608 09

R+M Nr.
570 80
592 18

R+M Nr.
202 600 550

R+M Nr.
570 80

R+M Nr.
200 031 530

R+M Nr.
040 002 055

R+M Nr.
570 80

R+M Nr.
202 600 550

R+M Nr.
040 002 055

R+M Nr.
598 915 199
598 010 809

R+M Nr.
570 45
200 085 800

R+M Nr.
361 146 610

R+M Nr.
105 000 002

R+M Nr.
070 008 009

R+M Nr.
200 075 553

R+M Nr.
619 00

easy wash 365+ easy foam 365+



Carwash Solutions



The choice of perfection

Your requirements – our strong point!

easyfoam365+ foam application in truck wash industry:

Everything for professional foam cleaning of vehicles as from an operating pressure of 120 bar.

Take advantage of our product range, perfectly in tune to each other to achieve the best possible cleaning result.

R+M Nr.
170 260 58



Motor pump combination:

400 V. This model is equipped with a regulation valve, delayed total stop control, pressure gauge, 5 m electric cable and an on-off switch. Inlet 1/2" M, outlet 3/8" M. Max. 150 bar at 26 l/min. Max. 30 °C



Foam head ST-75:

Brass. ST-75 with nozzle.
Max. 350 bar / 100 °C

R+M Nr.	Size	Inlet
200 075 553	1.90 mm	1/4" F

LTF



Professional gun:

with patented LTF technology
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	Outlet	Inlet
202 600 550	1/4" F	3/8" F swivel



easyfoam365+ injector:

3/8" F : 3/8" M : hose tail 9 mm.
Injector ST-160 with metering valve ST-161.
Max. 350 bar / 90 °C

R+M Nr.	Size
200 160 604	1.6 mm

easy wash 365+
easy foam 365+

